

Mini / EvoSIGNAL

Mini TwinLIGHT Combi 24VAC/DC RD



| | |
|-----------|----------------|
| Part No.: | 460.110.75 |
| Series: | EvoSIGNAL Mini |



| MECHANICAL DATA | |
|------------------------------|-----------------------------|
| Height | 85 mm |
| Diameter | 62 mm |
| Materials | PC PC/ABS |
| Dome colour | Red |
| Housing colour | Grey |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Type of fixing | Wall mounting |
| Service life optical | 50,000 h minimum |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 100 g |
| Product weight | 78 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage type | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 98 mA |
| Rated inrush current | 3000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | III |

| OPTICAL DATA | |
|----------------------|------------------------|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Permanent TwinLight |
| Blink frequency (Hz) | 1 Hz |

| ACUSTICAL DATA | |
|-------------------------------|-------------|
| Volume/dB(max) at 1m distance | 95,0 dB (A) |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / EvoSIGNAL

Mini TwinLIGHT Combi 24VAC/DC RD

| | |
|-----------------------|-------------------------------|
| Acoustic signal image | Continuous tone Pulse tone |
| Number of tones | 2 tone |
| Audio frequency | 4000 Hz |

DRAWING

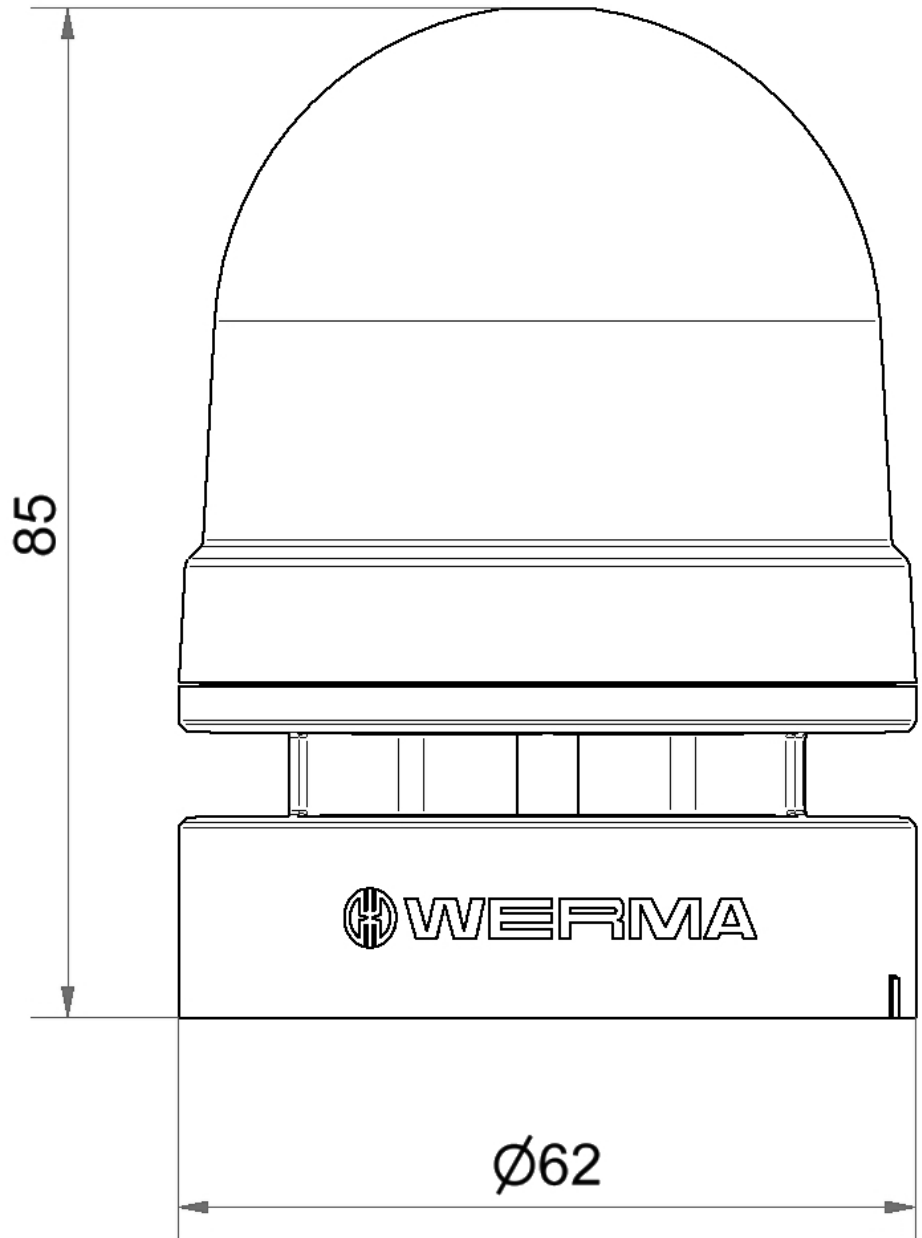

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.