




## Photoelectric sensor

### T30-SP6-LP-Q

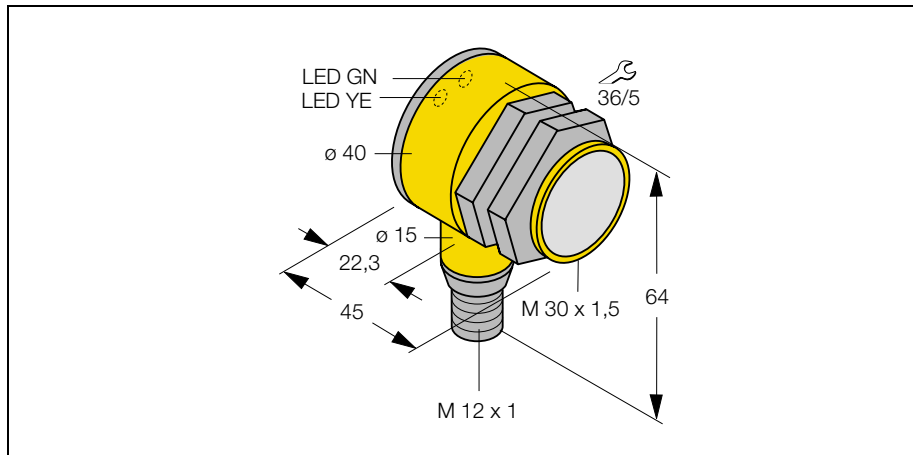

- Retro-reflective sensor with polarising filter
- Connector, *eurofast*<sup>®</sup>

#### Wiring diagram




#### Function principles

Retro-reflective mode sensors combine both the emitter and receiver into a single housing. The light beam from the emitter is bounced back to the receiver from a special retro-reflective target. An object is detected by interrupting this beam. Retro is the most popular mode for conveyor applications where the objects are large boxes, cartons etc.

#### Excess gain curve

Excess gain in relation to the distance

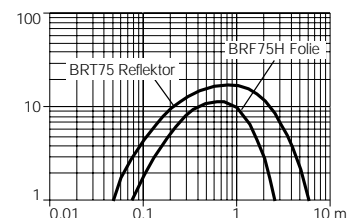

<b>Type</b>	T30-SP6-LP-Q
Ident-No.	3467700
<b>Max. Erfassungsbereich</b>	6,0 m
Operating mode	Retro-reflective sensor with polarising filter
Type of light	red
Wave length	680 nm
Adjustment variable 1	light and dark operate or light operate and alarm
Adjustment means 1	output programmable
<b>Rated operational voltage (DC) <math>U_e</math></b>	10...30 VDC
Rated operational current (DC) $I_e$	150 mA
No-load current $I_0$	≤ 30,0 mA
Short-circuit protection	yes, cyclic
Reverse polarity protection	yes
Output function	complementary outputs/normally open, PNP
Max. switching frequency	≤ 0,16 kHz
Max. switch-on delay	≤ 100 ms
Overload trip point	> 220 mA
Degree of protection	IP 67
Operation temperature	-40...70 °C
<b>Housing style</b>	cylindric, thread; T30
Dimensions	64,0 x 45,0 mm
Housing material	Kunststoff; PBT
Lens	acrylic
Wiring	Connectoreurocon
<b>Supply voltage indication</b>	LED; green
Switching status indication	LED; yellow
Error indication	LED; green flashing
Alarmausgang	LED; yellow flashing