# **SIEMENS**

#### Data sheet

## 3RP15 05-1RW30



MULTIFUNCTION TIME RELAY 15 TIME RANGES MIT SCREW CONNECTION 2 CHANGEOVER, 8 FUNCTIONS POSITIVELY DRIVEN + GOLD-PLATED RELAY CONTACTS, AC/DC 24V...240V

Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		timing relay
mounting position		any
Product function non-volatile		No
Product component		
<ul> <li>Relay output</li> </ul>		Yes
<ul> <li>semi-conductor output</li> </ul>		No
Installation altitude at height above sea level	m	2 000
maximum		
Ambient temperature		
<ul> <li>during operation</li> </ul>	°C	-25 +60
<ul> <li>during storage</li> </ul>	°C	-40 +85
<ul> <li>during transport</li> </ul>	°C	-40 +85
Relative humidity during operation	%	10 95
EMC emitted interference acc. to IEC 61812-1		EN 61000-6-4(3)
EMI immunity acc. to IEC 61812-1		EN 61000-6-2
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Surge voltage resistance Rated value	V	4 000

Active power loss total typical	W	2
Equipment marking acc. to DIN 40719 extended		K
according to IEC 204-2 acc. to IEC 750		
Equipment marking acc. to DIN EN 81346-2		К
Category acc. to EN 954-1		none
Protection against electrical shock		finger-safe
Protection class IP		IP20
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at		100 000
230 V typical		
Operating frequency with 3RT2 contactor maximum	1/h	5 000
Shock resistance acc. to IEC 60068-2-27		11g / 15 ms
Relative repeat accuracy	%	1
Recovery time	ms	150
Minimum ON period	ms	35
Degree of pollution		3
Insulation voltage for overvoltage category III	V	300
according to IEC 60664 with degree of pollution 3 Rated value		
Relative setting accuracy relating to full-scale value	%	5
י זכומעים סבעוווע מכנעומנץ ושומעווע נט ועוו-גנאוש אאועפ	/0	
Switching Function:		
Switching function		
• ON-delay		Yes
<ul> <li>ON-delay/instantaneous contact</li> </ul>		No
<ul> <li>passing make contact</li> </ul>		Yes
<ul> <li>passing make contact/instantaneous contact</li> </ul>		No
• OFF delay		No
<ul> <li>flashing asymmetrically starting with interval</li> </ul>		No
<ul> <li>flashing asymmetrically starting with pulse</li> </ul>		
		No
<ul> <li>flashing symmetrically starting with pulse</li> </ul>		
		No
<ul><li>flashing symmetrically starting with pulse</li><li>flashing symmetrically starting with</li></ul>		No No
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> </ul>		No No
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with</li> </ul>		No No Yes
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval/instantaneous</li> <li>star-delta circuit</li> </ul>		No No Yes No
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval/instantaneous</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul>		No No Yes No
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval/instantaneous</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul> Switching function with control signal		No No Yes No
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul> Switching function with control signal <ul> <li>additive ON delay</li> </ul>		No No Yes No No Yes
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul> Switching function with control signal <ul> <li>additive ON delay</li> <li>passing break contact</li> </ul>		No No Yes No No Yes
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval/instantaneous</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul> Switching function with control signal <ul> <li>additive ON delay</li> <li>passing break contact</li> <li>OFF delay</li> </ul>		No No Yes No No Yes Yes
<ul> <li>flashing symmetrically starting with pulse</li> <li>flashing symmetrically starting with pulse/instantaneous</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>flashing symmetrically starting with interval</li> <li>star-delta circuit</li> <li>star-delta circuit with delay time</li> </ul> Switching function with control signal <ul> <li>additive ON delay</li> <li>passing break contact</li> </ul>		No No Yes No No Yes

<ul> <li>ON-delay/OFF-delay/instantaneous</li> </ul>	No
<ul> <li>passing break contact/instantaneous</li> </ul>	No
<ul> <li>additive ON delay/instantaneous</li> </ul>	No
<ul> <li>ON-delay/OFF-delay</li> </ul>	Yes
<ul> <li>passing make contact</li> </ul>	No
<ul> <li>passing make contact/instantaneous contact</li> </ul>	No
• pulse delayed	No
<ul> <li>pulse delayed/instantaneous</li> </ul>	No
<ul> <li>pulse-shaping/instantaneous</li> </ul>	No
Switching function of interval relay with control signal	
<ul> <li>retrotriggerable with deactivated control</li> </ul>	No
signal/instantaneous contact	
<ul> <li>retrotriggerable with activated control signal</li> </ul>	No
<ul> <li>retrotriggerable with activated control</li> </ul>	No
signal/instantaneous contact	
<ul> <li>retriggerable with deactivated control signal</li> </ul>	No
Design of the control terminal non-floating	Yes

Control circuit/ Control:		
Adjustable time	S	0.05 360 000
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1	Hz	50 60
Control supply voltage 1		
• with AC		
— at 50 Hz	V	24 240
— at 60 Hz	V	24 240
• for DC	V	24 240
Operating range factor control supply voltage rated value		
• with AC		
— at 50 Hz		0.85 1.1
— at 60 Hz		0.85 1.1
• for DC		0.85 1.1

## Auxiliary circuit:

Contact reliability of the auxiliary contacts		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)	
Material of switching contacts	_	AgSnO2	
Operating current of the auxiliary contacts			
• at AC-15			
— at 24 V	А	3	
— at 250 V	А	3	
• at DC-13			
— at 24 V	А	1	

— at 125 V	А	0.2
— at 250 V	А	0.1
Design of the fuse link for short-circuit protection of the auxiliary switch required		fuse gL/gG: 4 A
Thermal current	А	5
Number of NC contacts		
<ul> <li>delayed switching</li> </ul>		0
<ul> <li>instantaneous contact</li> </ul>		0
Number of NO contacts		
<ul> <li>delayed switching</li> </ul>		0
<ul> <li>instantaneous contact</li> </ul>		0
Number of CO contacts		
<ul> <li>delayed switching</li> </ul>		2
<ul> <li>instantaneous contact</li> </ul>		0

Mounting type		screw and snap-on mounting onto 35 mm standard
		mounting rail
Width	mm	22.5
Height	mm	102
Depth	mm	91
Required spacing with side-by-side mounting		
• upwards	mm	0
• forwards	mm	0
• at the side	mm	0
Backwards	mm	0
• downwards	mm	0
Required spacing for grounded parts		
Backwards	mm	0
• at the side	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Required spacing for live parts		
• downwards	mm	0
Backwards	mm	0
• at the side	mm	0
• forwards	mm	0
• upwards	mm	0

Connections/ Terminals:	
Type of electrical connection for auxiliary and control	screw-type terminals
current circuit	
Type of connectable conductor cross-section	

• solid		1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
<ul> <li>finely stranded</li> </ul>		
— with core end processing		1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
<ul> <li>for AWG conductors</li> </ul>		
— stranded		2x (20 14)
— solid		2x (20 14)
Tightening torque	N∙m	0.8 1.2

General Prod	uct Approval		Declaration of Conformity	Test Certificates	Shipping Approval
	CSA CSA	EHC	EG-Konf.	Special Test Certificate	B U R E A U VERITAS
Shipping App	roval				other
<u>ĴÅ</u> dnv	GL				Confirmation
DNV	GL	PRS	RINA	RMRS	
other					
other	Environmental Confirmations				

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP15051RW30

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RP15051RW30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RP15051RW30&lang=en

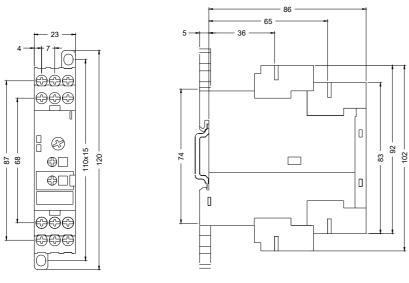

last modified:

23.02.2015