

Type: **P5-315/EA/SVB**


Article No.: **280950**



#### Ordering information

Design			Flush mounting
Description			Without auxiliary contacts
Main conducting paths No. of poles	M	3	
Auxiliary contacts	N/O	0	
Auxiliary contacts	B	0	
Max. three-phase motor rating (per set of 3 contacts) 50–60 Hz AC-3 400/415 V 50–60 Hz	P	kW	110
Rated uninterrupted current	$I_u$	A	315
Note for table header			According to IEC/EN 60204-1, VDE 0113 Part 1; with red rotary handle and yellow locking collar, lockable in 0 position

#### Contact sequence



#### General

Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL
-----------	--	--	---

			Switch-disconnectors to IEC/EN 60947-3
Lifespan, mechanical	Operations	$\times 10^6$	0,08
Maximum operating frequency	Operations/h		50
Climatic proofing			Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC 60068-2-30
Ambient temperature			
Open		°C	--25/50
Enclosed		°C	--25/40
Mounting position			As required
Documentation			Main catalogue HPL
<b>Contacts</b>			
Rated operational voltage	$U_e$	V AC	690
Rated impulse withstand voltage	$U_{imp}$	V AC	8000
Overvoltage category/pollution degree			III/3
Load-carrying capacity in intermittent operation, Class 12			
AB 25 % DF		$\times I_e$	2
AB 40 % DF		$\times I_e$	1,6
AB 60 % DF		$\times I_e$	1,3
Short-circuit rating			
Fuse		A gG/gL	250
Rated short-time withstand current (1 s current)	$I_{cw}$	A <sub>rms</sub>	4600
Switching angles		°	90
Current heat loss per contact at $I_e$		W	13
<b>Terminal capacities</b>			
Solid or stranded		mm <sup>2</sup>	1 × (16 – 185) 2 × (16 – 70)
Flexible with ferrule to DIN 46228		mm <sup>2</sup>	1 × (25 – 120) 2 × (25 – 50)
Terminal screw			Allen screw 6
Tightening torque		Nm	16
<b>Switching capacity</b>			
AC			
Rated making capacity cos φ = 0.35		A	1700
Rated breaking capacity, motor load switch cos φ = 0.35			
230 V		A	1600


400 V		A	1380
500 V		A	1250
690 V		A	400
Rated operational current 440 V load-break switch AC-21A	$I_e$	A	250
AC-3 motor load switch motor rating			
230 V	$P$	kW	37
400 V	$P$	kW	55
690 V	$P$	kW	45
AC-23A Motor load switches (main switches maintenance switches)			
230 V	$P$	kW	37
400 V	$P$	kW	90
690 V	$P$	kW	45
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	$I_e$	A	250
Voltage per contact pair in series		V	42
DC-23A, Motor load switches L/R = 15 ms			
24 V			
Rated operational current	$I_e$	A	250
Contacts		Quantity	3
48 V			
Rated operational current	$I_e$	A	250
Contacts		Quantity	3
60 V			
Rated operational current	$I_e$	A	250
Contacts		Quantity	3
120 V			
Rated operational current	$I_e$	A	80
Contacts		Quantity	3
<b>Notes</b>			
			Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft

The rated uninterrupted current  $I_u$  is stated at max. connected cross-section. For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.


## Dimensions

		Drilling dimensions 3 Padlocks
--	--	-----------------------------------

## Dimensions

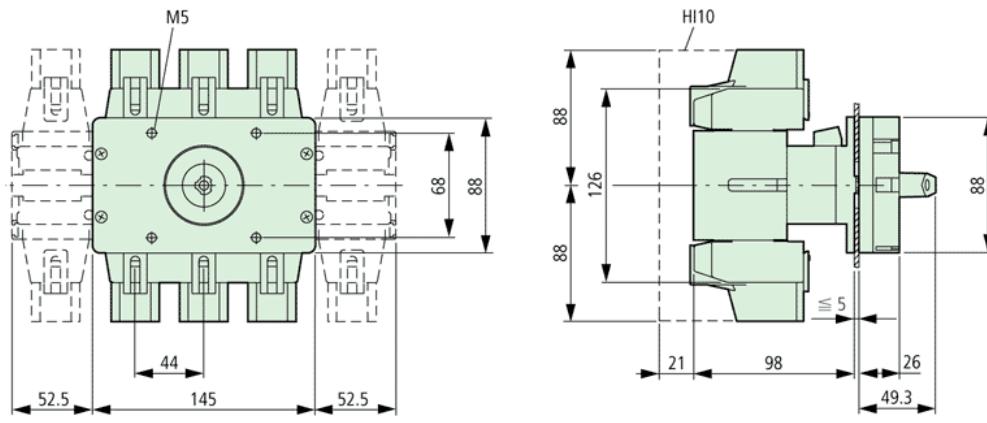

## Dimensions

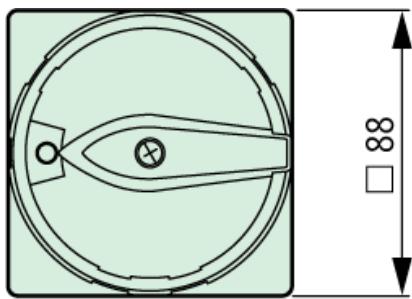

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn  
 E-Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net  
 Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3