



EMERG. STOP SWITCH 3-POLE IU=16,
P/AC-23A AT 400V=7.5KW 1 N-TERMINAL + 1 PE-
TERMINAL INSULATION-ENCLOSED,
IP65 ROTARY ACTUATOR RED/YELLOW (EMERG. STOP)

Similar to image

General technical details:

product brand name		SETRON
Product designation		Main and EMERGENCY-STOP switches
Design of the operating mechanism		rotary actuator, red/yellow
Type from device		fixed mounting
Protection class IP		IP65
Number of poles		3
Mounting type		floor mounting
• front mounting		No
• rail mounting		No
• series installation		No
Insulation voltage / rated value	V	690
Continuous current / rated value	A	16
Product equipment / interlock		Yes
Design of the electrical connection		
• for auxiliary contact		connection terminals
• for main current circuit		connection terminals
Type of the driving mechanism / motor drive		No
Number of NC contacts / for auxiliary contacts		0

Impulse voltage resistance / rated value	V	6,000
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Operating current / at AC-21 / rated value	A	16
Operating voltage		
• of the auxiliary contacts / for AC / maximum	V	500
• at 50/60 Hz / for AC / rated value	V	690
Service power / at AC-3		
• at 400 V / rated value	kW	5.5
• at 690 V / rated value	kW	5.5
Short-time current resistance (I_{cw}) / at 690 V / limited to 1 s / rated value	A	340
Depth	mm	117
Height	mm	152
Width	mm	100
Mechanical operating cycles as operating time / of the main contacts / typical		100,000
Active power loss / per conductor / typical	W	0.5
Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
Conductor cross section that can be connected		
• for main contacts		
• single- or multi-stranded	mm ²	1 ... 6
• stranded	mm ²	1 ... 6
• stranded wire / with conductor end processing / maximum	mm ²	4
• for auxiliary contacts		
• finely stranded		
• with conductor end processing	mm ²	0.75 ... 2.5
• single- or multi-stranded	mm ²	0.75 ... 4
• stranded	mm ²	0.75 ... 4
Type of the connectable conductor cross-section		
• for auxiliary contacts / solid		50
• for main contacts / finely stranded / with conductor end processing		4
• for auxiliary contacts		
• finely stranded / with conductor end processing		2x (0.75 ... 1.5 mm ²), 1x 2.5 mm ²
Ambient temperature / during operating	°C	-25 ... +55
Protection against electrical shock		finger-safe
Operating cycles / maximum	1/h	50
Acceptability for application		
• main switch		Yes

<ul style="list-style-type: none"> • switch disconnecter • maintenance/repair switch • safety cut-out switch • emergency stop switch 		Yes	
		Yes	
		Yes	
		Yes	
Product extension / optional			
<ul style="list-style-type: none"> • motor drive • voltage trigger 		No	
		No	
Mounting type			
<ul style="list-style-type: none"> • front mounting with central attachment • front mounting with 4-hole attachment 		Yes	
		No	
Operating frequency			
<ul style="list-style-type: none"> • initial value • final value 	Hz	50	
	Hz	60	
Design of the fuse link / for short-circuit protection of the main circuit / necessary			fuse gL/gG: 20 A
Service power / at AC-23 A			
<ul style="list-style-type: none"> • at 400 V / rated value • at 690 V / rated value 	kW	7.5	
	kW	7.5	
Insulation voltage / of the auxiliary switch / rated value	V	500	
Continuous current / of the auxiliary contact / rated value	A	10	
Item designation			
<ul style="list-style-type: none"> • according to DIN EN 61346-2 		S	

Certificates/approvals:

General Product Approval



CCC



CSA



GOST



UL

Test Certificates

[Special Test Certificate](#)

Shipping Approval



GL

other

[Declaration of Conformity](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3LD2064-0TB53>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3LD2064-0TB53/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD2064-0TB53

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

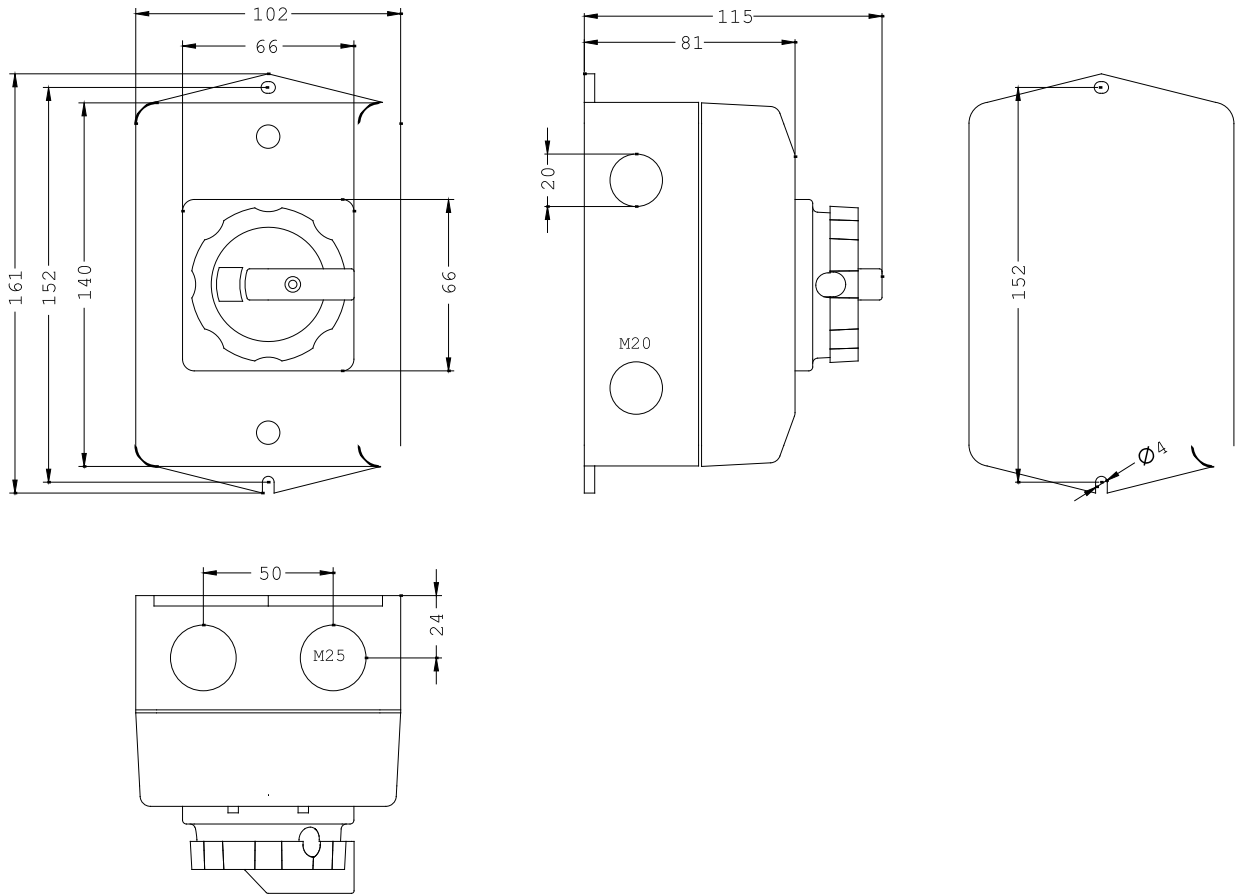

last change:

Jul 14, 2014