

## Inline terminal - IB IL AI 4/EF-PAC - 2878447

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Inline analog input terminal with differential input channels, complete with accessories (connector plug and labeling field), 4 inputs, 0 - 20 mA, 4 - 20 mA,  $\pm 20$  mA, 0 - 10 V,  $\pm 10$  V, 0 - 5 V,  $\pm 5$  V), 2-, 3- or 4-wire connection technology




### Why buy this product

- Short update time of 1 ms, maximum for all channels
- Sensor supply with channel-specific integrated short-circuit and overload protection
- Bus-synchronous provision of input values with very low jitter ( $< 10 \mu\text{s}$ )
- Measured value acquisition with 16-bit resolution
- 4 differential signal inputs
- Connection of sensors in 2, 3, and 4-wire technology
- Current ranges: 0 mA ... 20 mA, 4 mA ... 20 mA,  $\pm 20$  mA
- Voltage ranges: 0 V ... 10 V,  $\pm 10$  V, 0 V ... 5 V,  $\pm 5$  V
- Short-circuit
- Diagnostic and status indicators



### Key commercial data

Packing unit	1 pc
GTIN	 4 017918 996376
Weight per Piece (excluding packing)	232.0 g
Custom tariff number	85389091
Country of origin	Germany

### Technical data

#### Note:

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	48.8 mm
Height	136.8 mm
Depth	71.5 mm

# Inline terminal - IB IL AI 4/EF-PAC - 2878447

## Technical data

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

### General

Weight	210 g
Note on weight specifications	with male connectors
Mounting type	DIN rail
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logic), 24 V supply $U_{ANA}$ / I/O 500 V AC 50 Hz 1 min
	7.5 V supply (bus logic), 24 V supply $U_{ANA}$ /functional earth ground 500 V AC 50 Hz 1 min
	I/O / functional earth ground 500 V AC 50 Hz 1 min

### Interfaces

Name	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kBit/s
Transmission physics	Copper

### Inline potentials

Communications power $U_L$	7.5 V DC (via voltage jumper)
Current consumption from $U_L$	max. 100 mA
	typ. 85 mA
Current consumption from $U_M$	max. 200 mA
I/O supply voltage $U_{ANA}$	24 V DC
Current consumption from $U_{ANA}$	max. 20 mA
	typ. 13 mA

### Analog inputs

Number of inputs	max. 4 (Differential inputs, voltage or current can be chosen separately)
Connection method	Inline shield connector
	2, 3-conductor
Input name	Analog inputs
Data formats	IL, IB ST, standardized display, S7 compatible
Measured value resolution	16 bits (15 bits + sign bit)

# Inline terminal - IB IL AI 4/EF-PAC - 2878447

## Technical data

### Analog inputs

Current input signal	0 mA ... 20 mA
	4 mA ... 20 mA
	-20 mA ... 20 mA
Voltage input signal	0 V ... 5 V
	-5 V ... 5 V
	0 V ... 10 V
	-10 V ... 10 V
Number of inputs	4 (differential inputs, voltage)
Voltage input signal	0 V ... 5 V
	-5 V ... 5 V
	0 V ... 10 V
	-10 V ... 10 V
Input resistance of voltage input	300 kΩ
Number of inputs	4 (differential inputs, current)
Current input signal	0 mA ... 20 mA
	4 mA ... 20 mA
	-20 mA ... 20 mA
Input resistance current input	approx. 110 Ω

## Classifications

### eCl@ss

eCl@ss 4.0	27250303
eCl@ss 4.1	27250303
eCl@ss 5.0	27250303
eCl@ss 5.1	27242601
eCl@ss 6.0	27242601
eCl@ss 7.0	27242601
eCl@ss 8.0	27242601

### ETIM

ETIM 2.0	EC001431
ETIM 3.0	EC001596
ETIM 4.0	EC001596
ETIM 5.0	EC001596

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404

# Inline terminal - IB IL AI 4/EF-PAC - 2878447

## Classifications

### UNSPSC

UNSPSC 13.2	43201404
-------------	----------

## Approvals

### Approvals

#### Approvals


UL Recognized / cUL Recognized / LR / GL / BV / DNV / ABS / GL-SW / BSH / cULus Recognized / GL


#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

#### Approvals submitted

## Approval details

UL Recognized 

cUL Recognized 

LR

GL

BV

DNV

ABS

GL-SW

BSH

## Inline terminal - IB IL AI 4/EF-PAC - 2878447

### Approvals

cULus Recognized 

GL

### Accessories

#### Accessories

#### Device parameterization

Software - AX+ BASIC - 2985068



Software CD for FDT container for integrating device DTMs (free download)

Software - AX DTM LIB - 2988065



DTM library

### Labeling panel

Labeling field - IB IL FIELD 8 - 2727515

Labeling field, width: 48.8 mm



Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



### Plug

# Inline terminal - IB IL AI 4/EF-PAC - 2878447

## Accessories

Inline shield connector - IB IL SCN-6 SHIELD - 2726353



Inline shield connector

---

## Terminal marking

Insert strip - ESL 62X46 - 0809502

Insert strip, Sheet, white, Unlabeled, Can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 46 mm



Insert strip - ESL 62X10 - 0809492


Insert strip, Sheet, white, Unlabeled, Can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 10 mm



---

## Drawings

Connection diagram

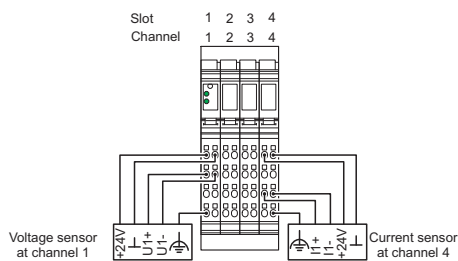

Dimensioned drawing

