



Main

| | |
|---------------------------|---|
| Commercial Status | Commercialised |
| Range of product | Harmony XVR |
| Product or component type | Prewired rotating mirror beacon |
| Sound signalling | Without |
| Device short name | XVR |
| Mounting diameter | 130 mm |
| IP degree of protection | IP66 (resistant to vibration) conforming to IEC 60529 |
| [Us] rated supply voltage | 12 V DC |
| Light source | High luminosity LED, red |

Complementary

| | |
|--|---|
| Material | PC (globe) ABS (acrylonitrile butadiene-styrene) (body part) |
| CAD overall width | 130 mm |
| CAD overall depth | 130 mm |
| Product weight | 0.8 kg |
| Marking | CE |
| Product mounting | By 3 M8 screws |
| Supply voltage limits | 10...15 V DC |
| [Uimp] rated impulse withstand voltage | 0.8 kV |
| Current consumption | 250 mA |
| Flashing frequency | 2.7 Hz |
| Clamping connection capacity | 1.25 mm ² |
| AWG gauge | 18 |
| Cable length | 400 mm |

Environment

| | |
|--|----------------------------------|
| Standards | EN 61000-6-2 EN 61000-6-4 |
| Protective treatment | TC |
| Ambient air temperature for storage | -35...70 °C |
| Ambient air temperature for operation | -30...50 °C |
| Class of protection against electric shock | Class II conforming to IEC 61140 |


Offer Sustainability

| | |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product |
| RoHS | Compliant - since 0808 - Schneider Electric declaration of conformity |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Rotating Mirror Beacon

Dimensions

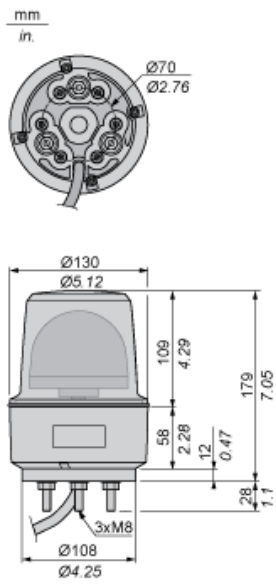

Rotating Mirror Beacon

Panel Cut-out

