



### Main

|                               |  |
|-------------------------------|--|
| Range of product              | Harmony XVB Universal  |
| Product or component type     | Complete beacon  |
| Beacon/Indicator bk unit type | Illuminated unit<br>Base unit with direct or tube fixing mode              |
| Signalling type               | Steady   |
| Mounting diameter             | 70 mm  |
| Component name                | XVBL   |
| Material                      | Polycarbonate (illuminated unit)<br>Glass reinforced polyamide (base unit) |
| Light source                  | Yellow bulb not included   |
| Bulb type                     | Protected LED<br>Incandescent with BA 15d                                  |
| [Us] rated supply voltage     | <= 250 V   |
| Power dissipation in W        | <= 7 W   |

### Complementary

|  |   |
|--|---|
| Connections - terminals                | Screw clamp terminals, connection capacity: <= 1 x 1.5 mm <sup>2</sup> with cable end |
| [Ui] rated insulation voltage          | 250 V conforming to IEC 60947-1   |
| Nominal voltage limit                  | 0.85...1.1 Un conforming to IEC 60947-5-1   |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1  |
| CAD overall width                      | 70 mm   |
| CAD overall height                     | 139 mm  |
| CAD overall depth                      | 70 mm   |
| Terminals description ISO n°1          | (COM-1)PW<br>(GND)GROUND  |
| Product weight                         | 0.26 kg   |

### Environment

|  |  |
|--|--|
| Pollution degree                           | 2  |
| Product certifications                     | CCC<br>CSA C22-2 No 14<br>GOST<br>UL 508   |
| Standards                                  | EN/IEC 60947-5-1   |
| Protective treatment                       | TC   |
| Ambient air temperature for operation      | -25...70 °C incandescent<br>-25...50 °C LED  |
| Ambient air temperature for storage        | -40...70 °C  |
| Class of protection against electric shock | Class II (on base unit) conforming to IEC 61140<br>Class I (on support tube) conforming to IEC 61140 |
| IP degree of protection                    | IP66 (on base unit) conforming to IEC 60529<br>IP65 (on fixing base XVBZ0.) conforming to IEC 60529  |
| NEMA degree of protection                  | NEMA 4X (indoor) conforming to UL 508  |


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

---

Illuminated Beacon for BA 15d Bulb or LED

---

Dimensions

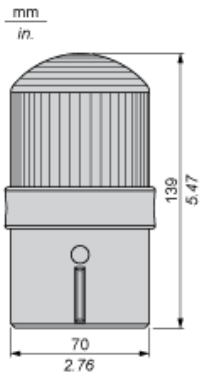

---

Illuminated Beacon

---

Wiring Diagram

