

Super-slim 25mm Signal Tower with aluminum body, ideal for small devices.


FEATURES


- PATLITE's exclusive hybrid prism-cut lens designed for enhanced visibility from any direction and distance.
- · Lens is made of superior impact and heat resistant polycarbonate resin for superior durability and light transmission.
- Available Colors are in Red, Amber, Green, Blue, and Clear/White.
- Specially enhanced high intensity illumination design.
- · Direct mount installation with just a single hole.
- Interchangeable Modules need no re-wiring, even after installation.
- · Main body is constructed of corrosion resistant anodized aluminum to retain its external beauty.
- Body Length for MES-A is 40mm, and for the ME-A is 200mm.
- · Conforms to the CE requirements.
- · UL recognized components (File No. E215660)


AVAILABLE BY SPECIAL ORDER

- Cable: Versatile and flexible 3m cable.
- · IP54 (for ME/MES).
- PNP Compatible: ME and MES 24V Types.


How to Order








Dimensions

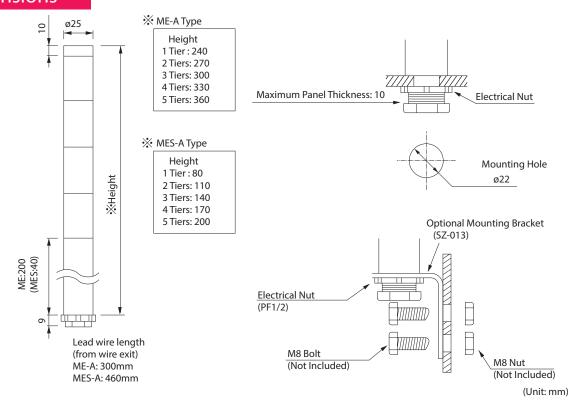


Wiring

• ME-A/MES-A Contact/ Switch



• ME-A/MES-A NPN Open Collector

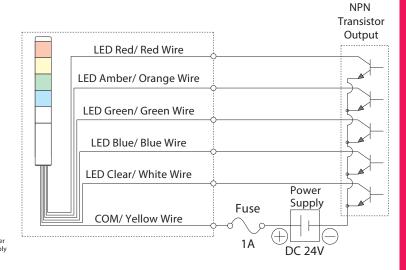

Specifications

Stack Number	Model	Rated Voltage	Power Consumption	Mass	
				ME	MES
1 Tier	ME/MES-102A-R	DC 24V	0.6W	220g	120g
	ME/MES-102A-Y		0.6W		
	ME/MES-102A-G		0.5W		
	ME/MES-102A-B		0.5W		
	ME/MES-102A-C		0.5W		
2 Tiers	ME/MES-202A-RY		1.2W	230g	130g
	ME/MES-202A-RG		1.1W		
	ME/MES-202A-RB		1.1W		
	ME/MES-202A-RC		1.1W		
3 Tiers	ME/MES-302A-RYG		1.7W	240g	140g
	ME/MES-302A-RYB		1.7W		
	ME/MES-302A-RYC		1.7W		
4 Tiers	ME/MES-402A-RYGB		2.3W	250g	150g
	ME/MES-402A-RYGC		2.3W		
5 Tiers	ME/MES-502A-RYGBC		2.8W	260g	160g