

Inline function terminal - IB IL TEMP 4/8 RTD-PAC - 2863915

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline analog input terminal, complete with accessories (connector and labeling field), 8 channels, RTD (resistance temperature detector), 2, 3-wire connection method

Product Description

This terminal block provides you with an inexpensive 8-channel input module for resistive temperature sensors.

The module supports platinum and nickel sensors in acc. with DIN and SAMA directives. With the platinum sensors, not only Pt 100, Pt 500 and Pt 1000 are supported, but also the Pt 10000 (e.g. from building automation) and numerous other measuring sensors. The sensors are connected using the 2 or 3-wire system.

The measured temperature is displayed via 16-bit values per channel (2 x 4 channels in process data multiplex) or via 16 bits per channel with PCP communication.

Software library CD "CD AS SW LIB" contains function blocks and sample programs for analog value processing.

The Inline terminal can be identified using hinged labeling fields. The fields have insert cards that can be labeled individually to suit the application. Zack marker strip ZBF 6... or Zack marker sheet ZBFM 6... can also be used for labeling the terminal points.

Product Features

- Pt, Ni, Cu, KTY sensor types according to DIN and SAMA
- 8 inputs for resistive temperature sensors and linear resistors up to 20 k Ω
- Connection of sensors in 2 and 3-wire technology
- Communication either via process data or parameter channel (PCP)
- Channels are configured independently of one another using the bus system
- Robust inputs ideal for use in harsh industrial environments with electromagnetic interference
- Measured values can be represented in three different formats
- Temperature and resistance measurement in the millisecond range
- Diagnostic and status indicators



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	256.9 g
Custom tariff number	85389091
Country of origin	Germany

Inline function terminal - IB IL TEMP 4/8 RTD-PAC - 2863915

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	48.8 mm
Height	136.8 mm
Depth	71.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

General

Net weight	190 g
Mounting type	DIN rail
Operating mode	Process data mode with 5 words/1 word PCP
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Test section	7.5 V supply (bus logic)/±15.5 V, ±5 V analog supply (analog I/O) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min
	±15.5 V, ±5 V analog supply (analog I/O)/functional earth ground 500 V AC 50 Hz 1 min

Interfaces

Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kBit/s
Transmission physics	Copper

Inline potentials

Communications power U_L	7.5 V DC (via voltage jumper)
Current consumption from U_L	typ. 75 mA
I/O supply voltage U_{ANA}	24 V DC
Current consumption from U_{ANA}	typ. 28 mA
Power consumption	typ. 1.24 W

Inline function terminal - IB IL TEMP 4/8 RTD-PAC - 2863915

Technical data

Analog inputs

Number of inputs	8
Input name	Analog RTD inputs
Description of the input	Input for resistive temperature sensors
Connection method	Spring-cage connection
	2, 3-conductor
Sensor types (RTD) that can be used	Pt, Ni, KTY, Cu sensors, linear resistors
Linear resistance measuring range	0 Ω ... 400 Ω
	0 Ω ... 20 kΩ
Measuring principle	Successive approximation
Measured value representation	16 bits (15 bits + sign bit)
A/D conversion time	max. 10 μs
Process data update	6 ms (Up to 230 ms possible depending on operating mode)
Data formats	IB IL, IB ST, S7 compatible
Precision	typ. 0.06 %

Classifications

eCl@ss

eCl@ss 4.0	27250303
eCl@ss 4.1	27250303
eCl@ss 5.0	27250303
eCl@ss 5.1	27242601
eCl@ss 6.0	27242601
eCl@ss 7.0	27242601
eCl@ss 8.0	27242601

ETIM

ETIM 2.0	EC001431
ETIM 3.0	EC001596
ETIM 4.0	EC001596
ETIM 5.0	EC001596

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Inline function terminal - IB IL TEMP 4/8 RTD-PAC - 2863915

Approvals

Approvals

Approvals

UL Listed / cUL Listed / LR / GL / BV / DNV / ABS / RINA / GL-SW / BSH / BSH / BV / DNV / ABS / RINA / GL-SW / EAC / GL / cULus Listed

Ex Approvals

Approvals submitted

Approval details

UL Listed 

cUL Listed 

LR

GL

BV

DNV

ABS


RINA

GL-SW

BSH


Inline function terminal - IB IL TEMP 4/8 RTD-PAC - 2863915

Approvals

BSH
BV
DNV
ABS
RINA
GL-SW
EAC
GL
cULus Listed 

Drawings

Connection diagram

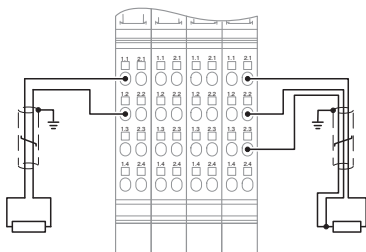

Dimensional drawing

