
RS stock numbers: 756-4227, 756-4236, 756-4239, 756-4233,

756-4242, 756-4245, 756-4249, 756-4258, 756-4251

RSF66P Series

Dual switch point series with M12 connection





- PPS material
- Versions for Filling or Emptying Control
- M12 4 pin connection for quick connection to circuit

Technical Specification (Common to both Single and Double Float versions)

WRAS and NSF Approved

Mechanical Electrical PPS 25 Material Switching power VA max. Switching Voltage AC max 240 Colour Grey -10/+85 °C Switching Voltage DC max 120 Temp. Range +14/+185 Switching Current max A 0.6 Minimum Liquid SG 0.85 All electrical ratings are for resistive loads only.

RS Stock No.	Standard Parts Single Float Versions		Upper switch Level	Lower switch Level	Total length
756-4227	RSF66A25B75P		30mm	75mm	102mm
756-4236	RSF66A25B100P		30mm	100mm	127mm
756-4239	RSF66A25B125P		30mm	125mm	152mm
756-4233	RSF66A25B150P		30mm	150mm	177mm
756-4242	RSF66A25B175P		30mm	175mm	202mm
Dual Float Versions					
756-4245	RSF66A50A100P	Emptying Control Emptying Control	50mm	100mm	134mm
756-4249	RSF66A50A150P		50mm	150mm	184mm

756-4258 RSF66B50B100P 127mm Filling Control 50mm 100mm 756-4251 RSF66B50B150P 177mm Filling Control 50mm 150mm

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

The RSF66P float switch series is designed to offer a number of switching options to meet a variety of system requirements.

These are manufactured in PPS (Polyphenylene Sulphide), which is compatible with a wide range of liquids.


The single float types are generally used in systems with PLC control of processes.

The dual float versions can be used for controlling the filling or emptying of tanks via electromechanical relays.

> Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

Mechanical Dimensions

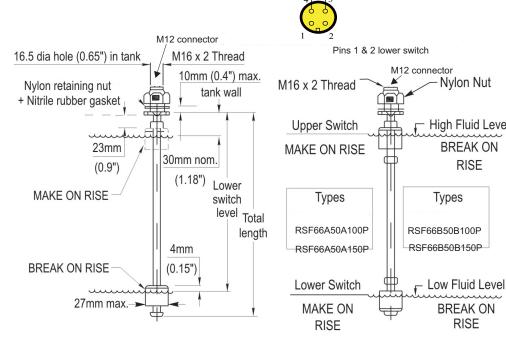



www.cynergy3.com

Pins 3 & 4 upper switch

Nylon Nut

High Fluid Level

BREAK ON

RISE

BREAK ON

RISE

Types

ISO9001CERTIFIED

RSF66P RS 2017