

## SSF212 Series Compact external fitting via ½" NPT thread





The SSF212 series are horizontally mounted switches that are fitted via a ½"NPT thread from the outside of the tank, so does not require access to the inside of the tank.

These are manufactured in SS 304 & 316 and will work in liquids of SG 0.8 minimum.

The switch action may be reversed by mounting the device with the orientation arrow pointing downwards, instead of the normal upwards direction.

These are available with either 100cm flying lead, DIN 43650 plug & socket or M12 round connection.

Cable sets are available for use with M12 connection versions.

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE *Telephone +44 (0) 1202 897969* 

Email:sales@cynergy3.com

## IS09001 CERTIFIED


SSF212 RS 2017

- External fitting via 1/2"NPT thread
- SS 316 float
- Compact switch design
- High Temperature version available (180°C)
- User configurable N/O (make on rise) or N/C (make on fall)

Technical Specification					
Mounting style	External		Cable length - st	andard 100cm or plug	
Mounting thread	1/2"NPT		Cable size	17/0.10 - AWG22	
Float & Stem material	316 & 304 grade	SS	Cable conductor	material Tinned copper	
Maximum Temperature	120°C (H version	180°C)	Cable sheath ma	terial XLPE	
Maximum pressure	5 bar		Cable temperatu	re rating 125℃	
Float SG	0.7		Sealing gasket	Not supplied	
Minimum fluid SG	0.8		Tightening torque	e for fixing nut 2.0kg/cm	
<b>Electrical Specification</b>					
Contact Form		N/O (N/C)			
Switching Power Max	VA	50			
Switching Voltage AC Max	V	300 (SSF212XPM	12 = 240Vac)		
Switching Voltage DC Max	V	300 (SSF212XPM	12 = 200 V dc)		
Switching Current Max	A	0.5			
All ratings are for resistive load only.					
RS Stock Code	Standard Parts	Float Material	Stem Material	Connection	
431-8406	SSF212X100	SS 316	SS 304	100cm XLPE 17/0.1	
756-4292	SSF212X100H	SS 316	SS 304	100cm XLPE 17/0.1	
454-9105	SSF212XPL	SS 316	SS 304	Plug & Socket	
756-4135	SSF212XPM12	SS316	SS 304	M12 socket	
Custom versions can be made for	Custom versions can be made for particular applications. Please contact Cypergy3 with your requirements				

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

## Mechanical Dimensions

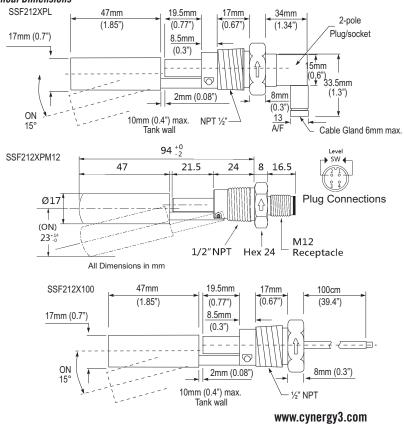

© 2017 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.