

Soft-start and quick exhaust valves MS-SV, MS series

FESTO



Festo core product range
Covers 80% of your automation tasks

Worldwide:

Always in stock

Superb:


Festo quality at an attractive price

Easy:

Reduces procurement and storing complexity

★ Ready for dispatch from the Festo factory in 24 hours
Held in stock in 13 service centres worldwide
More than 2200 products








★ Ready for dispatch in 5 days maximum from stock
Assembled for you in 4 service centres worldwide
Up to 6×10^{12} variants per product series



Soft-start and quick exhaust valves MS-SV, MS series

FESTO

Product range overview – MS series service units

| Type | Size | Pneumatic connection in housing | Connecting plate | Pressure regulation range [bar] | | | | | | Grade of filtration [µm] | | | |
|---|------|---------------------------------|--------------------------------|---------------------------------|-------------|------------|------------|------------|------------|--------------------------|---|---|----|
| | | | | 0.05 ... | 0.05 ... | 0.1 ... | 0.3 ... | 0.1 ... | 0.5 ... | 0.01 | 1 | 5 | 40 |
| Code | | | AG.../AQ... | D2 | D4 | D5 | D6 | D7 | D8 | A | B | C | E |
| Service unit combinations | | | | | | | | | | | | | |
| MSB-FRC  | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | ■ | ■ | - | - | - | ■ | ■ |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | ■ | ■ | - | - | - | ■ | ■ |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Service unit combinations (further variants can be ordered using the configurator → Internet: msb4, msb6 or msb9) | | | | | | | | | | | | | |
| MSB  | 4 | G1/4 | G1/8, G1/4, G3/8 | - | - | - | ■ | ■ | - | - | - | ■ | ■ |
| | 6 | G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | ■ | ■ | - | - | - | ■ | ■ |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Individual devices | | | | | | | | | | | | | |
| Filter regulators MS-LFR  | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | ■ | ■ | ■ | - | - | - | ■ | ■ |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | ■ | ■ | ■ | ■ | - | - | ■ | ■ |
| | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | ■ | ■ | ■ | ■ | - | - | ■ | ■ |
| | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | ■ | ■ | ■ | - | - | ■ | ■ |
| Filters MS-LF  | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | - | - | ■ | ■ |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | ■ | ■ |
| | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | - | - | ■ | ■ |
| | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | ■ | ■ |
| Fine and micro filters MS-LFM  | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | ■ | ■ | - | - | - |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | ■ | ■ | - | - | - |
| | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | ■ | ■ | - | - | - |
| | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | ■ | ■ | - | - | - |
| Activated carbon filters MS-LFX  | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | - | - | - | - |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | - | - |
| | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | - | - |
| Water separators MS-LWS  | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | - | - |
| | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | - | - |

Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

| Type | Size | Bowl guard | | Condensate drains | | | | Pressure indicator | | | | Security | | Options | | → Page/ Internet | |
|------------------------------------|------|--------------------------------------|------------|-------------------|----------------|-----------------|---------------------------------------|--------------------------------------|------------------------------|--|--|-----------------|---|----------------------------------|----------|---------------------|-----------------------------------|
| | | Plastic bowl with plastic bowl guard | Metal bowl | Manual rotary | Semi-automatic | Fully automatic | External, fully automatic, electrical | Cover plate (without pressure gauge) | Integrated MS pressure gauge | Adapter plate for EN pressure gauge G1/8 | Adapter plate for EN pressure gauge G1/4 | Pressure sensor | Rotary knob with detent, lockable via accessories | Rotary knob with integrated lock | Silencer | | Flow direction from right to left |
| Code | | R | U | M | H | V | E... | VS | AG | A8 | A4 | AD... | AS | E11 | S | Z | |
| Service unit combinations | | | | | | | | | | | | | | | | | |
| MSB-FRC | 4 | ■ | - | ■ | - | ■ | - | - | ■ | - | - | - | ■ | - | - | ■ | msb4 |
| | 6 | ■ | ■ | ■ | - | ■ | - | - | ■ | - | - | - | ■ | - | - | ■ | msb6 |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Service unit combinations | | | | | | | | | | | | | | | | | |
| MSB | 4 | ■ | ■ | ■ | - | ■ | - | - | ■ | - | - | - | ■ | - | - | ■ | msb4 |
| | 6 | ■ | ■ | ■ | - | ■ | - | - | ■ | - | - | - | ■ | - | - | ■ | msb6 |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Individual devices | | | | | | | | | | | | | | | | | |
| Filter regulators MS-LFR | 4 | ■ | ■ | ■ | ■ | ■ | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms4-lfr |
| | 6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms6-lfr |
| | 9 | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms9-lfr |
| | 12 | - | ■ | ■ | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms12-lfr |
| Filters MS-LF | 4 | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | - | ■ | ms4-lf |
| | 6 | ■ | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms6-lf |
| | 9 | - | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms9-lf |
| | 12 | - | ■ | ■ | - | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms12-lf |
| Fine and micro filters MS-LFM | 4 | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | - | ■ | ms4-lfm |
| | 6 | ■ | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms6-lfm |
| | 9 | - | ■ | ■ | ■ | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms9-lfm |
| | 12 | - | ■ | ■ | - | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms12-lfm |
| Activated carbon filters MS-LFX | 4 | ■ | ■ | - | - | - | - | - | - | - | - | - | - | - | - | ■ | ms4-lfx |
| | 6 | ■ | ■ | - | - | - | - | - | - | - | - | - | - | - | - | ■ | ms6-lfx |
| | 9 | - | ■ | - | - | - | - | - | - | - | - | - | - | - | - | ■ | ms9-lfx |
| | 12 | - | ■ | - | - | - | - | - | - | - | - | - | - | - | - | ■ | ms12-lfx |
| Water separators MS-LWS | 4 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | ■ | - | - | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms6-lws |
| | 9 | - | ■ | - | - | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms9-lws |
| | 12 | - | ■ | - | - | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms12-lws |

Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units



| Type | Size | Pneumatic connection in housing | Connecting plate | Pressure regulation range [bar] | | | | | | Supply voltage | | | |
|---|------|---------------------------------|------------------|---------------------------------|--------------------|-----------------|-----------------|------------------|------------------|--|--|---|---|
| | | | | 0.05 ... 0.7 | 0.05 ... 2.5 | 0.1 ... 4 | 0.3 ... 7 | 0.1 ... 12 | 0.5 ... 16 | 24 V DC, connection pattern to EN 175301 | 24 V DC, connection M12 to IEC 61076-2-101 | 110 V AC, connection pattern to EN 175301 | 230 V AC, connection pattern to EN 175301 |
| Code | | | AG.../AQ... | D2 | D4 | D5 | D6 | D7 | D8 | V24 | V24P | V110 | V230 |
| Individual devices | | | | | | | | | | | | | |
| Pressure regulators MS-LR | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | ■ | ■ | ■ | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | ■ | ■ | ■ | ■ | - | - | - |
| | | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | ■ | ■ | ■ | ■ | - | - | - |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | ■ | ■ | ■ | - | - | - |
| Pressure regulators MS-LRB | | 4 | G1/4 | G1/8, G1/4, G3/8 | - | - | ■ | ■ | ■ | - | - | - | - |
| | | 6 | G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | ■ | ■ | ■ | ■ | - | - | - |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | - | - | - | - | - | - | - | - | - | - |
| Precision pressure regulators MS-LRP | | 4 | - | - | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | ■ | ■ | ■ | - | ■ | - | - | - | - |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | - | - | - | - | - | - | - | - | - | - |
| Precision pressure regulators MS-LRPB | | 4 | - | - | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/2 | G1/4, G3/8, G1/2, G3/4 | ■ | ■ | ■ | - | ■ | - | - | - | - |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | - | - | - | - | - | - | - | - | - | - |
| Electrical pressure regulators MS-LRE | | 4 | - | - | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | ■ | ■ | ■ | ■ | - | - | - |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | - | - | - | - | - | - | - | - | - | - |
| Lubricators MS-LOE | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | - |
| | | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | - | - | - |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | - |
| On-off valves, manually actuated MS-EM(1) | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | - |
| | | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | - | - | - |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | - |
| On-off valves, electrically actuated MS-EE | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | ■ | - | ■ |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | ■ | - | ■ |
| | | 9 | G3/4, G1 | G1/2, G3/4, G1, G1 1/4, G1 1/2 | - | - | - | - | - | - | ■ | ■ | ■ |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | ■ | ■ | ■ |
| Soft-start valves, pneumatically actuated MS-DL | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | - | - | - |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | - | - | - |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | - | - | - |
| Soft-start valves, electrically actuated MS-DE | | 4 | G1/8, G1/4 | G1/8, G1/4, G3/8 | - | - | - | - | - | - | ■ | - | ■ |
| | | 6 | G1/4, G3/8, G1/2 | G1/4, G3/8, G1/2, G3/4 | - | - | - | - | - | - | ■ | - | ■ |
| | | 9 | - | - | - | - | - | - | - | - | - | - | - |
| | | 12 | - | G1, G1 1/4, G1 1/2, G2 | - | - | - | - | - | - | ■ | ■ | ■ |

Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

| Type | Size | Bowl guard | | Pressure indicator | | | | Security | | | Options | | → Page/ Internet |
|---|------|--------------------------------------|------------|--------------------------------------|------------------------------|--|--|-----------------|---|----------------------------------|----------|-----------------------------------|---------------------|
| | | Plastic bowl with plastic bowl guard | Metal bowl | Cover plate (without pressure gauge) | Integrated MS pressure gauge | Adapter plate for EN pressure gauge G1/8 | Adapter plate for EN pressure gauge G1/4 | Pressure sensor | Rotary knob with detent, lockable via accessories | Rotary knob with integrated lock | Silencer | Flow direction from right to left | |
| Code | | R | U | VS | AG | A8 | A4 | AD... | AS | E11 | S | Z | |
| Individual devices | | | | | | | | | | | | | |
| Pressure regulators MS-LR | 4 | - | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms4-lr |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | ■ | ■ | - | ■ | ms6-lr |
| | 9 | - | - | ■ | ■ | - | ■ | ■ | ■ | ■ | - | ■ | ms9-lr |
| | 12 | - | - | ■ | ■ | - | ■ | - | ■ | ■ | - | ■ | ms12-lr |
| Pressure regulators MS-LRB | 4 | - | - | ■ | ■ | ■ | ■ | ■ | ■ | ■ | - | ■ | ms4-lrb |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | ■ | ■ | - | ■ | ms6-lrb |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Precision pressure regulators MS-LRP | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | - | ■ | ■ | ■ | ■ | ■ | - | ■ | ms6-lrp |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Precision pressure regulators MS-LRPB | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | - | ■ | ■ | ■ | ■ | ■ | - | ■ | ms6-lrpb |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Electrical pressure regulators MS-LRE | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | ■ | - | ■ | - | - | - | - | ■ | ms6-lre |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Lubricators MS-LOE | 4 | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms4-loe |
| | 6 | ■ | ■ | - | - | - | - | - | - | - | - | ■ | ms6-loe |
| | 9 | - | ■ | - | - | - | - | - | - | - | - | ■ | ms9-loe |
| | 12 | - | ■ | - | - | - | - | - | - | - | - | ■ | ms12-loe |
| On-off valves, manually actuated MS-EM(1) | 4 | - | - | ■ | ■ | ■ | ■ | ■ | - | - | ■ | ■ | ms4-em1 |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | ms6-em1 |
| | 9 | - | - | ■ | ■ | - | ■ | - | - | - | ■ | ■ | ms9-em |
| | 12 | - | - | ■ | ■ | - | ■ | - | - | - | ■ | ■ | ms12-em |
| On-off valves, electrically actuated MS-EE | 4 | - | - | ■ | ■ | ■ | ■ | ■ | - | - | ■ | ■ | ms4-ee |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | ms6-ee |
| | 9 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | ms9-ee |
| | 12 | - | - | ■ | ■ | - | ■ | - | - | - | ■ | ■ | ms12-ee |
| Soft-start valves, pneumatically actuated MS-DL | 4 | - | - | ■ | ■ | ■ | ■ | ■ | - | - | - | ■ | ms4-dl |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | - | ■ | ms6-dl |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | ■ | ■ | - | ■ | - | - | - | - | ■ | ms12-dl |
| Soft-start valves, electrically actuated MS-DE | 4 | - | - | ■ | ■ | ■ | ■ | ■ | - | - | - | ■ | ms4-de |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | - | ■ | ms6-de |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | ■ | ■ | - | ■ | - | - | - | - | ■ | ms12-de |

Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

| Type | Size | Pneumatic connection in housing | Connecting plate | Performance Level | | | Supply voltage | | | | | |
|---|------|---------------------------------|---|---|-----------------------|--|-----------------------|--|--|---|---|---|
| | | | | Category 1, 1-channel | Category 3, 2-channel | Category 4, 2-channel with self-monitoring | 24 V DC, Sub-D, 9-pin | 24 V DC, connection pattern to EN 175301 | 24 V DC, connection M12 to IEC 61076-2-101 | 110/230 V AC, connection pattern to EN 175301 | 22 ... 31.6 V DC, connection M12, AS-i Safety at Work | |
| Code | | | AG.../AQ... | C | D | E | 10V24 | 10V24/V24 | 10V24P | V110/V230 | ASIS | |
| Individual devices | | | | | | | | | | | | |
| Soft start and exhaust valves MS-SV-C | | 4 | – | | | | | | | | | |
| | | 6 | G $\frac{1}{2}$ | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$ | ■ | – | – | – | ■ | ■ | – | – |
| | | 9 | G $\frac{3}{4}$, G1 | G $\frac{1}{2}$, G $\frac{3}{4}$, G1, G1 $\frac{1}{4}$, G1 $\frac{1}{2}$ | ■ | – | – | – | ■ | ■ | ■ | – |
| | | 12 | – | | | | | | | | | |
| Soft start and exhaust valves MS-SV-D | | 4 | – | | | | | | | | | |
| | | 6 | G $\frac{1}{2}$ | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$ | – | ■ | – | – | ■ | ■ | – | – |
| | | 9 | – | | | | | | | | | |
| | | 12 | – | | | | | | | | | |
| Soft start and exhaust valves MS-SV-E | | 4 | – | | | | | | | | | |
| | | 6 | G $\frac{1}{2}$ | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$ | – | – | ■ | ■ | – | – | – | ■ |
| | | 9 | – | | | | | | | | | |
| | | 12 | – | | | | | | | | | |
| Membrane air dryers MS-LDM1 | | 4 | G $\frac{1}{8}$, G $\frac{1}{4}$ | G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$ | – | – | – | – | – | – | – | – |
| | | 6 | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$ | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$ | – | – | – | – | – | – | – | – |
| | | 9 | – | | | | | | | | | |
| | | 12 | – | | | | | | | | | |
| Branching modules MS-FRM | | 4 | G $\frac{1}{8}$, G $\frac{1}{4}$ | G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$ | – | – | – | – | – | – | – | – |
| | | 6 | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$ | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$ | – | – | – | – | – | – | – | – |
| | | 9 | G $\frac{3}{4}$, G1 | G $\frac{1}{2}$, G $\frac{3}{4}$, G1, G1 $\frac{1}{4}$, G1 $\frac{1}{2}$ | – | – | – | – | – | – | – | – |
| | | 12 | – | G1, G1 $\frac{1}{4}$, G1 $\frac{1}{2}$, G2 | – | – | – | – | – | – | – | – |
| Distributor blocks MS-FRM-FRZ | | 4 | G $\frac{1}{4}$ | – | – | – | – | – | – | – | – | – |
| | | 6 | G $\frac{1}{2}$ | – | – | – | – | – | – | – | – | – |
| | | 9 | – | | | | | | | | | |
| | | 12 | – | | | | | | | | | |
| Flow sensors SFAM | | 4 | – | | | | | | | | | |
| | | 6 | G $\frac{1}{2}$ | G $\frac{1}{2}$ | – | – | – | – | – | – | – | – |
| | | 9 | – | G1, G1 $\frac{1}{2}$ | – | – | – | – | – | – | – | – |
| | | 12 | – | | | | | | | | | |

Soft-start and quick exhaust valves MS-SV, MS series

Product range overview – MS series service units

| Type | Size | Bowl guard | | Pressure indicator | | | | | Switch output | | Options | | → Page/ Internet |
|---|------|--------------------------------------|------------|--------------------------------------|------------------------------|---|---|-----------------|---|--|----------|-----------------------------------|---------------------|
| | | Plastic bowl with plastic bowl guard | Metal bowl | Cover plate (without pressure gauge) | Integrated MS pressure gauge | Adapter plate for EN pressure gauge G ¹ / ₈ | Adapter plate for EN pressure gauge G ¹ / ₄ | Pressure sensor | 2x PNP or NPN, 1 analogue output 4 ... 20 mA | 2x PNP or NPN, 1 analogue output 0 ... 10 V | Silencer | Flow direction from right to left | |
| Code | | R | U | VS | AG | A8 | A4 | AD... | 2SA | 2SV | S | Z/R | |
| Individual devices | | | | | | | | | | | | | |
| Soft start and exhaust valves MS-SV-C | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | 8 |
| | 9 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | 46 |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Soft start and exhaust valves MS-SV-D | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | 18 |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| Soft start and exhaust valves MS-SV-E | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | ■ | ■ | 32 |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| Membrane air dryers MS-LDM1 | 4 | - | ■ | - | - | - | - | - | - | - | - | ■ | ms4-ldm1 |
| | 6 | - | ■ | - | - | - | - | - | - | - | - | ■ | ms6-ldm1 |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Branching modules MS-FRM | 4 | - | - | ■ | ■ | ■ | ■ | ■ | - | - | - | ■ | ms4-frm |
| | 6 | - | - | ■ | ■ | - | ■ | ■ | - | - | - | ■ | ms6-frm |
| | 9 | - | - | ■ | ■ | - | ■ | ■ | - | - | - | ■ | ms9-frm |
| | 12 | - | - | ■ | - | - | - | - | - | - | - | - | ms12-frm |
| Distributor blocks MS-FRM-FRZ | 4 | - | - | - | - | - | - | - | - | - | - | ■ | ms4-frm |
| | 6 | - | - | - | - | - | - | - | - | - | - | ■ | ms6-frm |
| | 9 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |
| Flow sensors SFAM | 4 | - | - | - | - | - | - | - | - | - | - | - | - |
| | 6 | - | - | - | - | - | - | - | ■ | ■ | - | ■ | sfam-62 |
| | 9 | - | - | - | - | - | - | - | ■ | ■ | - | ■ | sfam-90 |
| | 12 | - | - | - | - | - | - | - | - | - | - | - | - |



New


MS...-10V24C/10V24D

Soft-start and quick exhaust valves MS6-SV-C, MS series

Peripherals overview



Soft-start and quick exhaust valve MS6-SV-C

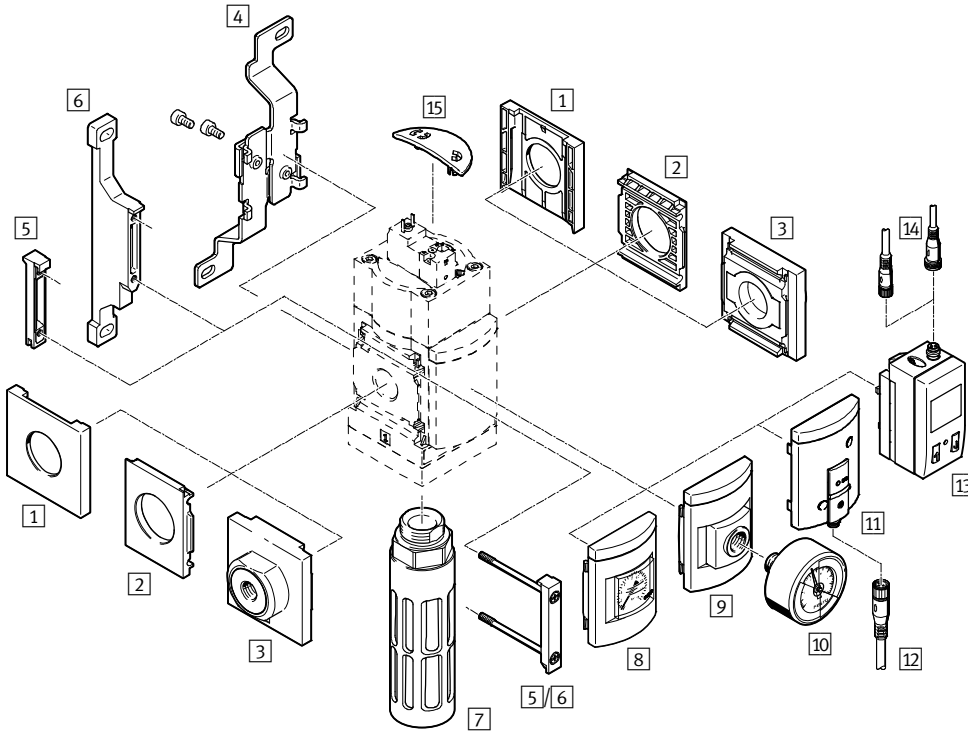



Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter plate for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

Supply voltage
10V24/10V24C

Supply voltage
10V24D/10V24P

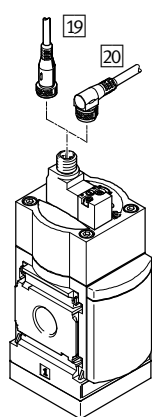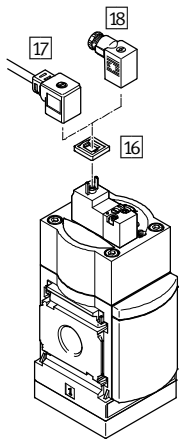

Soft-start and quick exhaust valves MS6-SV-C, MS series

Peripherals overview

| Mounting attachments and accessories | | | | | | |
|--------------------------------------|---|--------------------------|-----------------------|--------------------------|-----------------------|-----------------|
| | | Individual device | | Combination | | → Page/Internet |
| | | Without connecting plate | With connecting plate | Without connecting plate | With connecting plate | |
| 1 | Cover cap MS6-END | - | - | ■ | - | ms6-end |
| 2 | Mounting plate MS6-AEND | ■ ¹⁾ | - | ■ ¹⁾ | - | ms6-aend |
| 3 | Connecting plate-SET MS6-AG... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-ag |
| | Connecting plate-SET MS6-AQ... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-aq |
| 4 | Mounting bracket MS6-WB | ■ | ■ | - | - | ms6-wb |
| 5 | Module connector MS6-MV | - | ■ | ■ | ■ | ms6-mv |
| 6 | Mounting bracket MS6-WP | ■ | ■ | ■ | ■ | ms6-wp |
| | Mounting bracket (not shown) MS6-WPB/WPE/WPM | ■ | ■ | ■ | ■ | ms6-wp |
| 7 | Silencer U-3/4-B | ■ | ■ | ■ | ■ | 60 |
| 8 | MS pressure gauge AG/RG | ■ | ■ | ■ | ■ | 16 |
| 9 | Adapter plate for EN pressure gauge 1/4 A4 | ■ | ■ | ■ | ■ | 16 |
| 10 | Pressure gauge MA | ■ | ■ | ■ | ■ | 61 |
| 11 | Pressure sensor with operational status indicator AD7 ... AD10 | ■ | ■ | ■ | ■ | 16 |
| 12 | Connecting cable NEBU-M8...-LE3 | ■ | ■ | ■ | ■ | 61 |
| 13 | Pressure sensor with LCD display AD1 ... AD4 | ■ | ■ | ■ | ■ | 16 |
| 14 | Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4 | ■ | ■ | ■ | ■ | 61 |
| 15 | Cover MS6-SV-C-MK | ■ | ■ | ■ | ■ | 59 |
| 16 | Illuminating seal MEB-LD | ■ | ■ | ■ | ■ | 61 |
| 17 | Plug socket with cable KMEB | ■ | ■ | ■ | ■ | 60 |
| 18 | Plug socket MSSD-EB | ■ | ■ | ■ | ■ | 60 |
| 19 | Connecting cable NEBU-M12G5 | ■ | ■ | ■ | ■ | 61 |
| 20 | Connecting cable NEBU-M12W5 | ■ | ■ | ■ | ■ | 61 |

1) Module connector MS6-MV [5] or mounting bracket MS6-WP/WPB/WPE/WPM [6] is required for mounting.



New

MS...-10V24C/10V24D

Soft-start and quick exhaust valves MS6-SV-C, MS series

FESTO

Type codes

| | | | | | | | | | | | | | |
|-----------------------------|------------------------------------|----|---|---|----|---|-----|---|---|---|-------|---|---|
| | | MS | 6 | - | SV | - | 1/2 | - | C | - | 10V24 | - | S |
| Series | | | | | | | | | | | | | |
| MS | Standard service unit | | | | | | | | | | | | |
| Size | | | | | | | | | | | | | |
| 6 | Grid dimension 62 mm | | | | | | | | | | | | |
| Service function | | | | | | | | | | | | | |
| SV | Soft-start and quick exhaust valve | | | | | | | | | | | | |
| Pneumatic connection | | | | | | | | | | | | | |
| 1/2 | Female thread G1/2 | | | | | | | | | | | | |
| Performance level | | | | | | | | | | | | | |
| C | Category 1, to EN ISO 13849-1 | | | | | | | | | | | | |
| Supply voltage | | | | | | | | | | | | | |
| 10V24 | Supply voltage 24 V DC | | | | | | | | | | | | |
| Silencer | | | | | | | | | | | | | |
| S | Silencer | | | | | | | | | | | | |


Additional variants can be ordered using the modular product system → 16

- Pneumatic connection
- Supply voltage
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- Tamper protection
- Flow direction


Soft-start and quick exhaust valves MS6-SV-C, MS series





Technical data

MS6-SV-...-10V24/10V24P



MS6-SV-...-10V24C/10V24D



-  Flow rate
5,700 l/min
-  Temperature range
0 ... +60 °C
-  Operating pressure
3 ... 10 bar
-  www.festo.com

Electro-pneumatic soft-start and quick exhaust valve for gradual pressurisation and quick exhausting of system components (single channel). The main flow control valve in the cover permits a gradual build-up of output pressure p2. Once the output pressure p2 has reached the set pressure switchover point (switching pressure), the valve opens and the full operating pressure p1 is present at the output.

- Suitable for applications with high flow rates and restricted space with medium safety requirements up to controller category 1, performance level "c"
- High volumetric flow rate for pressurisation and venting
- The filling flow rate can be set via a flow control valve for gradual pressure build-up
- Adjustable pressure switchover point
- Optional pressure sensor
- Optional cover for the control sections as tamper protection

| Safety characteristics | |
|--|--|
| Conforms to standard | EN ISO 13849-1 |
| Safety function | Exhausting |
| | Avoidance of unexpected start-up (pressurisation) |
| Performance level (PL) | Exhausting: up to category 1, PL c |
| | Avoidance of unexpected start-up (pressurisation): up to category 1, PL c |
| Note on forced dynamisation | Switching frequency min. 1/month |
| CE marking (see declaration of conformity) ¹⁾ | To EC Machinery Directive |
| Shock resistance | Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6 |

1) Additional information www.festo.com/sp → Certificates.

-  **Note on forced dynamisation: switching frequency min. 1/month**

The mechanical system is not tested in the controlled (i.e. pressurised) state. If the process-related switching

frequency (safe exhausting) is less than once a month, the machine's

operator has to carry out a forced switch off.

**New****MS...-10V24C/10V24D****Soft-start and quick exhaust valves MS6-SV-C, MS series****FESTO**

Technical data

| General technical data | | |
|---|--|--|
| Pneumatic connection 1, 2 | | |
| Female thread | G1/2 | |
| Connecting plate AG... | G1/4, G3/8, G1/2 or G3/4 | |
| Connecting plate AQ... | NPT1/4, NPT3/8, NPT1/2 or NPT3/4 | |
| Pneumatic connection 3 | | |
| G3/4 | | |
| Actuation type | | |
| Electric | | |
| Design | | |
| Piston spool valve | | |
| Type of mounting | | |
| Via accessories | | |
| In-line installation | | |
| Mounting position | | |
| Any | | |
| Pressure indicator | | |
| Via pressure sensor for displaying output pressure via LCD display and electrical output | | |
| Via pressure sensor for displaying output pressure via operational status indicator and electrical output | | |
| Via pressure gauge for displaying output pressure | | |
| Via pressure gauge with red/green scale for displaying output pressure | | |
| G1/4 prepared | | |
| Valve function | | |
| 3/2-way valve, closed, single solenoid | | |
| Soft-start function, adjustable | | |
| Non-overlapping | | |
| Yes | | |
| Exhaust function | | |
| No flow control | | |
| Manual override | | |
| 10V24 | At the pilot solenoid valve: non-detenting | |
| | At the soft-start and quick exhaust valve: detenting, self-resetting | |
| 10V24P | At the pilot solenoid valve: non-detenting/detenting | |
| | At the soft-start and quick exhaust valve: detenting, self-resetting | |
| 10V24C/10V24D | None | |
| Reset method | | |
| Mechanical spring | | |
| Type of control | | |
| Piloted | | |
| Pilot air supply | | |
| Internal | | |
| Sealing principle | | |
| Soft | | |

• Note: This product conforms to ISO 1179-1 and to ISO 228-1

| Flow rate characteristics | | |
|--|---------------------|--------------------|
| Pneumatic connection | | Female thread G1/2 |
| Standard nominal flow rate $q_{nN}^{1)}$ [l/min] | | |
| In main flow direction 1 \rightarrow 2 | 5,700 | |
| Standard flow rate q_N [l/min], $p_2 = 6$ bar | | |
| In venting direction 2 \rightarrow 3 | 7,600 ²⁾ | |
| C value [l/s*min] | | |
| In main flow direction 1 \rightarrow 2 | 23.2 | |
| b value | | |
| In main flow direction 1 \rightarrow 2 | 0.4 | |

1) Measured at $p_1 = 6$ bar and $p_2 = 5$ bar, $\Delta p = 1$ bar

2) Measured with respect to atmosphere with silencer S

| Electrical data | | |
|-------------------------|--|--|
| Coil characteristics | | |
| 10V24/10V24P | 24 V DC: 1.8 W; permissible voltage fluctuations $-10\%/+10\%$ | |
| 10V24C/10V24D | 24 V DC: 1.8 W; permissible voltage fluctuations $-15\%/+10\%$ | |
| Electrical connection | | |
| 10V24/10V24C | Plug, 2-pin, to EN 175301-803, type C | |
| 10V24D/10V24P | M12x1 to ISO 20401 suitable to EN 61076-2-101 | |
| Protection class | | |
| IP65 with plug socket | | |
| Duty cycle [%] | | |
| 100 | | |
| Switching time off [ms] | | |
| 65 | | |
| Switching time on [ms] | | |
| 370 | | |

Soft-start and quick exhaust valves MS6-SV-C, MS series

FESTO

Technical data

| Operating and environmental conditions | |
|--|--|
| Operating pressure [bar] | 3 ... 10 |
| Operating medium | Compressed air according to ISO 8573-1:2010 [7:4:4] |
| Note on operating/pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) |
| Ambient temperature [°C] | 0 ... +60 (0 ... +50) ¹⁾ |
| Temperature of medium [°C] | 0 ... +60 (0 ... +50) ¹⁾ |
| Storage temperature [°C] | -10 ... +60 (0 ... +50) ¹⁾ |
| Corrosion resistance class CRC ²⁾ | 2 |
| CE marking (see declaration of conformity) ³⁾ | To EU Machinery Directive |

1) With pressure sensor AD...

2) Corrosion resistance class CRC 2 to Festo standard FN 940070


Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) Additional information www.festo.com/sp → Certificates.

| Weight [g] | |
|--|-------|
| Soft-start and quick exhaust valve | 886 |
| Soft-start and quick exhaust valve with silencer S | 1,006 |

| Materials | |
|-------------------|----------------------------|
| Housing | Die-cast aluminium |
| Piston rod | High-alloy stainless steel |
| Seals | NBR |
| Note on materials | RoHS-compliant |

Adjusting elements



1) Screw for adjusting the pressure switchover point

2) Flow control screw for adjusting the filling time

3) Manual override at the soft-start and quick exhaust valve:

- Detenting, self-resetting as soon as the solenoid coil or manual override at the pilot solenoid valve is actuated (with 10V24/10V24P).

4) Manual override at the pilot solenoid valve:

- Non-detenting, actuation from above (with 10V24)
- Non-detenting/detenting, actuation from above (with 10V24P)

New
MS...-10V24C/10V24D

Soft-start and quick exhaust valves MS6-SV-C, MS series

Technical data

FESTO

Dimensions – Basic design

Download CAD data → www.festo.com

With female thread 1/2, with cover plate

Supply voltage
10V24/10V24C

Supply voltage
10V24D/10V24P

1 = Unused
2 = Unused
3 = com (-)
4 = Signal (+) solenoid 14

With silencer S

1 Plug connection to EN 175301-803
2 Electrical connection M12x1 to ISO 20401 suitable to EN 61076-2-101, version 4 pin for connecting cable NEBU-M12

→ Flow direction

| Type | B1 | B4 | B5 | D1 | D2 | D5 | L1 | L2 | L4 |
|----------|----|----|----|------|-------|------|-----|----|-----|
| MS6-SV-C | 62 | 31 | 76 | G1/2 | M12x1 | G3/4 | 144 | 71 | 128 |

| Type | L8 | | L9 | |
|----------|--------------|---------------|--------------|---------------|
| | 10V24/10V24C | 10V24D/10V24P | 10V24/10V24C | 10V24D/10V24P |
| MS6-SV-C | 33 | 37 | 24 | 26 |

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → www.festo.com

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar]

Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

→ Flow direction

→ Flow direction

| Type | B4 | B5 | D4 |
|---------------|----|------|------|
| MS6-SV:...-AG | 31 | 77 | – |
| MS6-SV:...-RG | 31 | 78.5 | – |
| MS6-SV:...-A4 | 31 | 78.5 | G1/4 |

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS6-SV-C, MS series


Technical data

Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → www.festo.com

Pressure sensor with LCD display AD1 ... AD4

Technical data → Internet: sde1

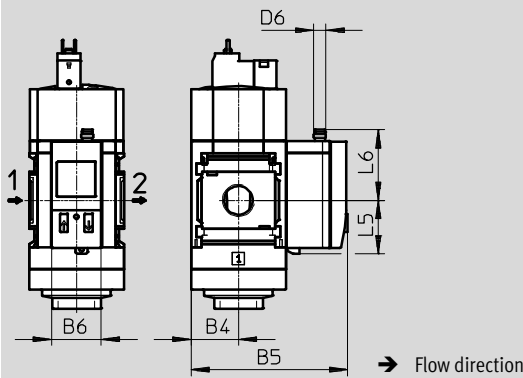

Variant AD1:
SDE1-D10-G2-MS-L-P1-M8 with
3-pin plug M8x1, 1 switching out-
put PNP


Variant AD3:
SDE1-D10-G2-MS-L-PI-M12 with
4-pin plug M12x1, 1 switching out-
put PNP and 4 ... 20 mA analogue

Variant AD2:
SDE1-D10-G2-MS-L-N1-M8 with
3-pin plug M8x1, 1 switching out-
put NPN

Variant AD4:
SDE1-D10-G2-MS-L-NI-M12 with
4-pin plug M12x1, 1 switching out-
put NPN and 4 ... 20 mA analogue

Pressure sensor with operational status indicator AD7 ... AD10

Technical data → Internet: sde5

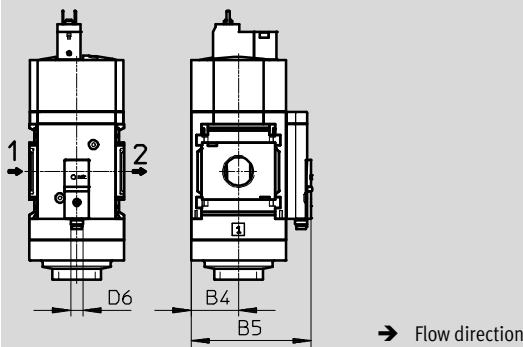

Variant AD7:
SDE5-D10-O-...-P-M8 with 3-pin
plug M8x1, threshold value compar-
ator, 1 switching output PNP, N/O
contact

Variant AD9:
SDE5-D10-O3-...-P-M8 with 3-pin
plug M8x1, window comparator, 1
switching output PNP, N/O contact

Variant AD8:
SDE5-D10-C-...-P-M8 with 3-pin
plug M8x1, threshold value compar-
ator, 1 switching output PNP, N/C
contact

Variant AD10:
SDE5-D10-C3-...-P-M8 with 3-pin
plug M8x1, window comparator, 1
switching output PNP, N/C contact


| Type | B4 | B5 | B6 | D6 | L5 | L6 |
|-----------------------------|----|-----|------|-------|------|------|
| MS6-SV-...-AD1/AD2 | 31 | 102 | 32.3 | M8x1 | 35.1 | 46.7 |
| MS6-SV-...-AD3/AD4 | | | | M12x1 | | 55.8 |
| MS6-SV-...-AD7/AD8/AD9/AD10 | 31 | 79 | - | M8x1 | - | - |

★ **Core product range**

| Ordering data | | |
|---------------|------------|---------------------------------------|
| Size | Connection | With silencer |
| | | Part No. Type |
| Cover plate | | |
| MS6 | G1/2 | ★ 8001469 MS6-SV-1/2-C-10V24-S |

Festo core product range

- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock

 **New**

MS...-10V24C/10V24D

Soft-start and quick exhaust valves MS6-SV-C, MS series



Ordering data – Modular products

| M Mandatory data → | | | | | | |
|-------------------------|-----------|----------|-------------|----------------------|-------------------|-------------------------------|
| Module No. | Series | Size | Function | Pneumatic connection | Performance level | Supply voltage |
| 548713 | MS | 6 | SV | 1/2, AG..., AQ... | C | 10V24, 10V24C, 10V24D, 10V24P |
| Ordering example | | | | | | |
| 548713 | MS | 6 | - SV | - AGB | - C | - 10V24 |

| Ordering table | | | | | |
|----------------|----------------------|---|-------------|----------------|------------|
| Grid dimension | [mm] | 62 | Condi-tions | Code | Enter code |
| M | Module No. | 548713 | | | |
| | Series | Standard | | MS | MS |
| | Size | 6 | | 6 | 6 |
| | Function | Soft-start and quick exhaust valve | | -SV | -SV |
| | Pneumatic connection | Female thread G1/2 | | -1/2 | |
| | | Connecting plate G1/4 | | -AGB | |
| | | Connecting plate G3/8 | | -AGC | |
| | | Connecting plate G1/2 | | -AGD | |
| | | Connecting plate G3/4 | | -AGE | |
| | | Connecting plate NPT1/4 | | -AQN | |
| | | Connecting plate NPT3/8 | | -AQP | |
| | | Connecting plate NPT1/2 | | -AQR | |
| | | Connecting plate NPT3/4 | | -AQS | |
| | Performance level | Category 1, 1-channel, to EN ISO 13849-1 | | -C | -C |
| | Supply voltage | 24 V DC (pin allocation to EN 175301), 3 ... 10 bar | | -10V24 | |
| | | 24 V DC (pin allocation to EN 175301), 3 ... 10 bar, without manual override | | -10V24C | |
| | | 24 V DC, M12x1 to ISO 20401 suitable to EN 61076-2-101, 3 ... 10 bar, without manual override | | -10V24D | |
| | | 24 V DC, M12x1 to ISO 20401 suitable to EN 61076-2-101, 3 ... 10 bar | | -10V24P | |

Transfer order code

| | | | | | | | |
|---------------|-----------|----------|-------------|----------|----------|----------|--|
| 548713 | MS | 6 | - SV | - | C | - | |
|---------------|-----------|----------|-------------|----------|----------|----------|--|

Soft-start and quick exhaust valves MS6-SV-C, MS series

FESTO

Ordering data – Modular products

| Options | | | | | |
|----------|---|-------------------------------------|------------------|-------------------|----------------|
| Silencer | Pressure gauge/ pressure gauge alternatives | Alternative pressure gauge scale | Type of mounting | Tamper protection | Flow direction |
| S | AG, A4, RG, AD1 ... AD4, AD7 ... AD10 | PSI, MPA | WP, WPM, WPB, WB | MK | Z |
| - S | - AG | - | - WP | - | - |

| Ordering table | | | | | |
|---|----------------------------------|--|-----------------|-------|---------------|
| Grid dimension | [mm] | 62 | Condi- tions | Code | Enter code |
| 0 Silencer | | Silencer | | -S | |
| Pressure gauge/pressure gauge alternatives | | MS pressure gauge | 1 | -AG | |
| | | Adapter plate for EN pressure gauge 1/4, without pressure gauge | | -A4 | |
| | | Integrated pressure gauge, red/green scale | 1 | -RG | |
| | | Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin | 2 | -AD1 | |
| | | Pressure sensor with LCD display, plug M8, 1 switching output NPN, 3-pin | 2 | -AD2 | |
| | | Pressure sensor with LCD display, plug M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA | 2 | -AD3 | |
| | | Pressure sensor with LCD display, plug M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA | 2 | -AD4 | |
| | | Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/O contact | 2 | -AD7 | |
| | | Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/C contact | 2 | -AD8 | |
| | | Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/O contact | 2 | -AD9 | |
| | | Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/C contact | 2 | -AD10 | |
| | Alternative pressure gauge scale | | psi | 3 | -PSI |
| | | MPa | 3 | -MPA | |
| Type of mounting | | Mounting bracket standard design | | -WP | |
| | | Mounting bracket for attaching the service units | 4 | -WPM | |
| | | Mounting bracket for large wall gap | | -WPB | |
| | | Mounting bracket centrally at rear (wall mounting top and bottom), connecting plates not required | | -WB | |
| Tamper protection | | Complete (manual override at soft-start/quick exhaust valve locked, adjusting screw locked, manual override at pilot solenoid valve locked (only with supply voltage 10V24, 10V24P)) | | -MK | |
| Flow direction | | Flow direction from right to left | | -Z | |

1 **AG, RG** Pressure gauge scale in bar

2 **AD1 ... AD4, AD7 ... AD10**
Measuring range max. 10 bar

3 **PSI, MPA** Only in combination with pressure gauge AG or RG.

With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar

4 **WPM** Only with connecting plate AGB, AGC, AGD, AGE, AQN, AQP, AQR or AQS

Transfer order code


- - - - - -


Soft-start and quick exhaust valves MS6-SV-D, MS series

Peripherals overview



Soft-start and quick exhaust valve MS6-SV-D

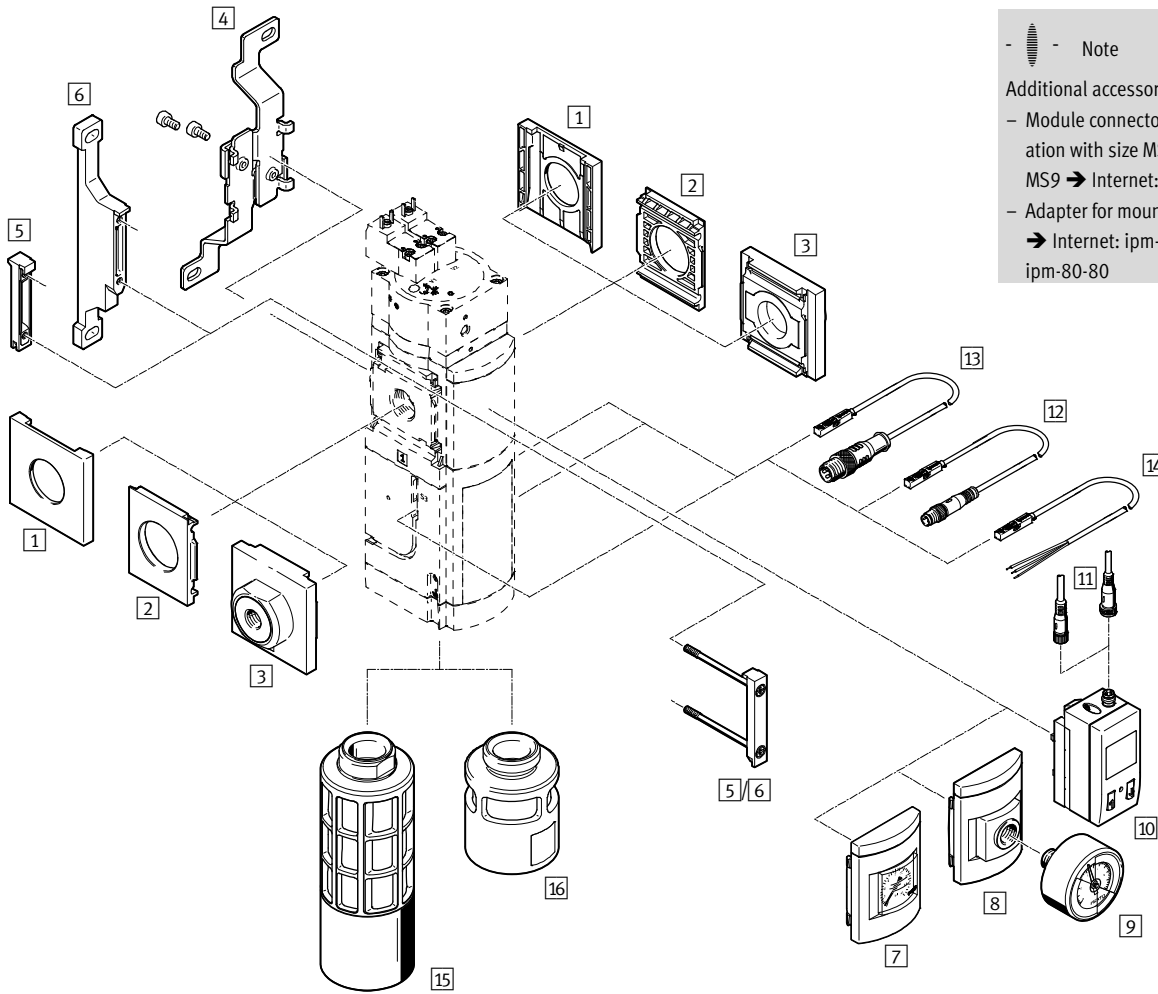


-  - Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

Supply voltage
10V24

Supply voltage
10V24P

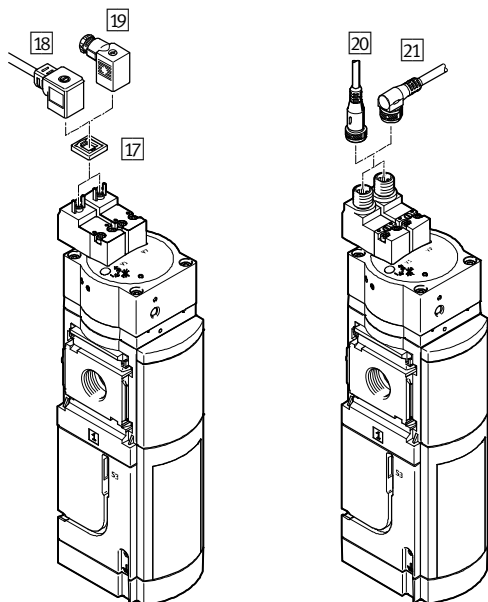

Soft-start and quick exhaust valves MS6-SV-D, MS series

Peripherals overview

| Mounting components and accessories | | | | | | |
|-------------------------------------|--|--------------------------|-----------------------|--------------------------|-----------------------|-----------------|
| | | Individual device | | Combination | | → Page/Internet |
| | | Without connecting plate | With connecting plate | Without connecting plate | With connecting plate | |
| 1 | Cover cap MS6-END | - | - | ■ | - | ms6-end |
| 2 | Mounting plate MS6-AEND | ■ ¹⁾ | - | ■ ¹⁾ | - | ms6-aend |
| 3 | Connecting plate kit MS6-AG... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-ag |
| | Connecting plate kit MS6-AQ... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-aq |
| 4 | Mounting bracket MS6-WB | ■ | ■ | - | - | ms6-wb |
| 5 | Module connector MS6-MV | - | ■ | ■ | ■ | ms6-mv |
| 6 | Mounting bracket MS6-WP | ■ | ■ | ■ | ■ | ms6-wp |
| | Mounting bracket (not shown) MS6-WPB/WPE/WPM | ■ | ■ | ■ | ■ | ms6-wp |
| 7 | MS pressure gauge AG/RG | ■ | ■ | ■ | ■ | 30 |
| 8 | Adapter for EN pressure gauge 1/4 A4 | ■ | ■ | ■ | ■ | 30 |
| 9 | Pressure gauge MA | ■ | ■ | ■ | ■ | 61 |
| 10 | Pressure sensor with LCD display AD1 ... AD4 | ■ | ■ | ■ | ■ | 30 |
| 11 | Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4 | ■ | ■ | ■ | ■ | 61 |
| 12 | Proximity sensor 2M8/S3, SMT-8M-A...-M8D | ■ | ■ | ■ | ■ | 30, 60 |
| 13 | Proximity sensor 2M12/S3, SMT-8M-A...-M12 | ■ | ■ | ■ | ■ | 30, 60 |
| 14 | Proximity sensor 2OE/S3, SMT-8M-A...-OE | ■ | ■ | ■ | ■ | 30, 60 |
| 15 | Pneumatic Silencer SO, UOS-1 | ■ | ■ | ■ | ■ | 30, 58 |
| 16 | Pneumatic Silencer UOS-1-LF | ■ | ■ | ■ | ■ | 58 |
| 17 | Illuminating seal MEB-LD | ■ | ■ | ■ | ■ | 61 |
| 18 | Plug socket with cable KMEB | ■ | ■ | ■ | ■ | 60 |
| 19 | Plug socket MSSD-EB | ■ | ■ | ■ | ■ | 60 |
| 20 | Connecting cable NEBU-M12G5 | ■ | ■ | ■ | ■ | 61 |
| 21 | Connecting cable NEBU-M12W5 | ■ | ■ | ■ | ■ | 61 |

1) Module connector MS6-MV⁵⁾ or mounting bracket MS6-WP/WPB/WPE/WPM⁶⁾ is required for mounting.

Soft-start and quick exhaust valves MS6-SV-D, MS series

Type codes

MS 6 - SV - 1/2 - D - 10V24 - 20E - SO - AG

| Series | |
|--|--|
| MS | Standard service unit |
| Size | |
| 6 | Grid dimension 62 mm |
| Service function | |
| SV | Soft-start and quick exhaust valve |
| Pneumatic connection | |
| 1/2 | Female thread G1/2 |
| Performance Level | |
| D | Category 3, 2-channel, to EN ISO 13849-1 |
| Supply voltage | |
| 10V24 | 24 V DC (connection to EN 175301) |
| 10V24P | 24 V DC, M12 to IEC 61076-2-101 |
| Connection technology | |
| 2M8 | 2 proximity sensors SMT (cable with plug connector M8x1, 3-pin, cable length 0.3 m) |
| 2M12 | 2 proximity sensors SMT (cable with plug connector M12x1, 3-pin, cable length 0.3 m) |
| 20E | 2 proximity sensors SMT (cable with open end, cable length 5 m) |
| Pneumatic silencer | |
| | Without pneumatic silencer |
| SO | Pneumatic silencer open |
| Pressure gauge/pressure gauge alternatives | |
| | Cover plate |
| AG | MS pressure gauge |


Additional variants can be ordered using the modular product system → 30

- Pneumatic connection
- Extended sensing
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- UL certification
- Flow direction

Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

Function



- - Flow rate
4300 l/min
- - Temperature range
-10 ... +50 °C
- - Operating pressure
3.5 ... 10 bar
- - www.festo.com



The electropneumatic soft-start and quick exhaust valve is used to reduce pressure quickly and safely and to build up pressure gradually in industrial pneumatic piping systems and terminal equipment.

The MS6-SV-D has two safety functions:

- pressure release
- protection from unexpected start-up (non-switching)

The MS6-SV-D has a 2-channel structure, i.e. it has two internal 2-way

valves which can be controlled separately by pilot valves (V1 and V2) situated on the cover. These valves are actuated when both coils are energised simultaneously; this changes the MS6-SV-D from the normal position to the switching position. The outlet pressure p2 rises slowly in accordance with the throttle setting. The main seat opens when the switch-through pressure is reached. The normal position is achieved by switching off both coils. Two proximity sensors (S1 and S2)

secured on the housing monitor the directional control valves. A further proximity sensor (S3) can optionally be added to monitor the soft-start valve.

The MS6-SV-D can achieve various categories and safety levels to EN ISO 13849-1 depending on how the directional control valves are monitored.

Where there is appropriate integration into the control chain as well as

appropriate linking of the signals for initial position sensing with the signals for activation (plausibility checking):

- Performance Level d/category 3 to EN ISO 13849-1 and EN ISO 13849-2 can be achieved when using sensors S1 and S2 and
- Performance Level e/category 4 to EN ISO 13849-1 and EN ISO 13849-2 can be achieved when using sensors S1, S2 and S3.

- Note
To avoid back pressures, it is recommended that the device be operated together with the silencer UOS-1. The silencer can be ordered via the modular product system (SO → 30) or as an accessory (UOS-1 → 58).

- Note
Only devices that do not impair pressure release may be positioned downstream of the MS6-SV-...-D. The MS6-SV-...-D is not permitted for use as a press safety valve.

- Conforms to standard IEC 61508
- Switching time delay adjustable via a flow control valve for gradual pressure build-up; main seat opens at approx. 50% of operating pressure
- Optional pressure sensor

Soft-start and quick exhaust valves MS6-SV-D, MS series


FESTO

Technical data

| Safety characteristics | | |
|--|--|---|
| Conforms to standard | EN ISO 13849-1 and EN ISO 13849-2 | |
| Safety function | Exhausting | |
| | Avoidance of unexpected start-up (pressurisation) | |
| Performance Level (PL) | With sensing by S1 and S2 | Exhausting: category 3, PL d or category 3, PL e ¹⁾ |
| | | Avoidance of unexpected start-up (pressurisation): category 3, PL d or category 3, PL e ¹⁾ |
| | With sensing by S1, S2 and S3 | Exhausting: category 4, PL e |
| | | Avoidance of unexpected start-up (pressurisation): category 4, PL e |
| Safety integrity level (SIL) | Exhausting: SIL 3 | |
| | Avoidance of unexpected start-up (pressurisation): SIL 3 | |
| Note on forced dynamisation | Switching frequency min. 1/month | |
| CE marking (see declaration of conformity) ²⁾ | To EC Machinery Directive | |
| Shock resistance | Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27 | |
| Vibration resistance | Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6 | |

1) Dependent on the average number of annual actuations (n_{op}).

2) Additional information www.festo.com/sp → Certificates.

 **Note on forced dynamisation: switching frequency min. 1/month**

The mechanical system is not tested in the controlled (i.e. pressurised) state. If the process-related switching frequency (safe exhausting) is less than once a month, the machine's operator has to carry out a forced switch off.

Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

| Switching logic | Voltage at the pilot valve | | Switching position Proximity sensor | | | Status |
|---|----------------------------|------|-------------------------------------|----|----|--|
| | V1 | V2 | S1 | S2 | S3 | |
| In the normal position (completely exhausted MS6-SV-D), the pilot valves V1 and V2 are not actuated. If both pilot valves are actuated, the MS6-SV-D switches first into switching position 1 and then, when the switch-through pressure is reached, automatically into switching position 2. | 0 V | 0 V | 1 | 1 | 1 | Normal position Pneumatic port 1 closed, passage from pneumatic port 2 to 3 open |
| | 24 V | 0 V | 0 | 1 | 1 | Normal position Pneumatic port 1 closed, passage from pneumatic port 2 to 3 open |
| | 0 V | 24 V | 1 | 0 | 1 | Normal position Reduced flow through flow control valve from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 open |
| | 24 V | 24 V | 0 | 0 | 1 | Switching element position 1 Reduced flow through flow control valve from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 closed |
| | 24 V | 24 V | 0 | 0 | 0 | Switching position 2 Full flow from pneumatic port 1 to 2, passage from pneumatic port 2 to 3 closed |

| Proximity sensor response times ¹⁾ | | |
|---|--|--|
| Proximity sensor | Switching on | Switching off |
| S1 | Edge change max. 4 s after voltage signal at V1. | Edge change max. 4 s after voltage drop at V1. |
| S2 | Edge change max. 4 s after voltage signal at V2. | Edge change max. 4 s after voltage drop at V2. |
| S3 | Edge change after voltage signal at V1 and V2. Dependent on operating pressure p1, throttle position and system volume p2 | Edge change max. 5 s after voltage drop at V1 and V2. Dependent on system volume at p2. |

1) When the proximity sensors undergo an edge change, bounce can occur. This bounce can be ignored by taking the response times into account. The maximum specified response times must be considered in the diagnostics. The response times are normally shorter.

Example circuit

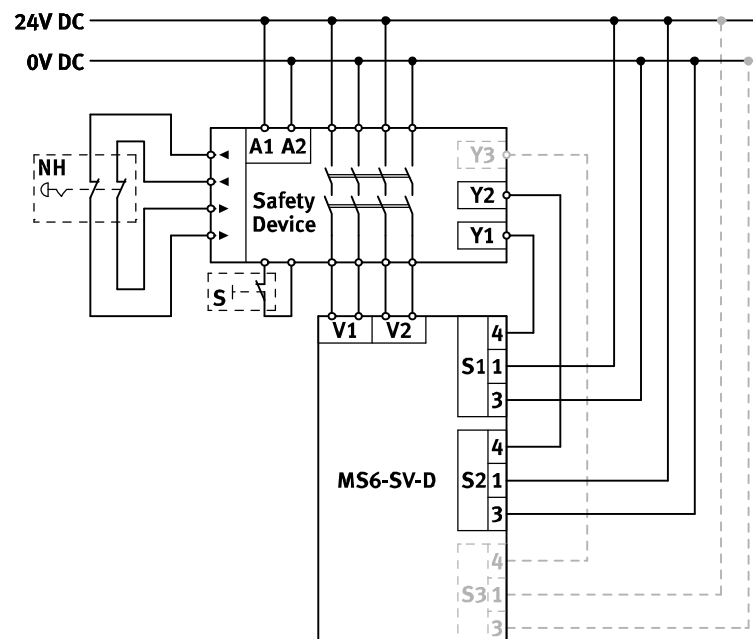

- A1, A2: Supply voltage
- S1: Proximity sensor S1
- S2: Proximity sensor S2
- S3: Proximity sensor S3
- NH: Emergency stop (input circuit)
- Safety device: Safety switching device or safety PLC
- V1: Coil connection, pilot valve V1
- V2: Coil connection, pilot valve V2
- Y1: Diagnostic input 1
- Y2: Diagnostic input 2
- Y3: Diagnostic input 3
- S: Monitored start (start circuit)

Soft-start and quick exhaust valves MS6-SV-D, MS series

FESTO

Technical data

| General technical data | |
|----------------------------|--|
| Pneumatic port 1, 2 | |
| Female thread | G1/2 |
| Connecting plate AG... | G1/4, G3/8, G1/2 or G3/4 |
| Connecting plate AQ... | NPT1/4, NPT3/8, NPT1/2 or NPT3/4 |
| Pneumatic port 3 | G1 |
| Actuation type | Electric |
| Design | Piston seat |
| Type of mounting | Via accessories |
| | In-line installation |
| Mounting position | Any |
| Pressure indicator | Via pressure sensor for displaying output pressure via LCD display and electrical output |
| | Via pressure gauge for displaying output pressure |
| | Via pressure gauge with red/green scale for displaying output pressure |
| | G1/4 prepared |
| Position sensing principle | Magnetic piston principle |
| Valve function | 3/2-way valve, closed, single solenoid |
| | Soft-start function, adjustable |
| Non-overlapping | No |
| Exhaust function | No flow control |
| Manual override | None |
| Reset method | Mechanical spring |
| Type of control | Piloted |
| Pilot air supply | Internal |
| Sealing principle | Soft |

• Note: This product conforms to ISO 1179-1 and to ISO 228-1

| Flow rate characteristics | |
|--|--------------------|
| Pneumatic connection | Female thread G1/2 |
| Standard nominal flow rate $q_{nN}^{1)}$ [l/min] | |
| In main flow direction 1 \rightarrow 2 | 4300 |
| Standard flow rate q_N [l/min], $p_2 = 6$ bar | |
| In venting direction 2 \rightarrow 3 | 9000 ²⁾ |
| C value [l/s*min] | |
| In main flow direction 1 \rightarrow 2 | 19.3 |
| b value | |
| In main flow direction 1 \rightarrow 2 | 0.21 |

1) Measured at $p_1 = 6$ bar and $p_2 = 5$ bar, $\Delta p = 1$ bar

2) Measured with respect to atmosphere with silencer S

Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

| Electrical data | | |
|---|-----------|---|
| Pilot valve | | |
| Coil characteristics | | 24 V DC: 1.8 W; permissible voltage fluctuations -15%/+10% |
| Electrical connection | 10V24 | 2 x plug connectors, 2-pin, to EN 175301-803, type C |
| | 10V24P | 2 x M12x1 to ISO 20401 suitable to EN 61076-2-101 |
| Degree of protection | | IP65 with plug socket |
| Duty cycle | [%] | 100 |
| Max. switching frequency | [Hz] | 1 |
| Switching time off | [ms] | 40 |
| Switching time on | [ms] | 130 |
| Proximity sensor | | |
| Nominal operating voltage | [V DC] | 24 |
| Electrical connection, proximity sensor | 2M8 | 2 x cables with plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m |
| | 2M12 | 2 x cables with plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m |
| | 2OE | 2 x cable with open end, 3-wire, cable length 5 m |
| | 2M8 + S3 | 3 x cables with plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m |
| | 2M12 + S3 | 3 x cables with plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m |
| | 2OE + S3 | 3 x cable with open end, 3-wire, cable length 5 m |
| Switching element function | | N/O contact |
| Measuring principle | | Magneto-resistive |
| Signal status display | | LED and switching outputs |
| Switching output | | PNP |

| Operating and environmental conditions | | |
|--|---------|--|
| Operating pressure | [bar] | 3.5 ... 10 |
| Operating medium | | Compressed air according to ISO 8573-1:2010 [7:4:4] |
| Note on operating/pilot medium | | Lubricated operation possible (in which case lubricated operation will always be required) |
| Ambient temperature | [°C] | -10 ... +50 (0 ... +50) ¹⁾ |
| Temperature of medium | [°C] | -10 ... +50 (0 ... +50) ¹⁾ |
| Storage temperature | [°C] | -10 ... +50 (0 ... +50) ¹⁾ |
| Corrosion resistance class CRC ²⁾ | | 2 |
| Noise level | [dB(A)] | 75 (with silencer UOS-1) |
| CE marking (see declaration of conformity) ³⁾ | | To EU Machinery Directive |
| Certification (variant UL1) | | c UL us - Recognized (OL) |
| Certification | | RCM Mark |

1) With pressure sensor AD...

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) Additional information www.festo.com/sp → Certificates.

Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

| Weight [g] | |
|--|------|
| Soft-start/quick exhaust valve | 1900 |
| Soft-start/quick exhaust valve with silencer UOS-1 | 2110 |

| Materials | |
|-------------------|----------------------------|
| Housing | Die-cast aluminium |
| Piston rod | High-alloy stainless steel |
| Seals | NBR |
| Note on materials | RoHS-compliant |

Switch-through pressure

Pressure p as a function of time t

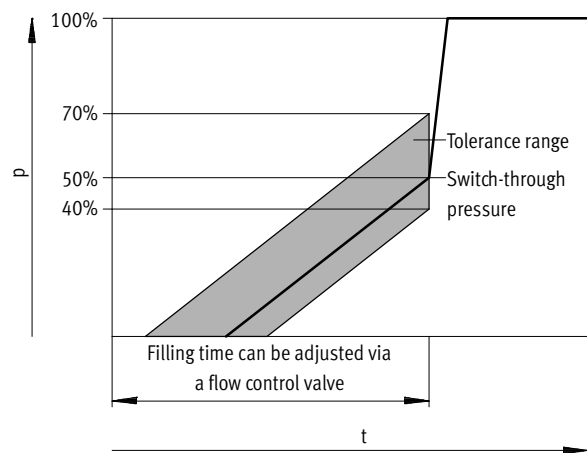

Note

The +20%/–10% switch-through pressure tolerance refers to the operating pressure p₁.
 Example: A switch-through pressure from 1.6 bar to 2.8 bar is permissible at an operating pressure of 4 bar.

Soft-start and quick exhaust valves MS6-SV-D, MS series


Technical data

Dimensions – Basic design

Download CAD data → www.festo.com

With supply voltage 10V24, with female thread 1/2, with cover plate

With supply voltage 10V24P, with female thread 1/2, with cover plate

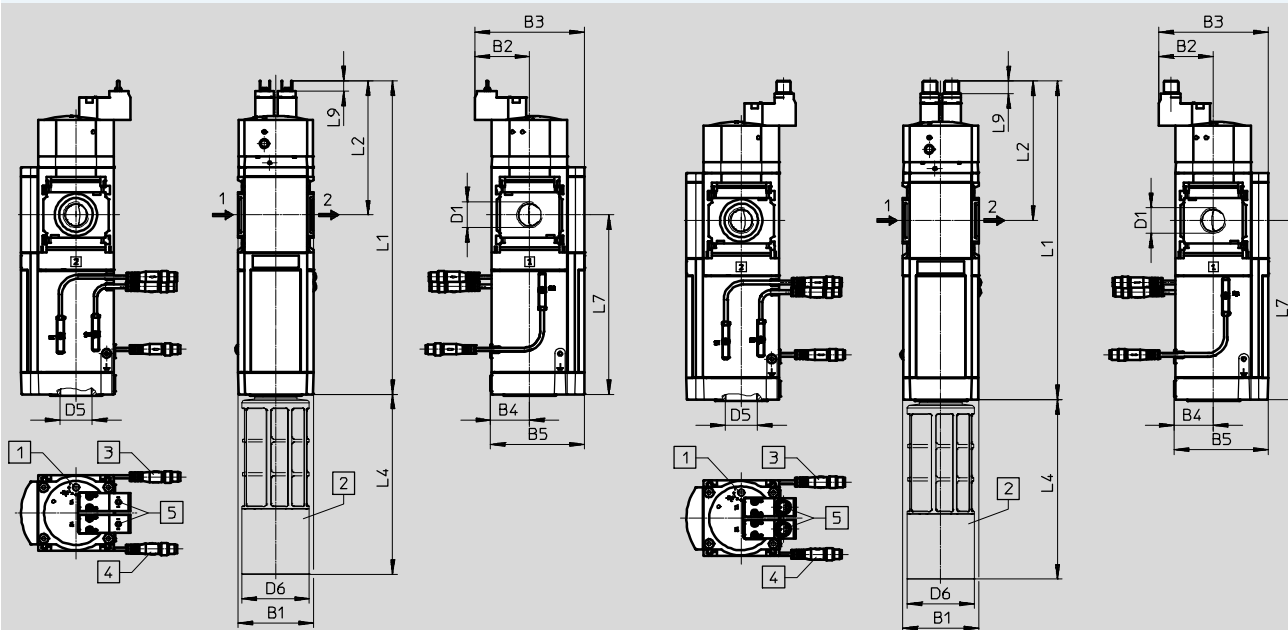

- 1 = Unused
- 2 = Unused
- 3 = com (-)
- 4 = Signal (+) solenoid 14

- 1 Regulating screw for flow control valve
 - 2 Silencer UOS-1
 - 3 Extended sensing, variant S3: additional third proximity sensor SMT, port depends on connection technology chosen 4
 - 4 Connection technology,
 - variant 2M8: 2 proximity sensors SMT with cable (plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m)
 - variant 2M12: 2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m)
 - variant 20E: 2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m)
 - 5 Supply voltage,
 - variant 10V24: Electrical connection to EN 175301-803, 2 x plug connectors, 2-pin, type C
 - variant 10V24P: Electrical connection 2 x M12x1 to ISO 20401 suitable to EN 61076-2-101, version 4 pin for connecting cable NEBU-M12
- Flow direction

| Type | B1 | B2 | B3 | B4 | B5 | D1 | D5 | D6 ∅ | L1 | L2 | L4 | L7 | L9 |
|---------------------|----|----|----|----|----|------|----|---------|-----|-----|-----|-----|----|
| MS6-SV-1/2-D-10V24 | 62 | 45 | 90 | 31 | 76 | G1/2 | G1 | 55 | 257 | 110 | 147 | 147 | 9 |
| MS6-SV-1/2-D-10V24P | | | | | | | | | 262 | 115 | | | 11 |


- | - Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS6-SV-D, MS series

Technical data

Dimensions – Pressure gauge/pressure gauge alternatives Download CAD data → www.festo.com

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar] Adapter A4 for EN pressure gauge 1/4, without pressure gauge

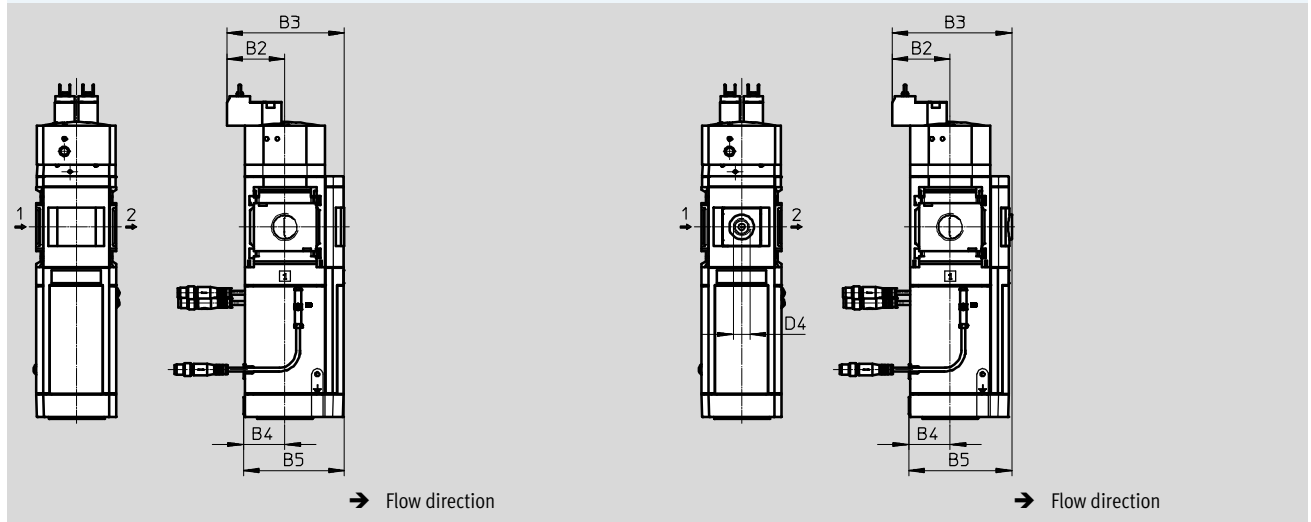


| Type | B2 | B3 | B4 | B5 | D4 |
|---------------------|----|------|----|------|------|
| MS6-SV-...-D-...-AG | 44 | 90 | 31 | 77 | - |
| MS6-SV-...-D-...-RG | 44 | 91.5 | 31 | 78.5 | - |
| MS6-SV-...-D-...-A4 | 44 | 91.5 | 31 | 78.5 | G1/4 |

⚡ Note: This product conforms to ISO 1179-1 and to ISO 228-1

Dimensions – Pressure gauge/pressure gauge alternatives Download CAD data → www.festo.com

Pressure sensor with LCD display AD1 ... AD4 Technical data → Internet: sde1

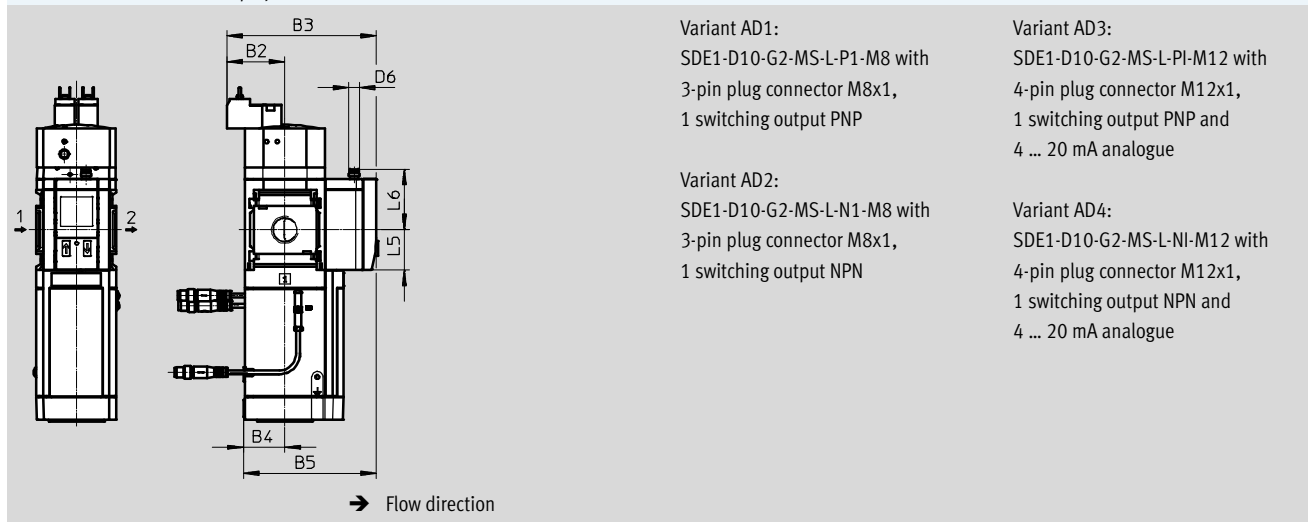

Variant AD1:
SDE1-D10-G2-MS-L-P1-M8 with
3-pin plug connector M8x1,
1 switching output PNP

Variant AD2:
SDE1-D10-G2-MS-L-N1-M8 with
3-pin plug connector M8x1,
1 switching output NPN

Variant AD3:
SDE1-D10-G2-MS-L-PI-M12 with
4-pin plug connector M12x1,
1 switching output PNP and
4 ... 20 mA analogue

Variant AD4:
SDE1-D10-G2-MS-L-NI-M12 with
4-pin plug connector M12x1,
1 switching output NPN and
4 ... 20 mA analogue

| Type | B2 | B3 | B4 | B5 | D6 | L5 | L6 |
|--------------------------|----|-----|----|-----|-------|------|------|
| MS6-SV-...-D-...-AD1/AD2 | 44 | 116 | 31 | 103 | M8x1 | 31.2 | 46.8 |
| MS6-SV-...-D-...-AD3/AD4 | | | | | M12x1 | | 55.8 |

⚡ Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS6-SV-D, MS series

FESTO

Technical data

| Ordering data | | | | | |
|---|------|--|-------------------------------|---|---------------------------------------|
| Size | Port | Without pneumatic silencer, with cover plate | | With silencer and MS pressure gauge with standard scale, display unit [bar] | |
| | | Part No. | Type | Part No. | Type |
| Electrical connection to EN 175301-803 (2 x plug connectors, 2-pin, type C), 2 proximity sensors SMT with cable (plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m) | | | | | |
| MS6 | G1/2 | 8038489 | MS6-SV-1/2-D-10V24-2M8 | 8038490 | MS6-SV-1/2-D-10V24-2M8-SO-AG |
| Electrical connection to IEC 61076-2-101 (2 x plug connectors M12x1, 2-pin for NEBU-M12), 2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m) | | | | | |
| MS6 | G1/2 | – | | 8038491 | MS6-SV-1/2-D-10V24P-2M12-SO-AG |
| Electrical connection to EN 175301-803 (2 x plug connectors, 2-pin, type C), 2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m) | | | | | |
| MS6 | G1/2 | – | | 8038492 | MS6-SV-1/2-D-10V24-20E-SO-AG |

Soft-start and quick exhaust valves MS6-SV-D, MS series



Ordering data – Modular products

| M Mandatory data → | | | | | | | |
|-------------------------|-----------|----------|-------------|----------------------|-------------------|----------------|-----------------------|
| Module no. | Series | Size | Function | Pneumatic connection | Performance Level | Supply voltage | Connection technology |
| 548713 | MS | 6 | SV | 1/2, AG..., AQ... | D | 10V24, 10V24P | 2M8, 2M12, 20E |
| Ordering example | | | | | | | |
| 548713 | MS | 6 | - SV | - AGB | - D | - 10V24 | - 20E |

| Ordering table | | | | | |
|----------------|-----------------------|--|------------|----------------|------------|
| Grid dimension | [mm] | 62 | Conditions | Code | Entry code |
| M | Module no. | 548713 | | | |
| | Series | Standard | | MS | MS |
| | Size | 6 | | 6 | 6 |
| | Function | Soft-start and quick exhaust valve | | -SV | -SV |
| | Pneumatic connection | Female thread G1/2 | | -1/2 | |
| | | Connecting plate G1/4 | | -AGB | |
| | | Connecting plate G3/8 | | -AGC | |
| | | Connecting plate G1/2 | | -AGD | |
| | | Connecting plate G3/4 | | -AGE | |
| | | Connecting plate NPT1/4 | | -AQN | |
| | | Connecting plate NPT3/8 | | -AQP | |
| | | Connecting plate NPT1/2 | | -AQR | |
| | | Connecting plate NPT3/4 | | -AQS | |
| | Performance Level | Category 3, 2-channel, to EN ISO 13849-1 | | -D | -D |
| | Supply voltage | 24 V DC (pin allocation to EN 175301) | | -10V24 | |
| | | 24 V DC, M12x1 to ISO 20401 suitable to EN 61076-2-101 | | -10V24P | |
| | Connection technology | 2 proximity sensors SMT with cable plug connector M8x1, 3-pin, rotatable thread, cable length 0.3 m) | | -2M8 | |
| | | 2 proximity sensors SMT with cable (plug connector M12x1, 3-pin, rotatable thread, cable length 0.3 m) | | -2M12 | |
| | | 2 proximity sensors SMT with cable (open end, 3-wire, cable length 5 m) | | -20E | |

Transfer order code

| | | | | | | | |
|---------------|-----------|----------|-------------|----------|----------|----------|----------|
| 548713 | MS | 6 | - SV | - | D | - | - |
|---------------|-----------|----------|-------------|----------|----------|----------|----------|

Soft-start and quick exhaust valves MS6-SV-D, MS series

Ordering data – Modular products

| Options | | | | | | |
|------------------|----------|--|----------------------------------|------------------|------------------|----------------|
| Extended sensing | Silencer | Pressure gauge/pressure gauge alternatives | Alternative pressure gauge scale | Type of mounting | UL certification | Flow direction |
| S3 | S0 | AG, A4, RG, AD1 ... AD4 | PSI, MPA | WP, WPM, WPB, WB | UL1 | Z |
| - S3 | - S0 | - AG | | - WPB | | |

| Ordering table | | | | | |
|----------------|--|--|------------|------|------------|
| Grid dimension | [mm] | | Conditions | Code | Entry code |
| 0 | Extended sensing | Additional proximity sensor SMT; required to achieve Performance Level e; port depends on connection technology chosen | | -S3 | |
| | Silencer | Silencer open | | -S0 | |
| | Pressure gauge/pressure gauge alternatives | MS pressure gauge | 1 | -AG | |
| | | Adapter for EN pressure gauge 1/4, without pressure gauge | | -A4 | |
| | | Integrated pressure gauge, red/green scale | 1 | -RG | |
| | | Pressure sensor with LCD display, plug connector M8, 1 switching output PNP, 3-pin | | -AD1 | |
| | | Pressure sensor with LCD display, plug connector M8, 1 switching output NPN, 3-pin | | -AD2 | |
| | | Pressure sensor with LCD display, plug connector M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA | | -AD3 | |
| | | Pressure sensor with LCD display, plug connector M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA | | -AD4 | |
| | Alternative pressure gauge scale | psi | 2 | -PSI | |
| | | MPa | 2 | -MPA | |
| | Type of mounting | Mounting bracket standard design | | -WP | |
| | | Mounting bracket for attaching the service units | 3 | -WPM | |
| | | Mounting bracket for large wall gap | | -WPB | |
| | | Mounting bracket centrally at rear (wall mounting top and bottom), connecting plates not required | | -WB | |
| | UL certification | cULus, ordinary location for Canada and USA | | -UL1 | |
| | Flow direction | Flow direction from right to left | | -Z | |

- 1 **AG, RG** Pressure gauge scale in bar
- 2 **PSI, MPA** Only in combination with pressure gauge AG or RG.
With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar
- 3 **WPM** Only with connecting plates AGB, AGC, AGD, AGE, AQN, AQP, AQR or AQS


Transfer order code

- [] - [] - [] - [] - [] - [] - []

Soft-start and quick exhaust valves MS6-SV-E, MS series

Peripherals overview

Soft-start and quick exhaust valve MS6-SV-E

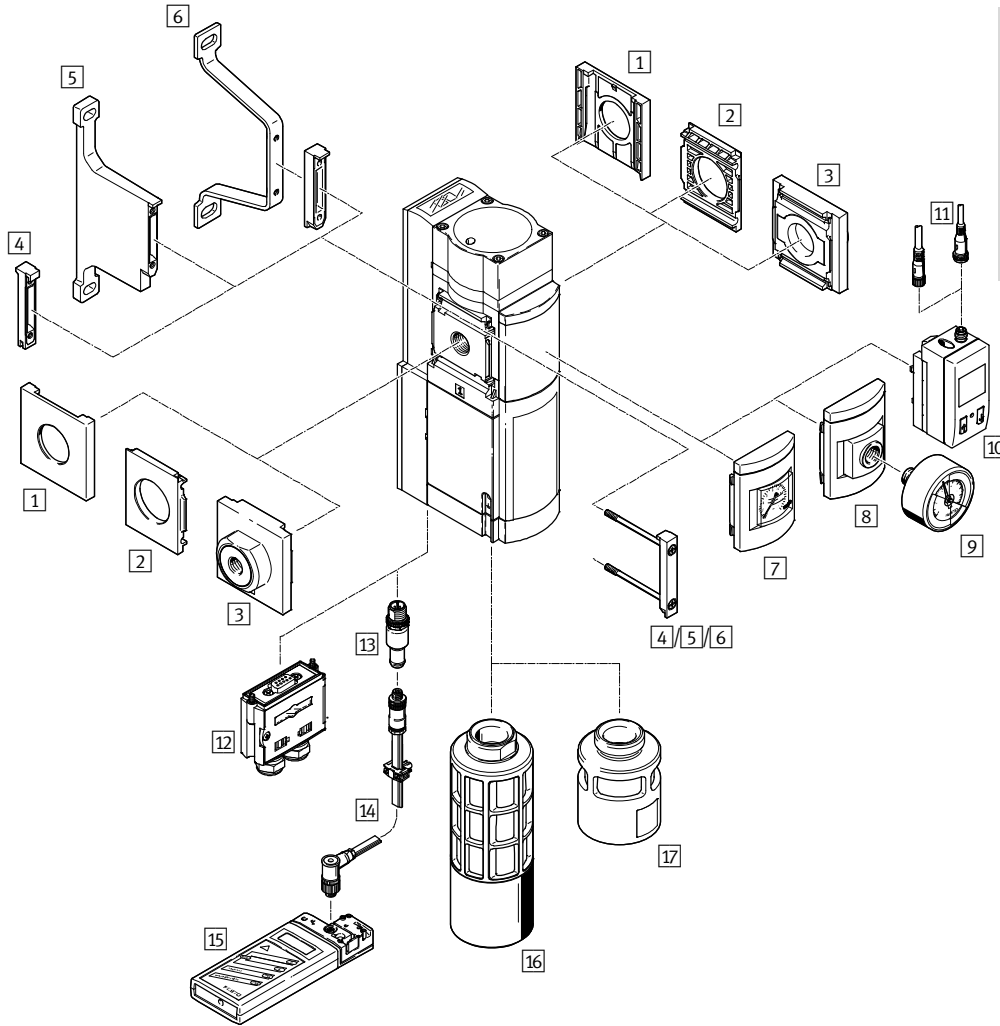

Note

Additional accessories:

- Module connector for combination with size MS4/MS6 or size MS9 → Internet: amv, rmv, armv
- Adapter plate for mounting on profiles → Internet: ipm-80, ipm-40-80, ipm-80-80

Soft-start and quick exhaust valves MS6-SV-E, MS series

Peripherals overview

| Mounting attachments and accessories | | | | | | |
|--------------------------------------|--|-------------------------------|--------------------------|-------------------------------|--------------------------|-----------------|
| | | Individual device | | Combination | | → Page/Internet |
| | | Without connect- ing plate | With connecting plate | Without connect- ing plate | With connecting plate | |
| 1 | Cover cap MS6-END | - | - | ■ | - | ms6-end |
| 2 | Mounting plate MS6-AEND | ■ ¹⁾ | - | ■ ¹⁾ | - | ms6-aend |
| 3 | Connecting plate-SET MS6-AG... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-ag |
| | Connecting plate-SET MS6-AQ... | - | ■ ¹⁾ | - | ■ ¹⁾ | ms6-aq |
| 4 | Module connector MS6-MV | - | - | ■ | ■ | ms6-mv |
| 5 | Mounting bracket MS6-WPB | ■ | ■ | ■ | ■ | ms6-wpb |
| 6 | Mounting bracket MS6-WPE | ■ | ■ | ■ | ■ | ms6-wpe |
| 7 | MS pressure gauge AG/RG | ■ | ■ | ■ | ■ | 44 |
| 8 | Adapter plate for EN pressure gauge 1/4 A4 | ■ | ■ | ■ | ■ | 44 |
| 9 | Pressure gauge MA | ■ | ■ | ■ | ■ | 61 |
| 10 | Pressure sensor with LCD display AD1 ... AD4 | ■ | ■ | ■ | ■ | 44 |
| 11 | Connecting cable NEBU-M8...-LE3/NEBU-M12...-LE4 | ■ | ■ | ■ | ■ | 61 |
| 12 | Multi-pin plug socket NECA | ■ | ■ | ■ | ■ | 56 |
| 13 | AS-i configuration plug CACC | ■ | ■ | ■ | ■ | 59 |
| 14 | Addressing cable KASI-ADR | ■ | ■ | ■ | ■ | kasi-asi |
| 15 | Addressing device ASI-PRG-ADR | ■ | ■ | ■ | ■ | asi-prg-adr |
| 16 | Silencer UOS-1 | ■ | ■ | ■ | ■ | 58 |
| 17 | Silencer UOS-1-LF | ■ | ■ | ■ | ■ | 58 |

1) Module connector MS6-MV or mounting bracket MS6-WPB/WPE is required for mounting.

Soft-start and quick exhaust valves MS6-SV-E, MS series

FESTO

Type codes

| | | MS | 6 | - | SV | - | 1/2 | - | E | - | 10V24 | - | SO | - | AG |
|---|---|----|---|---|----|---|-----|---|---|---|-------|---|----|---|----|
| Series | | | | | | | | | | | | | | | |
| MS | Standard service unit | | | | | | | | | | | | | | |
| Size | | | | | | | | | | | | | | | |
| 6 | Grid dimension 62 mm | | | | | | | | | | | | | | |
| Service function | | | | | | | | | | | | | | | |
| SV | Soft-start and quick exhaust valve | | | | | | | | | | | | | | |
| Pneumatic connection | | | | | | | | | | | | | | | |
| 1/2 | Female thread G1/2 | | | | | | | | | | | | | | |
| Performance level | | | | | | | | | | | | | | | |
| E | Category 4, 2-channel with self-monitoring, to EN ISO 13849-1 | | | | | | | | | | | | | | |
| Supply voltage | | | | | | | | | | | | | | | |
| 10V24 | 24 V DC | | | | | | | | | | | | | | |
| ASIS | 22 ... 31.6 V DC, AS-i Safety at Work, SPEC3.0 Profile 7.5.5 | | | | | | | | | | | | | | |
| Silencer | | | | | | | | | | | | | | | |
| | Without silencer | | | | | | | | | | | | | | |
| SO | Open silencer | | | | | | | | | | | | | | |
| Pressure gauge/pressure gauge alternatives | | | | | | | | | | | | | | | |
| AG | MS pressure gauge | | | | | | | | | | | | | | |
| AD1 | Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin (only with supply voltage 10V24) | | | | | | | | | | | | | | |


Additional variants can be ordered using the modular product system → 44

- Pneumatic connection
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Multi-pin plug socket
- Type of mounting
- UL certification
- Flow direction

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

Function



- - Flow rate
4,300 l/min
- - Temperature range
-10 ... +50 °C
- - Operating pressure
3.5 ... 10 bar
- - www.festo.com



The electro-pneumatic soft-start and quick exhaust valve is used to reduce pressure quickly and reliably and to build up pressure gradually in industrial pneumatic systems and terminals. The device is a self-testing, redundant mechatronic system conforming to the

requirements of EN ISO 13849-1. The safety-related pneumatic protection objective of safe venting is also guaranteed in the event of faults inside the valve (e.g. due to wear, contamination, electronic faults). Thanks to the 2-channel design and its monitoring, the device fulfils controller category 3

and 4 requirements. This enables a performance level of max. "e" to be attained. The device receives the secure enable signals (EN1/EN2) via the electrical connection (multi-pin plug socket NECA Sub-D, 9-pin or AS-i connecting cable). The signals in question come

from commercially available electronic or electromechanical safety switching devices which monitor the protective equipment of the machine (e.g. emergency stop, light curtain, electrical door switch of a protective enclosure, etc.).

Note
The MS6-SV-...-E-10V24 should only be used in combination with the multi-pin plug socket NECA approved for it. The multi-pin plug socket can be ordered via the modular product system (MP... → 44) or as an accessory (NECA → 56).

Note
To avoid back pressures, it is recommended that the device be operated together with the silencer UOS-1. The silencer can be ordered via the modular product system (SO → 44) or as an accessory (UOS-1 → 58).

Note
Only devices that do not impair the pneumatic protective measure – safe venting – may be placed downstream of the MS6-SV-...-E. The MS6-SV-...-E is not permitted for use as a press safety valve.

- Performance level "e"/category 4 according to EN ISO 13849-1
- Conforms to standard IEC 61508
- Switching time delay adjustable via a flow control valve for gradual pressure build-up
- Optional pressure sensor

| Safety characteristics | | |
|--|--|---|
| Type | MS6-SV-...-E-10V24 | MS6-SV-...-E-ASIS |
| Conforms to standard | EN ISO 13849-1 | |
| Safety function | Exhausting | |
| | Avoidance of unexpected start-up (pressurisation) | |
| Performance level (PL) | Exhausting: up to category 4, PL e | |
| | Avoidance of unexpected start-up (pressurisation): up to category 4, PL e | |
| Safety integrity level (SIL) | Exhausting: SIL 3 | |
| | Avoidance of unexpected start-up (pressurisation): SIL 3 | |
| Note on forced dynamisation | Switching frequency min. 1/month | |
| Certificate issuing authority ¹⁾ | IFA 1001180 | TÜV Nord, Registration no. 44 799 12 556236 000 |
| CE marking (see declaration of conformity) ¹⁾ | To EU Machinery Directive | |
| | To EU EMC Directive | |
| Shock resistance | Shock test with severity level 2 according to FN 942017-5 and EN 60068-2-27 | |
| Vibration resistance | Transport application test with severity level 2 according to FN 942017-4 and EN 60068-2-6 | |

1) Additional information www.festo.com/sp → Certificates.

Note on forced dynamisation: switching frequency min. 1/month
The mechanical system is not tested in the controlled (i.e. pressurised) state. If the process-related switching frequency (safe exhausting) is less than once a month, the machine's operator has to carry out a forced switch off.

- Additional functions of MS6-SV-...-E-ASIS:**
- Integrated pressure sensors via AS-i protocol
 - Pressure monitoring (under/over-shooting)

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data



| Operational principle of the multi-pin plug socket NECA | | | | |
|---|------|--|--|---|
| Status of enable signal | | Status of MS6-SV-...-E-10V24 with multi-pin plug | | |
| EN1 | EN2 | NECA-...- MP1 | NECA-...- MP3 | NECA-...- MP5 |
| 0 V | 0 V | Unpressurized | MS6-SV-...-E-10V24 goes into the fault mode. | MS6-SV-...-E-10V24 does not go into the fault mode, but remains in the safe, unpressurized status. Note: Cross-circuit detection and error detection/evaluation via external controller necessary. |
| 0 V | 24 V | MS6-SV-...-E-10V24 goes into the fault mode. | Pressurized | Pressurized |
| 24 V | 24 V | Pressurized | MS6-SV-...-E-10V24 goes into the fault mode. | MS6-SV-...-E-10V24 does not go into the fault mode, but remains in the safe, unpressurized status. Note: Cross-circuit detection and error detection/evaluation via external controller necessary. |
| 24 V | 0 V | MS6-SV-...-E-10V24 goes into the fault mode. | Unpressurized | Unpressurized |

MS6-SV-...-E-10V24 with multi-pin plug socket NECA

NECA-...- MP1

24 V

GND

MS6-SV

NECA-...-MP1

EN1

EN2

– Static enable signals (EN1 = 24 V, EN2 = 24 V).

– Clocked enable signals (EN1 = 0 ... 24 V, EN2 = 0 ... 24 V) for cross-circuit detection. Cross-circuit detection with clock signals is in principle carried out by the safety switching device/safety PLC used.

Note

Given the fact that clock outputs from different controller manufacturers are not standardised, their usability must be checked in each case. If the clock pulse is outside of the described limits, this is recognised by the MS6-SV-...-E-10V24 as an error and a safe switch-off is performed.

EN1

EN2

24 V

0 V

24 V

0 V

< 75 ms

≥ 300 ms

< 12 ms

> 5 ms

< 75 ms

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

| | |
|---|--|
| MS6-SV...-E-10V24 with multi-pin plug socket NECA | |
| NECA...- MP3 | |
| | <p>- Note</p> <p>The multi-pin plug socket NECA-S1G9-P9-MP3 is intended for conventional circuitry with electromechanical safety relays. If problems arise in use with bipolar semiconductor outputs, use the multi-pin plug socket NECA-S1G9-P9-MP5.</p> |
| <ul style="list-style-type: none"> - Static enable signals with opposite potentials. - The time delay of the level change of the enable signals is monitored. - Behaviour on detection of a cross circuit: <ul style="list-style-type: none"> - MS6-SV...-E-10V24 in the exhausted status: remains in the safe status and goes into the fault mode. - MS6-SV...-E-10V24 in the pressurized status: goes into the safe status and goes into the fault mode. | |
| NECA...- MP5 | |
| | <p>- Note</p> <p>A cross circuit between the enable signals (EN1/EN2) is not detected and does not cause an error response. The system can be pressurized only when the enable signals are applied correctly.</p> |
| <ul style="list-style-type: none"> - Static enable signals with opposite potentials. - The time delay of the level change of the enable signals is not monitored. - Behaviour on detection of a cross circuit (through upstream safety switching device/safety PLC): <ul style="list-style-type: none"> - MS6-SV...-E-10V24 in the exhausted status: remains in the safe status and does not go into the fault mode. - MS6-SV...-E-10V24 in the pressurized status: goes into the safe status and does not go into the fault mode. - Enable signal are galvanically separated from the supply voltage. | <p>- Note</p> <p>The time delay between EN1 and EN2 must be automatically determined. The duration of the delay is not evaluated.</p> |

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

FESTO

MS6-SV-...-E-ASIS in the actuator-sensor interface (AS-i)

The actuator-sensor interface (AS-i) is a system for networking sensors and actuators on the lowest level of the automation hierarchy. It is a non-proprietary, open bus system and enables transfer of data and energy on just one line. This simple method permits an efficient configuration with simultaneously reliable performance. The network topology of the AS-i system can be expanded as desired without any difficulty.

An AS-i network consists of a control

unit, a so-called master and the associated sensor and actuator components, namely the slaves. The master cyclically polls all configured slaves and exchanges input and output data with them. A telegram consists of 4 bits of user data. The master communicates with the slaves via a serial transmission protocol.

AS-i Safety at Work is a certified standard that enables safety-related components to be used in the AS-i system.


The safe AS-i system is designed for

safety applications up to category 4 according to EN ISO 13849-1 PL "e". Mixed operation of standard components and safety-oriented components is possible. The AS-interface master considers the safety-oriented slaves just like all other slaves and incorporates them into the network. The transmission protocol and the cables in the AS-i system are laid out so that they are also capable of transmitting safety-oriented telegrams.

The AS-i safety monitor is the central

safe component and monitors the safety-oriented slaves assigned to it within an AS-i system. The safety function is ensured via additional signal transmission between the safety-oriented slaves and the AS-i safety monitor. This transmission takes place with a special safety protocol.

In the case of a stop request or defect, the AS-i safety monitor in protection mode reliably switches the system off with a maximum reaction time of 40 ms.

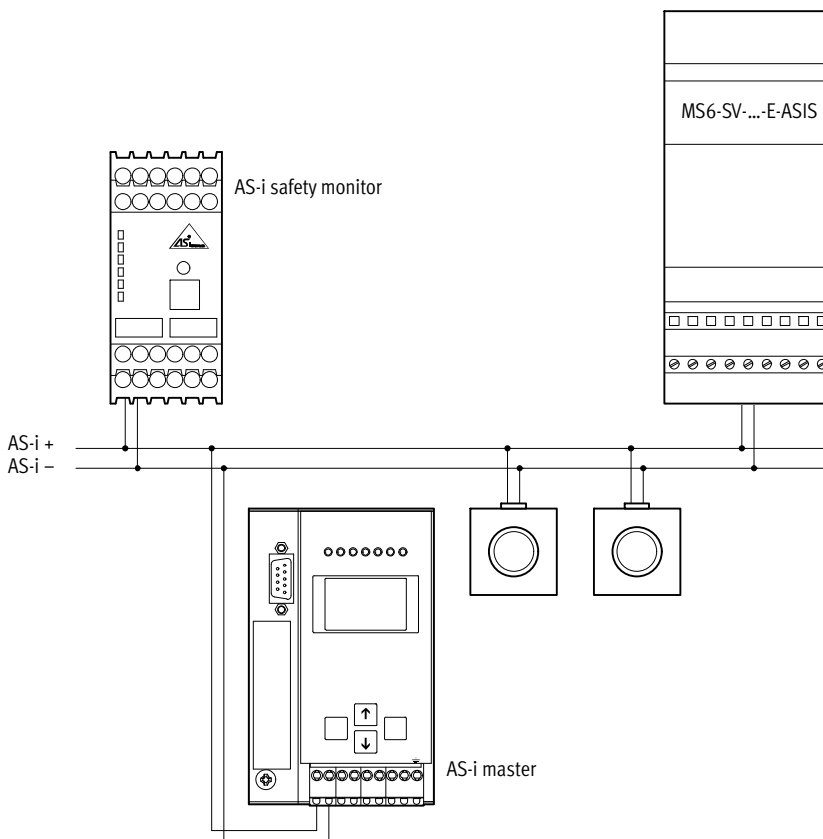

Soft-start and quick exhaust valves MS6-SV-E, MS series

FESTO

Technical data

| General technical data | |
|----------------------------|---|
| Pneumatic connection 1, 2 | |
| Female thread | G $\frac{1}{2}$ |
| Connecting plate AG... | G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$ or G $\frac{3}{4}$ |
| Connecting plate AQ... | NPT $\frac{1}{4}$, NPT $\frac{3}{8}$, NPT $\frac{1}{2}$ or NPT $\frac{3}{4}$ |
| Pneumatic connection 3 | G1 |
| Actuation type | Electric |
| Design | Piston seat |
| Type of mounting | Via accessories In-line installation |
| Mounting position | Any |
| Pressure indicator | Via pressure sensor for displaying output pressure via LCD display and electrical output Via pressure gauge for displaying output pressure Via pressure gauge with red/green scale for displaying output pressure G $\frac{1}{4}$ prepared |
| Position sensing principle | Solenoid piston principle |
| Valve function | 3/2-way valve, closed, single solenoid Soft-start function, adjustable |
| Non-overlapping | No |
| Exhaust function | No flow control |
| Manual override | None |
| Reset method | Mechanical spring |
| Type of control | Piloted |
| Pilot air supply | Internal |
| Sealing principle | Soft |

- Note: This product conforms to ISO 1179-1 and to ISO 228-1

| Flow rate characteristics | |
|---|-------------------------------|
| Pneumatic connection | Female thread G $\frac{1}{2}$ |
| Standard nominal flow rate $q_{nN^{1)}$ [l/min] | |
| In main flow direction 1 \rightarrow 2 | 4,300 |
| Standard flow rate q_N [l/min], $p_2 = 6$ bar | |
| In venting direction 2 \rightarrow 3 | 9,000 ²⁾ |
| C value [l/s*min] | |
| In main flow direction 1 \rightarrow 2 | 19.3 |
| b value | |
| In main flow direction 1 \rightarrow 2 | 0.21 |

1) Measured at $p_1 = 6$ bar and $p_2 = 5$ bar, $\Delta p = 1$ bar

2) Measured with respect to atmosphere with silencer UOS-1

| Electrical data | | |
|---|--------------------------|-------------------|
| Type | MS6-SV-...-E-10V24 | MS6-SV-...-E-ASIS |
| Electrical connection | Sub-D, 9-pin | 2x M12 |
| Nominal operating voltage [V DC] | 24 | - |
| Permissible voltage [%] | ± 10 | - |
| Permissible voltage fluctuations | | |
| Operating voltage range for AS-interface [V DC] | - | 22 ... 31.6 |
| Duty cycle [%] | 100 | |
| Max. switching frequency [Hz] | 1 | |
| Switching time off [ms] | 40 | |
| Switching time on [ms] | 130 | |
| Signal status display | LED and floating contact | LED and via AS-i |
| Protection class | IP65 with plug socket | |

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

FESTO

| AS-i Safety-specific data | |
|-----------------------------|---|
| Type | MS6-SV-...-E-ASIS |
| Fieldbus interface | Socket M12 (AS-i Out) and plug M12 (AS-i In) |
| LED displays | AS-i and status |
| Device-specific diagnostics | Inputs for cyclical digital data (exhausted, pressurised, fault) Cyclical analogue values (supply pressure p1, output pressure p2) Acyclical values (counter, pressure monitoring, fault, switching frequency exceeded, status) |
| Product identification | IO code: 0x7 Profile: 7.5.5 ID code: 0x5 ID1: 0xF ID2: 0x5 |
| Vendor ID AS-interface | 0x014D |
| Device ID AS-interface | 0x03A6 |
| Addressing range | Standard slave: 1 ... 31 |

| Operating and environmental conditions | | |
|--|--|-------------------|
| Type | MS6-SV-...-E-10V24 | MS6-SV-...-E-ASIS |
| Operating pressure [bar] | 3.5 ... 10 | 3.5 ... 10 |
| Operating medium | Compressed air according to ISO 8573-1:2010 [7:4:4] | |
| Note on operating/pilot medium | Lubricated operation possible (in which case lubricated operation will always be required) | |
| Ambient temperature [°C] | -10 ... +50 (0 ... +50) ¹⁾ | 0 ... +50 |
| Temperature of medium [°C] | -10 ... +50 (0 ... +50) ¹⁾ | 0 ... +50 |
| Storage temperature [°C] | -10 ... +50 (0 ... +50) ¹⁾ | 0 ... +50 |
| Corrosion resistance class CRC ²⁾ | 2 | |
| Noise level [dB(A)] | 75 (with silencer UOS-1) | |
| CE marking (see declaration of conformity) ⁴⁾ | To EU EMC Directive ³⁾ | |
| | To EU Machinery Directive | |
| Certification (variant UL1) | cULus recognized (OL) | |
| Certification | RCM Mark | |

1) With pressure sensor AD...

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

3) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → Certificates.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

4) Additional information www.festo.com/sp → Certificates.

| Weight [g] | |
|--|-------|
| Soft-start and quick exhaust valve | 2,000 |
| Soft-start and quick exhaust valve with silencer UOS-1 | 2,200 |


| Materials | |
|-------------------|----------------------------|
| Housing | Die-cast aluminium |
| Piston rod | High-alloy stainless steel |
| Seals | NBR |
| Note on materials | RoHS-compliant |

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data

Switching point

Pressure p as a function of time t

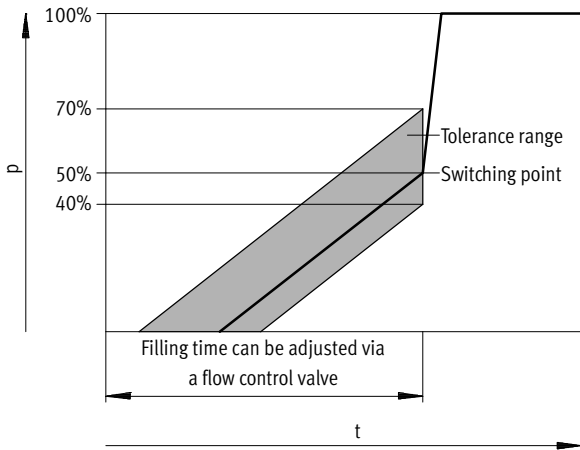

Note


The +20%/−10% switching point tolerance refers to the operating pressure p₁.
Example: A switching point from 1.6 bar to 2.8 bar is permissible at an operating pressure of 4 bar.

Dimensions – Basic design

Download CAD data → www.festo.com

With supply voltage 10V24,
with female thread 1/2, with cover plate

With supply voltage ASIS,
with female thread 1/2, with cover plate

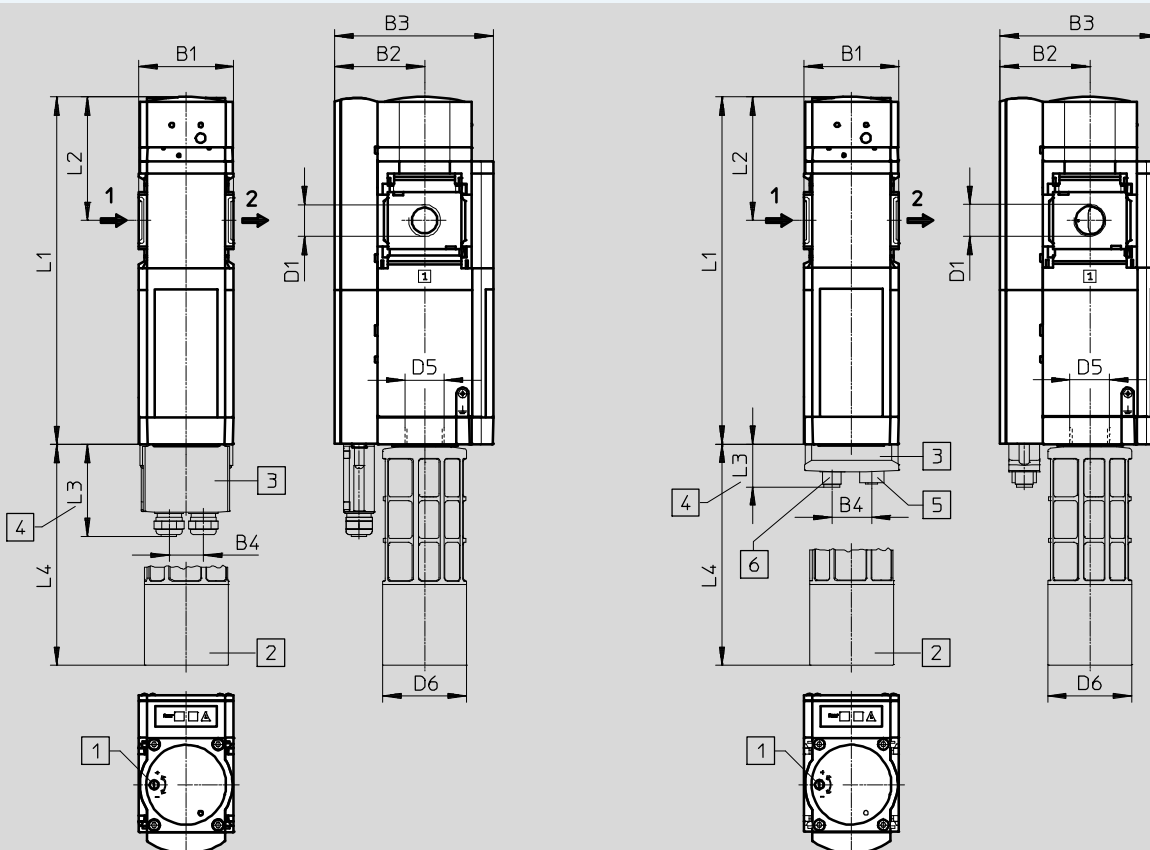

- 1 Regulating screw for flow control valve
 - 2 Silencer UOS-1
 - 3 Multi-pin plug socket NECA or AS-i configuration plug CACC
 - 4 Dimension without cable
 - 5 M12 socket, 5-pin
 - 6 M12 pin, 5-pin
- Flow direction

| Type | B1 | B2 | B3 | B4 | D1 | D5 | D6 | L1 | L2 | L3 | L4 |
|--------------------|----|----|-----|----|------|----|----|-----|----|----|-----|
| MS6-SV-1/2-E-10V24 | 62 | 59 | 104 | 23 | G1/2 | G1 | 55 | 228 | 81 | 61 | 145 |
| MS6-SV-1/2-E-ASIS | | | | 26 | | | | | | 28 | |

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS6-SV-E, MS series

Technical data


FESTO

Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → www.festo.com

Integrated MS pressure gauge with standard scale AG or red/green scale RG, display unit [bar]

Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

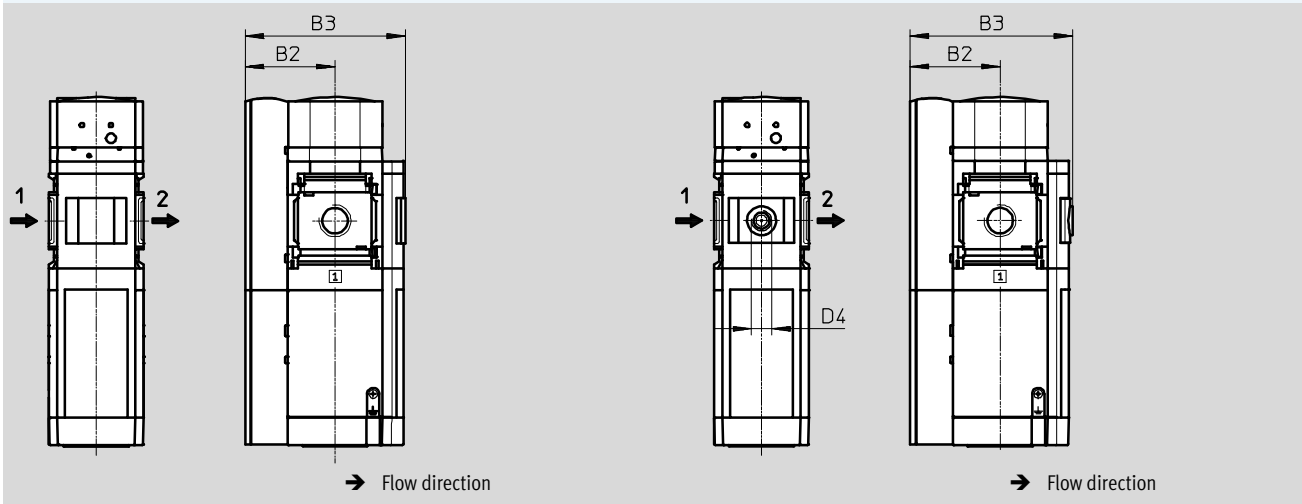

| Type | B2 | B3 | D4 |
|---------------------|----|-------|------|
| MS6-SV-...-E-...-AG | 59 | 105 | - |
| MS6-SV-...-E-...-RG | 59 | 106.5 | - |
| MS6-SV-...-E-...-A4 | 59 | 106.5 | G1/4 |


Note: This product conforms to ISO 1179-1 and to ISO 228-1

Dimensions – Pressure gauge/pressure gauge alternatives

Download CAD data → www.festo.com

Pressure sensor with LCD display AD1 ... AD4

Technical data → Internet: sde1

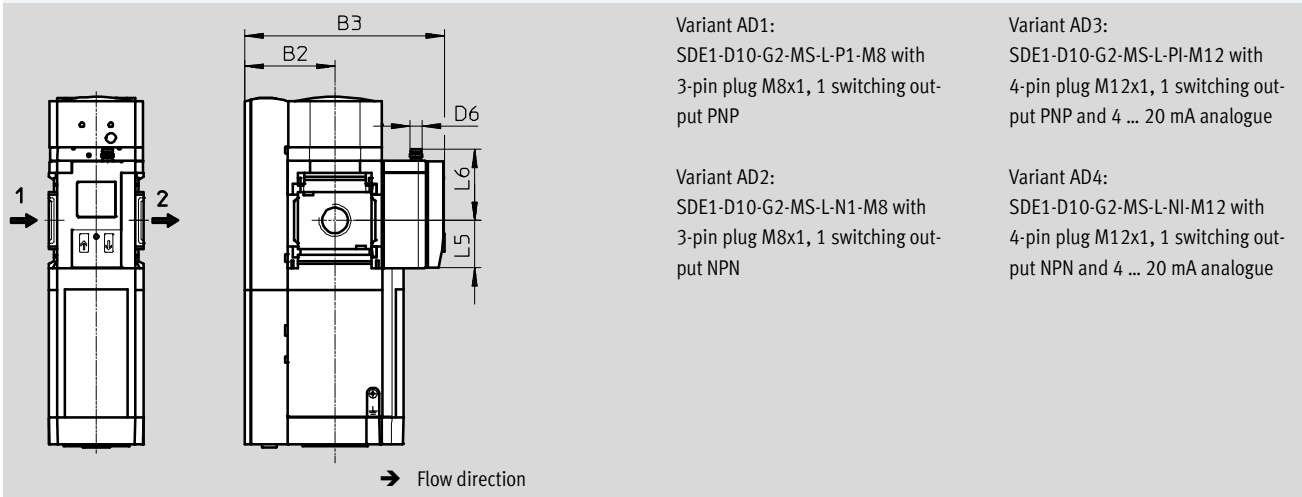

Variant AD1:
SDE1-D10-G2-MS-L-P1-M8 with
3-pin plug M8x1, 1 switching out-
put PNP

Variant AD3:
SDE1-D10-G2-MS-L-PI-M12 with
4-pin plug M12x1, 1 switching out-
put PNP and 4 ... 20 mA analogue

Variant AD2:
SDE1-D10-G2-MS-L-N1-M8 with
3-pin plug M8x1, 1 switching out-
put NPN

Variant AD4:
SDE1-D10-G2-MS-L-NI-M12 with
4-pin plug M12x1, 1 switching out-
put NPN and 4 ... 20 mA analogue

| Type | B2 | B3 | D6 | L5 | L6 |
|--------------------------|----|-----|-------|------|------|
| MS6-SV-...-E-...-AD1/AD2 | 59 | 131 | M8x1 | 31.2 | 46.7 |
| MS6-SV-...-E-...-AD3/AD4 | | | M12x1 | | 55.8 |

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS6-SV-E, MS series

FESTO

Technical data

| Ordering data – Supply voltage 10V24 | | | | | |
|---|------------|------------------|------------------------|---------------|--------------------------|
| Size | Connection | Without silencer | | With silencer | |
| | | Part No. | Type | Part No. | Type |
| MS pressure gauge, display unit [bar] | | | | | |
| MS6 | G1/2 | 548715 | MS6-SV-1/2-E-10V24-AG | 548717 | MS6-SV-1/2-E-10V24-SO-AG |
| Pressure sensor with LCD display, plug M8, PNP, 3-pin | | | | | |
| MS6 | G1/2 | 562580 | MS6-SV-1/2-E-10V24-AD1 | - | |

| Ordering data – Supply voltage ASIS | | | | | |
|---------------------------------------|------------|------------------|----------------------|---------------|-------------------------|
| Size | Connection | Without silencer | | With silencer | |
| | | Part No. | Type | Part No. | Type |
| MS pressure gauge, display unit [bar] | | | | | |
| MS6 | G1/2 | 8001480 | MS6-SV-1/2-E-ASIS-AG | 8001481 | MS6-SV-1/2-E-ASIS-SO-AG |

Soft-start and quick exhaust valves MS6-SV-E, MS series



Ordering data – Modular products

M Mandatory data →

| Module No. | Series | Size | Function | Pneumatic connection | Performance level | Supply voltage |
|-------------------------|-----------|----------|-------------|----------------------|-------------------|----------------|
| 548713 | MS | 6 | SV | 1/2, AG..., AQ... | E | 10V24, ASIS |
| Ordering example | | | | | | |
| 548713 | MS | 6 | - SV | - AGB | - E | - 10V24 |

Ordering table

| Grid dimension | [mm] | 62 | Conditions | Code | Enter code |
|----------------------|---|---------------|------------|---------------|------------|
| M Module No. | | 548713 | | | |
| Series | Standard | | | MS | MS |
| Size | 6 | | | 6 | 6 |
| Function | Soft-start and quick exhaust valve | | | -SV | -SV |
| Pneumatic connection | Female thread G1/2 | | | -1/2 | |
| | Connecting plate G1/4 | | | -AGB | |
| | Connecting plate G3/8 | | | -AGC | |
| | Connecting plate G1/2 | | | -AGD | |
| | Connecting plate G3/4 | | | -AGE | |
| | Connecting plate NPT1/4 | | | -AQN | |
| | Connecting plate NPT3/8 | | | -AQP | |
| | Connecting plate NPT1/2 | | | -AQR | |
| | Connecting plate NPT3/4 | | | -AQS | |
| Performance level | Category 4, 2-channel with self-monitoring, to EN ISO 13849-1 | | | -E | -E |
| Supply voltage | 24 V DC (pin allocation to EN 175301) | | | -10V24 | |
| | 22 ... 31.6 V DC, AS-i Safety at Work, SPEC3.0 Profile 7.5.5 | | | -ASIS | |

Transfer order code

| | | | | | | |
|---------------|-----------|----------|-------------|----------|----------|----------|
| 548713 | MS | 6 | - SV | - | E | - |
|---------------|-----------|----------|-------------|----------|----------|----------|

Soft-start and quick exhaust valves MS6-SV-E, MS series

Ordering data – Modular products

| Options | | | | | | |
|----------|---|---------------------------------------|--------------------------|------------------|------------------|----------------|
| Silencer | Pressure gauge/ pressure gauge alternatives | Alternative pres- sure gauge scale | Multi-pin plug socket | Type of mounting | UL certification | Flow direction |
| SO | AG, A4, RG, AD1 ... AD4 | PSI, MPA | MP1, MP3, MP5 | WPB | UL1 | Z |
| - SO | - AG | - | - MP1 | - WPB | - | - |

| Ordering table | | | | | |
|---|------|--|-----------------|------|---------------|
| Grid dimension | [mm] | 62 | Condi- tions | Code | Enter code |
| 0 Silencer | | Open silencer | | -SO | |
| Pressure gauge/pressure gauge alternatives | | MS pressure gauge | 1 | -AG | |
| | | Adapter plate for EN pressure gauge 1/4, without pressure gauge | 2 | -A4 | |
| | | Integrated pressure gauge, red/green scale | 1 | -RG | |
| | | Pressure sensor with LCD display, plug M8, 1 switching output PNP, 3-pin | 2 | -AD1 | |
| | | Pressure sensor with LCD display, plug M8, 1 switching output NPN, 3-pin | 2 | -AD2 | |
| | | Pressure sensor with LCD display, plug M12, 1 switching output PNP, 4-pin, analogue output 4 ... 20 mA | 2 | -AD3 | |
| | | Pressure sensor with LCD display, plug M12, 1 switching output NPN, 4-pin, analogue output 4 ... 20 mA | 2 | -AD4 | |
| Alternative pressure gauge scale | | psi | 3 | -PSI | |
| | | MPa | 3 | -MPA | |
| Multi-pin plug socket | | Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 24 V, EN2 = 24 V) | 2 | -MP1 | |
| | | Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), short-circuit detection possible | 2 | -MP3 | |
| | | Sub-D, 9-pin, screw terminal, without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), galvanic isolation of the enable signals from the supply voltage | 2 | -MP5 | |
| Type of mounting | | Mounting bracket for large wall gap | | -WPB | |
| UL certification | | cULus, ordinary location for Canada and USA | | -UL1 | |
| Flow direction | | Flow direction from right to left | | -Z | |

- 1 AG, RG Pressure gauge scale in bar
- 2 A4, AD1, AD2, AD3, AD4, MP1, MP3, MP5
Now with supply voltage ASIS.

- 3 PSI, MPA Only in combination with pressure gauge AG or RG.
With pressure gauge RG: PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar


Transfer order code

- - - - - - -

Soft-start and quick exhaust valves MS9-SV-C, MS series

Peripherals overview


Soft-start and quick exhaust valve MS9-SV-C

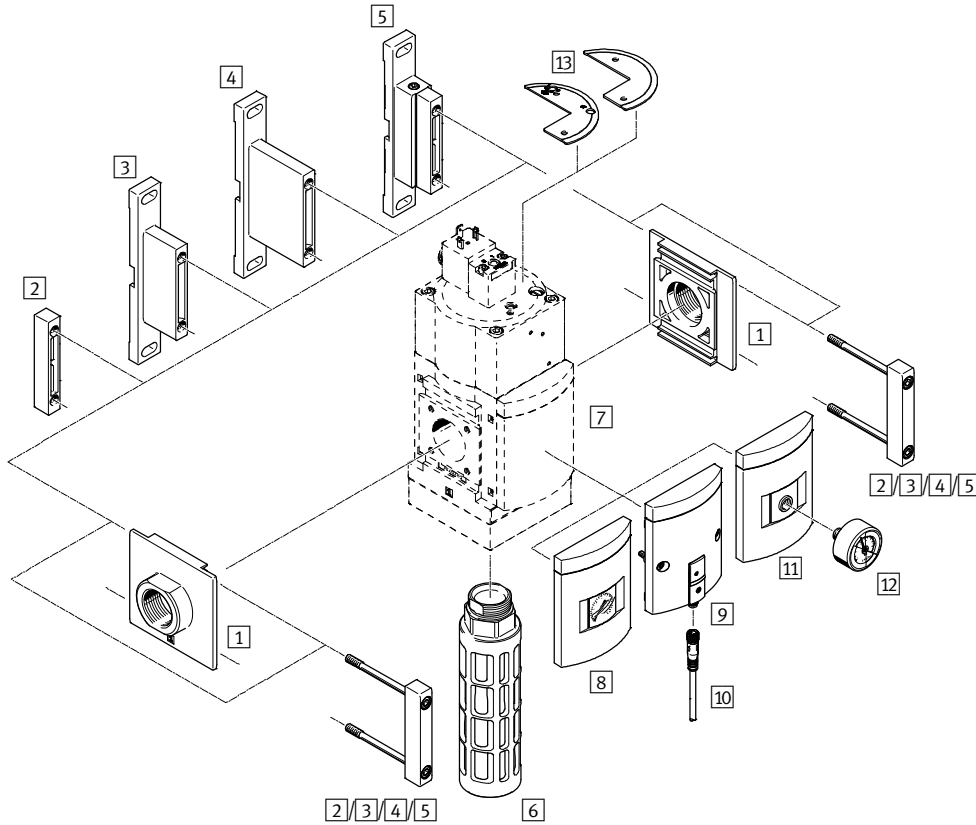

Note
 Additional accessories:
 - Module connector for combination with size MS6, MS9 or MS12
 → Internet: rmv, armv

Supply voltage
 V24/V110/V230

Supply voltage
 10V24P

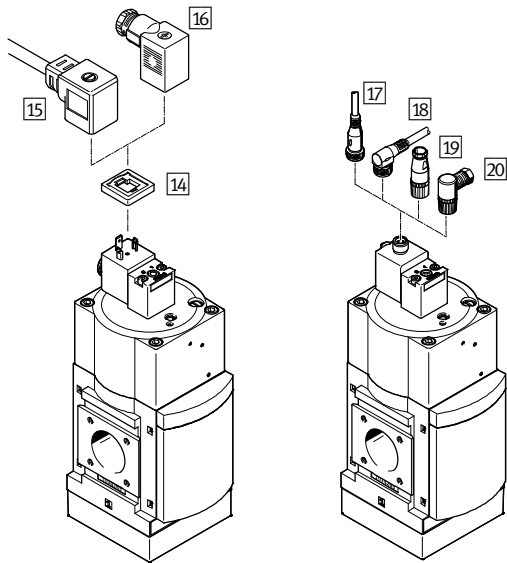


Soft-start and quick exhaust valves MS9-SV-C, MS series

Peripherals overview

| Mounting attachments and accessories | | | | | |
|--------------------------------------|---|-------------------------------------|--------------------------------------|---|---------------------|
| | | Individual device | | Combination | → Page/ Internet |
| | | With female thread 3/4/1/N3/4/N1 | With connecting plate AG.../AQ... | Module without connecting thread, without connecting plate G/NG | |
| 1 | Connecting plate-SET MS9-AG... | - | ■ | ■ | ms9-ag |
| | Connecting plate-SET MS9-AQ... | - | ■ | ■ | ms9-aq |
| 2 | Module connector MS9-MV | - | - | ■ | ms9-mv |
| 3 | Mounting bracket MS9-WP | ■ | ■ | ■ | ms9-wp |
| 4 | Mounting bracket MS9-WPB | ■ | ■ | ■ | ms9-wp |
| 5 | Mounting bracket MS9-WPM | ■ | ■ | ■ | ms9-wp |
| 6 | Silencer U-1-B | ■ | ■ | ■ | 60 |
| 7 | Cover plate VS | ■ | ■ | ■ | 54 |
| 8 | MS pressure gauge AG/RG | ■ | ■ | ■ | 54 |
| 9 | Pressure sensor with operational status indicator AD7 ... AD10 | ■ | ■ | ■ | 54 |
| 10 | Connecting cable NEBU-M8...-LE3 | ■ | ■ | ■ | 61 |
| 11 | Adapter plate for EN pressure gauge 1/4 A4 | ■ | ■ | ■ | 54 |
| 12 | Pressure gauge MA | ■ | ■ | ■ | 61 |
| 13 | Cover MS9-SV-MH/MK | ■ | ■ | ■ | 59 |
| 14 | Illuminating seal MC-LD | ■ | ■ | ■ | 61 |
| 15 | Connecting cable KMC | ■ | ■ | ■ | 60 |
| 16 | Plug socket MSSD-C | ■ | ■ | ■ | 60 |
| 17 | Connecting cable NEBU-M12G5 | ■ | ■ | ■ | 61 |
| 18 | Connecting cable NEBU-M12W5 | ■ | ■ | ■ | 61 |
| 19 | Sensor socket SIE-GD | ■ | ■ | ■ | 61 |
| 20 | Angled socket SIE-WD | ■ | ■ | ■ | 61 |

Soft-start and quick exhaust valves MS9-SV-C, MS series

Type codes

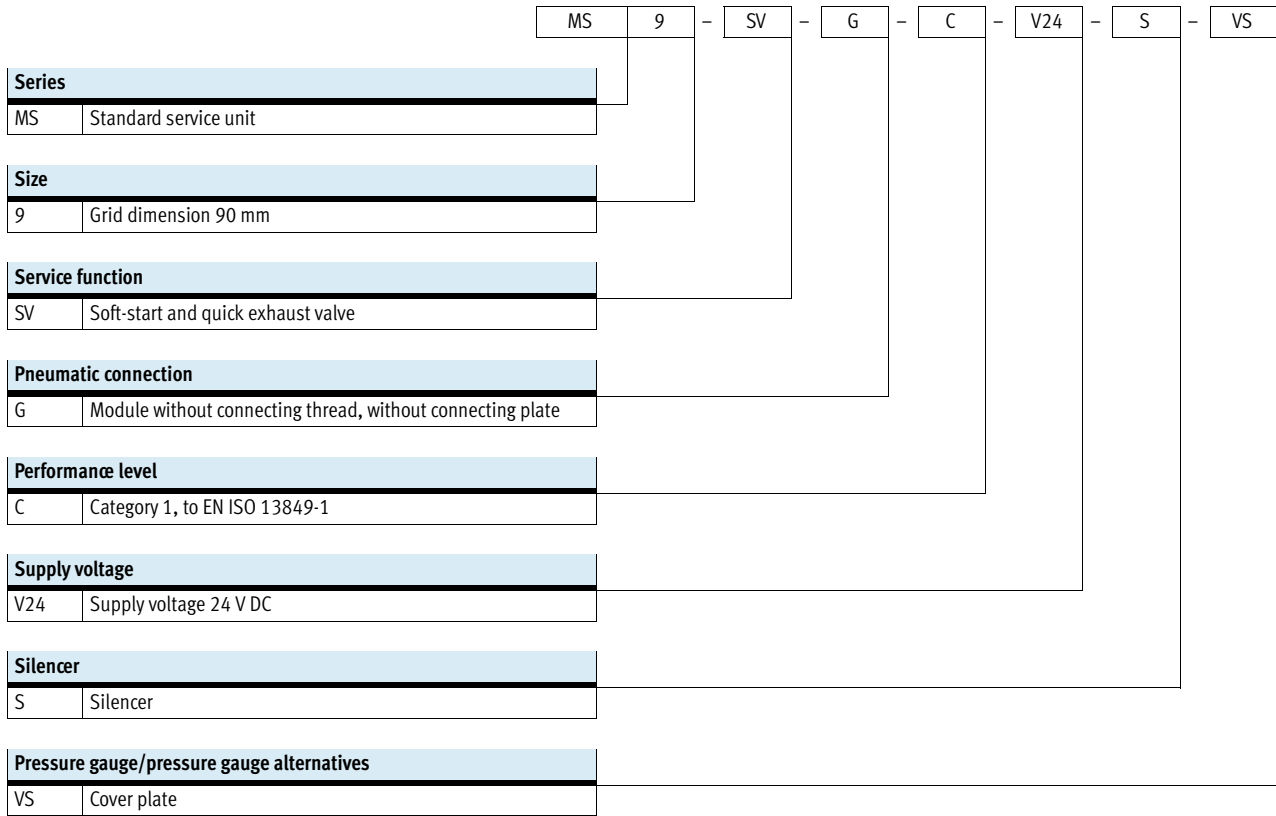


Additional variants can be ordered using the modular product system → 54

- Pneumatic connection
- Supply voltage
- Pressure gauge/pressure gauge alternatives
- Alternative pressure gauge scale
- Type of mounting
- Tamper protection
- UL certification
- Flow direction

Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

Function



- - Flow rate
8,300 ... 16,550 l/min
- - Temperature range
0 ... +60 °C
- - Operating pressure
3.5 ... 16 bar
- - www.festo.com



Electro-pneumatic soft-start and quick exhaust valve for gradual pressurisation and quick exhausting of system components (single channel).

The main flow control valve in the end cap permits a gradual build-up of output pressure p2. Once the output pressure p2 has reached the set pressure switchover point (switching pressure), the valve opens and the full operating pressure p1 is present at the output.

- Suitable for applications with high flow rates and restricted space with medium safety requirements up to controller category 1, performance level "c"
- High volumetric flow rate for pressurisation and venting
- The filling flow rate can be set via a flow control valve for gradual pressure build-up
- Adjustable pressure switchover point
- Optional pressure sensor
- Optional cover for the control sections as tamper protection

| Safety characteristics | |
|------------------------|--|
| Conforms to standard | EN ISO 13849-1 |
| Safety function | Venting |
| Performance level (PL) | Venting: up to category 1, PL c |
| Shock resistance | Shock test with severity level 1 according to FN 942017-5 and EN 60068-2-27 |
| Vibration resistance | Transport application test with severity level 1 to FN 942017-4 and EN 60068-2-6 |

| General technical data | |
|---|---|
| Pneumatic connection 1, 2 | |
| Female thread | G3/4, G1, NPT3/4 or NPT1 |
| Connecting plate AG... | G1/2, G3/4, G1, G1 1/4 or G1 1/2 |
| Connecting plate AQ... | NPT1/2, NPT3/4, NPT1, NPT1 1/4 or NPT1 1/2 |
| Module without connecting thread/plate G/NG | - |
| Pneumatic connection 3 | G1 (NPT1) ¹⁾ |
| Actuation type | Electric |
| Design | Piston spool valve |
| Type of mounting | Via accessories In-line installation |
| Mounting position | Any |
| Pressure indicator | Via pressure sensor for displaying output pressure via operational status indicator and electrical output Via pressure gauge for displaying output pressure Via pressure gauge with red/green scale for displaying output pressure G1/4 prepared |
| Valve function | 3/2-way valve, closed, single solenoid Soft-start function, adjustable |
| Exhaust function | No flow control |
| Reset method | Mechanical spring |
| Type of control | Piloted |
| Sealing principle | Soft |

1) Only with N3/4/N1/AQ.../NG without silencer S

- - Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

FESTO

| Electrical data | | |
|-----------------------|-----------------------|---|
| Coil characteristics | V24 | 24 V DC: 8.4 W; permissible voltage fluctuations $\pm 10\%$ |
| | 10V24P | 24 V DC: 2.7 W; permissible voltage fluctuations $\pm 10\%$ |
| | V110 | 110 V AC: 50/60 Hz; pick-up power 14.5 VA; holding power 10.5 VA; permissible voltage fluctuations $\pm 10\%$ |
| | V230 | 230 V AC: 50/60 Hz; pick-up power 14.5 VA; holding power 10.5 VA; permissible voltage fluctuations $\pm 10\%$ |
| Electrical connection | V24, V110, V230 | Plug, square design to EN 175301-803, type A |
| | 10V24P | M12x1, 4-pin, to IEC 61076-2-101, to DESINA |
| Protection class | IP65 with plug socket | |
| Duty cycle | [%] | 100 |

| Flow rate characteristics | | | | | | | |
|---|----------------------------|--------|------------------|---------|---------|---------|---------|
| Pneumatic connection | Female thread | | Connecting plate | | | | |
| | $\frac{3}{4}/N\frac{3}{4}$ | 1/N1 | AGD/AQR | AGE/AQS | AGF/AQT | AGG/AQU | AGH/AQV |
| Standard nominal flow rate $q_{nN}^{1)}$ [l/min] | | | | | | | |
| In main flow direction 1 \rightarrow 2 | 14,150 | 16,460 | 8,300 | 13,250 | 16,340 | 16,550 | 15,910 |
| Standard flow rate q_n [l/min] | | | | | | | |
| For exhaust 6 \rightarrow 0 bar with silencer S | 21,450 | 20,870 | 21,720 | 20,900 | 20,370 | 19,730 | 19,850 |
| C value [l/s*min] | | | | | | | |
| In main flow direction 1 \rightarrow 2 | 57.61 | 69.59 | 31.43 | 54.24 | 68.24 | 68.45 | 66.07 |
| In venting direction 2 \rightarrow 3 | 55.52 | 54.01 | 56.22 | 54.07 | 52.73 | 51.06 | 51.36 |
| b value | | | | | | | |
| In main flow direction 1 \rightarrow 2 | 0.37 | 0.32 | 0.47 | 0.37 | 0.34 | 0.35 | 0.35 |
| In venting direction 2 \rightarrow 3 | 0.49 | 0.46 | 0.60 | 0.49 | 0.47 | 0.45 | 0.44 |

1) Measured at $p_1 = 6$ bar and $p_2 = 5$ bar, $\Delta p = 1$ bar

| Operating and environmental conditions | | | |
|--|--|----------------------------|---------------------------------------|
| Variant | Coil characteristic V24 | Coil characteristic 10V24P | Coil characteristic V110, V230 |
| Operating pressure [bar] | 3.5 ... 16 (3.5 ... 10) ²⁾ | 3.5 ... 10 | 3.5 ... 16 (3.5 ... 10) ²⁾ |
| Operating medium | Compressed air according to ISO 8573-1:2010 [7:4:4] | | |
| Note on operating/pilot medium | Operation with lubricated medium possible (in which case lubricated operation will always be required) | | |
| Ambient temperature [°C] | 0 ... +60 (0 ... +50) ²⁾ | | |
| Temperature of medium [°C] | 0 ... +60 (0 ... +50) ²⁾ | | |
| Storage temperature [°C] | 0 ... +60 (0 ... +50) ²⁾ | | |
| Corrosion resistance class CRC ¹⁾ | 2 | | |
| Noise level ³⁾ [dB(A)] | 93 (with silencer S) | | |
| CE marking (see declaration of conformity) | - | | To EU Low Voltage Directive |
| Certification (variant UL1) | cULus recognized (OL) | | |

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) With pressure sensor AD...
- 3) Venting at 10 bar at a distance of 1 m


| Weight [g] | |
|--|-------|
| Soft-start/quick exhaust valve | 2,970 |
| Soft-start/quick exhaust valve with silencer S | 3,200 |

Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

Materials


Sectional view

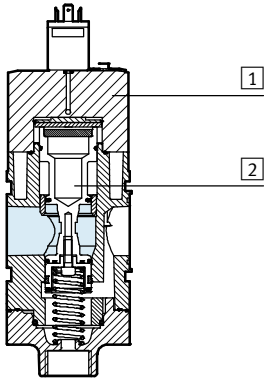

Soft-start and quick exhaust valve

| | | |
|-------------------|--------------|--------------------|
| 1 | Housing | Die-cast aluminium |
| 2 | Piston spool | Brass |
| - | Seals | NBR |
| Note on materials | | RoHS-compliant |

Adjusting elements



- 1 Screw for adjusting the pressure switchover point
- 2 Flow control screw for adjusting the filling time
- 3 Manual override at the soft-start and quick exhaust valve:
 - Detenting/self-resetting as soon as the solenoid coil or manual override at the pilot solenoid valve is actuated.
- 4 Manual override at the pilot solenoid valve:
 - Non-detenting, actuation from above




Dimensions – Basic design

Download CAD data → www.festo.com


Module without connecting thread, without connecting plate G/NG, with cover plate VS

Supply voltage V24/V110/V230

Supply voltage 10V24P

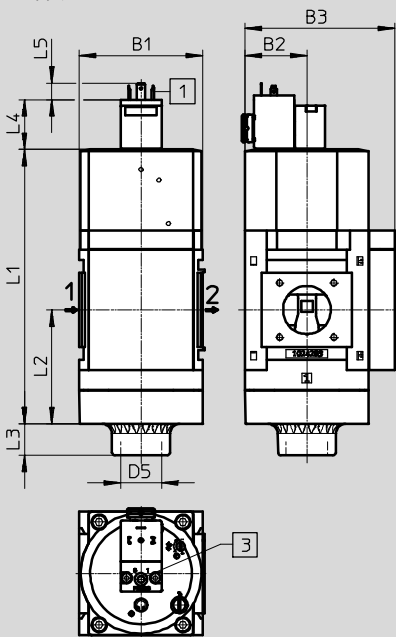

With silencer S



- 1 Plug connection to EN 175301-803
 - 2 Electrical connection to IEC 61076-2-101, plug M12x1, 4-pin to DESINA
 - 3 Manual override
- Flow direction

| Type | B1 | B2 | B3 | D2 | D5 | L1 | L2 | L3 | L4 | L5 | L6 |
|-------------------------------|----|----|-----|-------|----------------------|-----|----|----|------|----|-----|
| MS9-SV-G/NG-...-V24/V110/V230 | 90 | 45 | 109 | - | G1 | 200 | 83 | 23 | 36.4 | 12 | 189 |
| MS9-SV-G/NG-...-10V24P | | | | M12x1 | (NPT1) ¹⁾ | | | | 39.2 | 10 | |

1) Only with N3/4/N1/AQ.../NG without silencer S

Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data


FESTO

Dimensions – Connecting thread/connecting plate

Download CAD data → www.festo.com

With female thread 3/4/1/N3/4/N1

With connecting plate AG.../AQ...

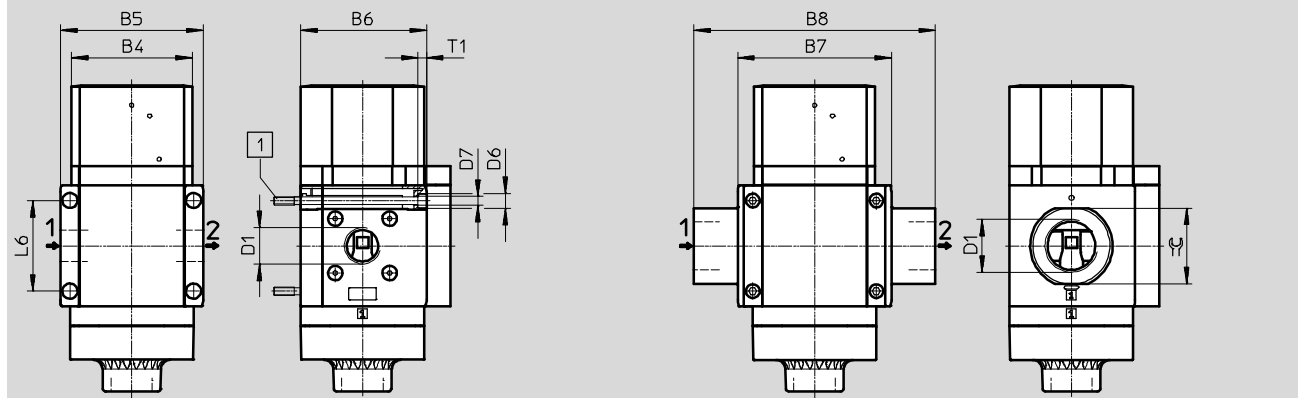

1 Mounting screw M6xmin.90 to DIN 912 (not included in the scope of delivery) for wall mounting without mounting bracket

→ Flow direction


| Type | B4 | B5 | B6 | B7 | B8 | D1 | D6 | D7 | L6 | T1 | ⊖ |
|-------------|----|-----|------|-----|-----|-----------------|----|-----|----|----|----|
| MS9-SV-3/4 | 90 | 104 | 91.5 | - | - | G3/4 | 11 | 6.5 | 66 | 6 | - |
| MS9-SV-1 | | | | | | G1 | | | | | |
| MS9-SV-AGD | - | - | - | 112 | 132 | G1/2 | - | - | - | - | 30 |
| MS9-SV-AGE | | | | | 132 | G3/4 | | | | | 36 |
| MS9-SV-AGF | | | | | 142 | G1 | | | | | 41 |
| MS9-SV-AGG | | | | | 162 | G1 1/4 | | | | | 50 |
| MS9-SV-AGH | | | | | 176 | G1 1/2 | | | | | 55 |
| MS9-SV-N3/4 | 90 | 104 | 91.5 | - | - | NPT3/4-14 | 11 | 6.5 | 66 | 6 | - |
| MS9-SV-N1 | | | | | | NPT1-11 1/2 | | | | | |
| MS9-SV-AQR | - | - | - | 112 | 132 | NPT1/2-14 | - | - | - | - | 30 |
| MS9-SV-AQS | | | | | 132 | NPT3/4-14 | | | | | 36 |
| MS9-SV-AQT | | | | | 142 | NPT1-11 1/2 | | | | | 41 |
| MS9-SV-AQU | | | | | 162 | NPT1 1/4-11 1/2 | | | | | 50 |
| MS9-SV-AQV | | | | | 176 | NPT1 1/2-11 1/2 | | | | | 55 |

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Soft-start and quick exhaust valves MS9-SV-C, MS series

Technical data

Dimensions – Pressure gauge/pressure gauge alternatives Download CAD data → www.festo.com
 Integrated MS pressure gauge with standard scale AG or red/green scale RG Adapter plate A4 for EN pressure gauge 1/4, without pressure gauge

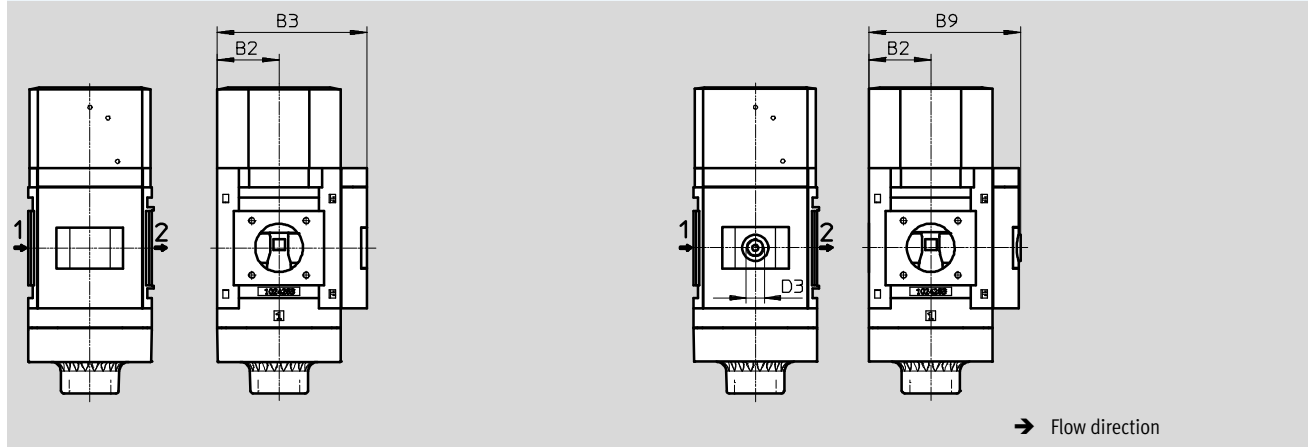

| Type | B2 | B3 | B9 | D3 |
|------------------|----|-----|-----|------|
| MS9-SV-...-AG/RG | 45 | 109 | – | – |
| MS9-SV-...-A4 | | – | 110 | G1/4 |

– | – Note: This product conforms to ISO 1179-1 and to ISO 228-1

Dimensions – Pressure gauge/pressure gauge alternatives Download CAD data → www.festo.com
 Pressure sensor with operational status indicator AD7 ... AD10 Technical data → Internet: [sde5](http://sde5.festo.com)

Variant AD7:
SDE5-D10-0-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/O contact

Variant AD8:
SDE5-D10-C-...-P-M8 with 3-pin plug M8x1, threshold value comparator, 1 switching output PNP, N/C contact

Variant AD9:
SDE5-D10-03-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/O contact

Variant AD10:
SDE5-D10-C3-...-P-M8 with 3-pin plug M8x1, window comparator, 1 switching output PNP, N/C contact

| Type | B2 | B11 | D3 |
|-----------------------------|----|-----|----|
| MS9-SV-...-AD7/AD8/AD9/AD10 | 45 | 112 | M8 |

| Ordering data | | | |
|---------------|------------|---------------|---------------------|
| Size | Connection | With silencer | |
| | | Part No. | Type |
| Cover plate | | | |
| MS9 | – | 570737 | MS9-SV-G-C-V24-S-VS |

Soft-start and quick exhaust valves MS9-SV-C, MS series



Ordering data – Modular products

M Mandatory data →

| Module No. | Series | Size | Function | Pneumatic connection | Performance level | Supply voltage |
|-------------------------|-----------|----------|-------------|---------------------------------------|-------------------|-------------------------|
| 562176 | MS | 9 | SV | 3/4, 1, AG..., N3/4, N1, AQ..., G, NG | C | V24, 10V24P, V110, V230 |
| Ordering example | | | | | | |
| 562176 | MS | 9 | - SV | - 1 | - C | - V24 |

Ordering table

| Grid dimension | [mm] | 90 | Conditions | Code | Enter code |
|----------------------|--|--|------------|----------------|------------|
| M Module No. | 562176 | | | | |
| Series | Standard | | | MS | MS |
| Size | 9 | | | 9 | 9 |
| Function | Soft-start and quick exhaust valve | | | -SV | -SV |
| Pneumatic connection | Female thread G3/4 | | | -3/4 | |
| | Female thread G1 | | | -1 | |
| | Connecting plate G1/2 | | | -AGD | |
| | Connecting plate G3/4 | | | -AGE | |
| | Connecting plate G1 | | | -AGF | |
| | Connecting plate G1 1/4 | | | -AGG | |
| | Connecting plate G1 1/2 | | | -AGH | |
| | Female thread NPT3/4 | | | -N3/4 | |
| | Female thread NPT1 | | | -N1 | |
| | Connecting plate NPT1/2 | | | -AQR | |
| | Connecting plate NPT3/4 | | | -AQS | |
| | Connecting plate NPT1 | | | -AQT | |
| | Connecting plate NPT1 1/4 | | | -AQU | |
| | Connecting plate NPT1 1/2 | | | -AQV | |
| | Module without connecting thread, without connecting plate | | | -G | |
| | Module without connecting thread, without connecting plate | | | -NG | |
| | Performance level | Category 1, 1-channel, to EN ISO 13849-1 | | | -C |
| Supply voltage | 24 V DC (pin allocation to EN 175301), 16 bar | | | -V24 | |
| | 24 V DC, M12 to IEC 61076-2-101, 10 bar | | | -10V24P | |
| | 110 V AC (pin allocation to EN 175301), 16 bar | | | -V110 | |
| | 230 V AC (pin allocation to EN 175301), 16 bar | | | -V230 | |

Transfer order code

| | | | | | | | | |
|---------------|-----------|----------|-------------|---|--|------------|---|--|
| 562176 | MS | 9 | - SV | - | | - C | - | |
|---------------|-----------|----------|-------------|---|--|------------|---|--|

Soft-start and quick exhaust valves MS9-SV-C, MS series

Ordering data – Modular products

| | | | | | | |
|------------|---|--|------------------|----------------------|------------------|----------------|
| [O] | [M] | [O] Options | | | | |
| Silencer | Pressure gauge/ pressure gauge alternatives | Alternative pressure gauge scale | Type of mounting | Tamper protection | UL certification | Flow direction |
| S | AG, VS, A4, RG, AD7 ... AD10 | PSI, MPA, BAR | WP, WPM, WPB | MH, MK | UL1 | Z |
| - S | - AG | - | - | - | - | - |

| Ordering table | | Grid dimension [mm] | 90 | Condi- tions | Code | Enter code |
|-------------------|---|--|------------|-----------------|--------------|---------------|
| [O] | Silencer | Silencer | | | -S | |
| [M] | Pressure gauge/pressure gauge alternatives | MS pressure gauge | | | -AG | |
| | | Cover plate | | | -VS | |
| | | Adapter plate for EN pressure gauge 1/4, without pressure gauge | | | -A4 | |
| | | Integrated pressure gauge, red/green scale | | [1] | -RG | |
| | | Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/O contact | | [2] | -AD7 | |
| | | Pressure sensor with operational status indicator, plug M8, threshold value comparator, PNP, N/C contact | | [2] | -AD8 | |
| | | Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/O contact | | [2] | -AD9 | |
| | | Pressure sensor with operational status indicator, plug M8, window comparator, PNP, N/C contact | | [2] | -AD10 | |
| [O] | Alternative pressure gauge scale | psi | [3] | -PSI | | |
| | | MPa | [3] | -MPA | | |
| | | bar | [3] | -BAR | | |
| Type of mounting | Mounting bracket standard design | | [4] | -WP | | |
| | Mounting bracket for attaching the service units | | [4] | -WPM | | |
| | Mounting bracket for large wall gap | | [4] | -WPB | | |
| Tamper protection | Without manual override (manual override at soft-start/quick exhaust valve locked, adjusting screws open, manual override at pilot solenoid valve locked) | | | -MH | | |
| | Complete (manual override at soft-start/quick exhaust valve locked, adjusting screws locked, manual override at pilot solenoid valve locked) | | | -MK | | |
| UL certification | cULus, ordinary location for Canada and USA | | [5] | -UL1 | | |
| Flow direction | Flow direction from right to left | | | -Z | | |

- | | | | |
|--------------------------------|---|--------------------------|---|
| [1] RG | Not with alternative pressure gauge scale PSI, PSI scale serves only as an auxiliary scale (inner scale), outer scale in bar | [3] PSI, MPA, BAR | Only in combination with pressure gauge AG or RG. |
| [2] AD7, AD8, AD9, AD10 | Measuring range max. 10 bar | [4] WP, WPM, WPB | Not with pneumatic connection G, NG |
| | | [5] UL1 | Not with supply voltage V110, V230 |

Transfer order code

- **S** - - - - -

Soft-start and quick exhaust valves MS-SV, MS series

FESTO

Accessories

Multi-pin plug socket NECA

(order code in the modular product system: MP1/MP3/MP5)

- For soft-start and quick exhaust valve MS6-SV-E-10V24



| Technical data | | |
|-------------------------------|--------------------|---------------------------------------|
| Type of mounting | | Via through-hole |
| Electrical connection 1 | | Sub-D 9-pin |
| Electrical connection 2 | | Screw terminal 9-pin |
| Operating voltage range | [V DC] | 21.6 ... 26.4 |
| Nominal operating voltage | [V DC] | 24 |
| Acceptable current load | [A] | 1.0 |
| Connection cross section | [mm ²] | 0.34 ... 1.0 without wire end sleeves |
| | [mm ²] | 0.34 ... 0.5 with wire end sleeves |
| Permissible cable diameter | [mm] | 5.0 ... 10.0 |
| Protection class to IEC 60529 | | IP65 |

| Operating and environmental conditions | | |
|--|------|---------------------|
| Relative air humidity | | 95%, non-condensing |
| Ambient temperature | [°C] | 0 ... +50 |
| Storage temperature | [°C] | -20 ... +70 |
| Corrosion resistance class CRC ¹⁾ | | 2 |


- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

| Materials | |
|-----------|---------------|
| Housing | PA reinforced |
| Screws | Steel |
| Union nut | Brass |
| Seals | NBR |

Soft-start and quick exhaust valves MS-SV, MS series

Accessories

Dimensions Download CAD data → www.festo.com



| B1 | H1 | L1 | L2 |
|----|----|----|------|
| 61 | 20 | 61 | 54.1 |

| Ordering data | | | | |
|--------------------|--|------------|----------|------------------|
| Description | Connection | Weight [g] | Part No. | Type |
| For MS6-SV-E-10V24 | Without cable, static enable signals (EN1 = 24 V, EN2 = 24 V) | 60 | 548719 | NECA-S1G9-P9-MP1 |
| | Without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), cross-circuit detection possible | 60 | 552703 | NECA-S1G9-P9-MP3 |
| | Without cable, static enable signals (EN1 = 0 V, EN2 = 24 V), galvanic isolation of the enable signals from the supply voltage | 60 | 573695 | NECA-S1G9-P9-MP5 |

Soft-start and quick exhaust valves MS-SV, MS series

Accessories


Silencer UOS-1

(order code in the modular product system: S0)

- For soft-start and quick exhaust valve MS6-SV-D/E

Silencer UOS-1-LF

- For soft-start and quick exhaust valve MS6-SV-D/E

 Note
The space-saving silencer UOS-1-LF may only be used for applications with low exhaust rates. Pneumatic port 2 at the soft-start and quick exhaust valve MS6-SV-D/E must be reduced to G¹/₄ using a connecting plate MS6-AGB.



| Technical data | |
|---------------------------------|-----------------|
| Pneumatic connection | G1 |
| Design | Open silencer |
| Type of mounting | Via male thread |
| Mounting position | Any |
| Type of seal on threaded collar | No seal |


| Operating and environmental conditions | |
|--|---|
| Operating pressure [bar] | 0 ... 10 |
| Operating medium | Compressed air to ISO 8573-1:2010 [-:-:-] |
| Ambient temperature [°C] | -10 ... +50 |
| Corrosion resistance class CRC ¹⁾ | 2 |

1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


| Materials | | |
|-------------------|-------------------------|-------------------------|
| Type | UOS-1 | UOS-1-LF |
| Housing | POM | Wrought aluminium alloy |
| Sleeve | Wrought aluminium alloy | - |
| Silencer insert | PE | |
| Note on materials | RoHS-compliant | |
| | Free of copper and PTFE | |

Dimensions Download CAD data → www.festo.com

UOS-1

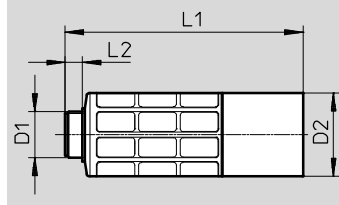

UOS-1-LF



| Type | D1 | D2 | L1 | L2 |
|----------|----|----|-------|------|
| UOS-1 | G1 | 55 | 156.5 | 11.5 |
| UOS-1-LF | | | 72.2 | 13 |

| Ordering data | | | | |
|----------------|-----------------------|------------|----------|----------|
| Description | | Weight [g] | Part No. | Type |
| For MS6-SV-D/E | For high exhaust rate | 200 | 552252 | UOS-1 |
| | For low exhaust rate | 157.9 | 1901207 | UOS-1-LF |


Soft-start and quick exhaust valves MS-SV, MS series

Accessories

AS-i configuration plug CACC

- For soft-start and quick exhaust valve MS6-SV-E-ASIS

Note on materials: RoHS-compliant

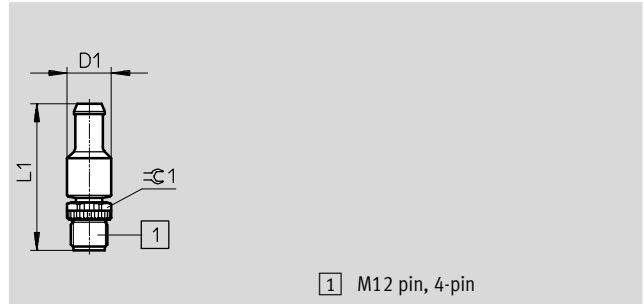

1 M12 pin, 4-pin

| Dimensions and ordering data | | | | | |
|------------------------------|------|------|-------------------------|----------|------------|
| Description | D1 | L1 | $\approx \varnothing 1$ | Part No. | Type |
| For MS6-SV-E-ASIS | 14.5 | 48.3 | 13 | 573923 | CACC-CP-AS |

Cover MS-SV-MH/MK

(order code in the modular product system: MH/MK)

- For soft-start and quick exhaust valve MS6/9-SV-C

Note on materials: RoHS-compliant



MS6-SV-C-MK



MS9-SV-MK



MS9-SV-MH

| Ordering data | | | | | |
|---------------|---|-------------------|----------|-------------|--|
| Description | | CRC ¹⁾ | Part No. | Type | |
| For MS6-SV-C | Tamper protection for manual override at the soft-start and quick exhaust valve, flow control screw, adjusting screw for pressure switchover point and manual override at the pilot solenoid valve (MS6-SV-...-C-10V24/10V24P only) | 2 | 8001479 | MS6-SV-C-MK | |
| For MS9-SV-C | Tamper protection for manual override at the soft-start and quick exhaust valve, flow control screw, adjusting screw for pressure switchover point and manual override at the pilot solenoid valve | 2 | 1457669 | MS9-SV-MK | |
| | Tamper protection for manual override at the soft-start and quick exhaust valve and manual override at the pilot solenoid valve | 2 | 1457670 | MS9-SV-MH | |


1) Corrosion resistance class CRC 2 to Festo standard FN 940070



Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.


Soft-start and quick exhaust valves MS-SV, MS series



FESTO

Accessories

| Ordering data – Silencer U-...-B | | | | Technical data → Internet: u | |
|---|--------------|----------------------|--|------------------------------|----------------|
| | Description | Pneumatic connection | Order code in the modular product system | Part No. | Type |
|  | For MS6-SV-C | G3/4 | S | 6845 | U-3/4-B |
| | For MS9-SV-C | G1 | S | 151990 | U-1-B |

| Ordering data – Proximity sensor SMT | | | | | | | Technical data → Internet: smt | |
|---|--------------|------------------|----------------------------|------------------------------|------------------|--|--------------------------------|---------------------------|
| | Description | Switching output | Switching element function | Electrical connection | Cable length [m] | Order code in the modular product system | Part No. | Type |
|  | For MS6-SV-D | PNP | N/O contact | Cable with plug M8x1, 3-pin | 0.3 | 2M8/S3 | ★ 574334 | SMT-8M-A-PS-24V-E-0,3-M8D |
| | | | | Cable with plug M12x1, 3-pin | 0.3 | 2M12/S3 | ★ 574337 | SMT-8M-A-PS-24V-E-0,3-M12 |
|  | For MS6-SV-D | PNP | N/O contact | Cable, 3-wire | 5 | 20E/S3 | ★ 574336 | SMT-8M-A-PS-24V-E-5,0-OE |

| Ordering data – Plug socket MSSD | | | | Technical data → Internet: mssd | |
|---|----------------|-----------------------|---------------------------------------|---------------------------------|---------------|
| | Description | Electrical connection | Type of mounting for cable connection | Part No. | Type |
|  | For MS6-SV-C/D | 3-pin | Clamping screws | ★ 151687 | MSSD-EB |
| | | 4-pin | Insulation displacement connectors | 192745 | MSSD-EB-S-M14 |
| | For MS9-SV-C | 3-pin | Clamping screws | 539712 | MSSD-EB-M12 |
| | | 3-pin | Clamping screws | 34583 | MSSD-C |
| | | 4-pin | Insulation displacement connectors | 192748 | MSSD-C-S-M16 |
| | | 4-pin | Insulation displacement connectors | 192748 | MSSD-C-S-M16 |

| Ordering data – Plug socket with cable KMEB/connecting cable KMC | | | | | | Technical data → Internet: kmeb, kmc | |
|---|----------------|-------------------|-----------------------|--------------------------|------------------|--------------------------------------|--------------------|
| | Description | Operating voltage | Electrical connection | Switching status display | Cable length [m] | Part No. | Type |
|  | For MS6-SV-C/D | 24 V DC | 2-pin | LED | 2.5 | 547268 | KMEB-3-24-2,5-LED |
| | | | | – | 5 | 547269 | KMEB-3-24-5-LED |
| | | | | – | 2.5 | 547270 | KMEB-3-24-2,5 |
| | | | 3-pin | LED | 5 | 547271 | KMEB-3-24-5 |
| | | | | LED | 2.5 | ★ 151688 | KMEB-1-24-2,5-LED |
| | | | | LED | 5 | 151689 | KMEB-1-24-5-LED |
| | | 230 V AC | 3-pin | – | 10 | 193457 | KMEB-1-24-10-LED |
| | | | | – | 2.5 | 151690 | KMEB-1-230AC-2,5 |
| | | | 3-pin | – | 5 | 151691 | KMEB-1-230AC-5 |
| | | | | – | 5 | 151691 | KMEB-1-230AC-5 |
|  | For MS9-SV-C | 24 V DC | 3-pin | LED | 2.5 | 30931 | KMC-1-24DC-2,5-LED |
| | | | | | 5 | 30933 | KMC-1-24DC-5-LED |
| | | | | | 10 | 193459 | KMC-1-24-10-LED |
| | | 230 V AC | 3-pin | – | 2.5 | 30932 | KMC-1-230AC-2,5 |
| | | | | | 5 | 30934 | KMC-1-230AC-5 |
| | | | | | 5 | 30934 | KMC-1-230AC-5 |


Festo core product range



- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock



Soft-start and quick exhaust valves MS-SV, MS series

FESTO


Accessories


| Ordering data – Illuminating seal MEB-LD/MC-LD | | | | Technical data → Internet: meb, mc | |
|---|---|-------------------------|---------------|------------------------------------|--|
| | Description | Operating voltage range | Part No. | Type | |
|  | For plug socket with cable KMEB and plug socket MSSD-EB | 12 ... 24 V DC | 151717 | MEB-LD-12-24DC | |
| | | 230 V DC/AC ±10% | 151718 | MEB-LD-230AC | |
| | For connecting cable KMC and plug socket MSSD-C | 12 ... 24 V DC | 19145 | MC-LD-12-24DC | |
| | | 230 V DC/AC ±10% | 19146 | MC-LD-230AC | |

| Ordering data – Connecting cable NEBU-M8 | | | | Technical data → Internet: nebu | |
|---|-----------------------|-----------------|------------------|---------------------------------|----------------------------|
| | Electrical connection | Number of wires | Cable length [m] | Part No. | Type |
|  | M8x1, straight socket | 3 | 2.5 | ★ 541333 | NEBU-M8G3-K-2.5-LE3 |
| | | | 5 | ★ 541334 | NEBU-M8G3-K-5-LE3 |
|  | M8x1, angled socket | 3 | 2.5 | ★ 541338 | NEBU-M8W3-K-2.5-LE3 |
| | | | 5 | ★ 541341 | NEBU-M8W3-K-5-LE3 |

| Ordering data – Connecting cable NEBU-M12 | | | | Technical data → Internet: nebu | |
|---|------------------------|-----------------|------------------|---------------------------------|-----------------------------|
| | Electrical connection | Number of wires | Cable length [m] | Part No. | Type |
|  | M12x1, straight socket | 4 | 2.5 | ★ 550326 | NEBU-M12G5-K-2.5-LE4 |
| | | | 5 | ★ 541328 | NEBU-M12G5-K-5-LE4 |
|  | M12x1, angled socket | 4 | 2.5 | 550325 | NEBU-M12W5-K-2.5-LE4 |
| | | | 5 | 541329 | NEBU-M12W5-K-5-LE4 |

| Ordering data – Sensor socket SIE-GD | | | Technical data → Internet: sie-gd | |
|---|-----------------------|--|-----------------------------------|---------------|
| | Electrical connection | | Part No. | Type |
|  | M12x1, 4-pin | | 18494 | SIE-GD |

| Ordering data – Angled socket SIE-WD | | | Technical data → Internet: sie-wd | |
|---|-----------------------|--|-----------------------------------|------------------|
| | Electrical connection | | Part No. | Type |
|  | M12x1, 4-pin | | 12956 | SIE-WD-TR |

| Ordering data – Pressure gauge MA | | | | | | |
|---|---|----------------------|---------------|---------------|--|--|
| | Nominal size | Pneumatic connection | Display range | | Part No. | Type |
| | | | [bar] | [psi] | | |
|  | Pressure gauge MA, EN 837-1 | | | | | |
| | 40 | R $\frac{1}{4}$ | 0 ... 16 | 0 ... 232 | 187080 | MA-40-16-R$\frac{1}{4}$-EN |
| | | G $\frac{1}{4}$ | 0 ... 16 | 0 ... 232 | 183901 | MA-40-16-G$\frac{1}{4}$-EN |
| | Pressure gauge MA, EN 837-1, with red/green range | | | | | |
| 50 | R $\frac{1}{4}$ | 0 ... 16 | – | 525729 | MA-50-16-R$\frac{1}{4}$-E-RG | |

Festo core product range

- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock