

Midi free-standing Beacons / EvoSIGNAL

**Midi TwinLIGHT 115-230VAC GN**



|                  |                       |
|------------------|-----------------------|
| <b>Part No.:</b> | <b>261.210.60</b>     |
| <b>Series:</b>   | <b>EvoSIGNAL Midi</b> |




| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 130 mm                      |
| Diameter                     | 85 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Green                       |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Service life optical         | 50,000 h minimum            |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 286 g                       |
| Product weight               | 186 g                       |

| ELECTRICAL DATA             |                              |
|-----------------------------|------------------------------|
| Operating voltage           | 115-230V                     |
| Operating voltage type      | AC                           |
| Operating voltage type      | 50Hz at 230V<br>60Hz at 115V |
| Operating voltage tolerance | +/- 10%                      |
| Rated operational voltage   | 230 VAC                      |
| Rated operational current   | 65 mA                        |
| Rated inrush current        | 7A                           |
| Protection class            | Protection class 2           |
| Pollution degree            | 3                            |
| Overvoltage category        | II                           |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V     |

| OPTICAL DATA         |                                 |
|----------------------|---------------------------------|
| Light source         | LED                             |
| Light colour         | Green                           |
| Optical signal image | Blink<br>Permanent<br>TwinLight |
| Blink frequency (Hz) | 1 Hz                            |

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinLIGHT 115-230VAC GN**

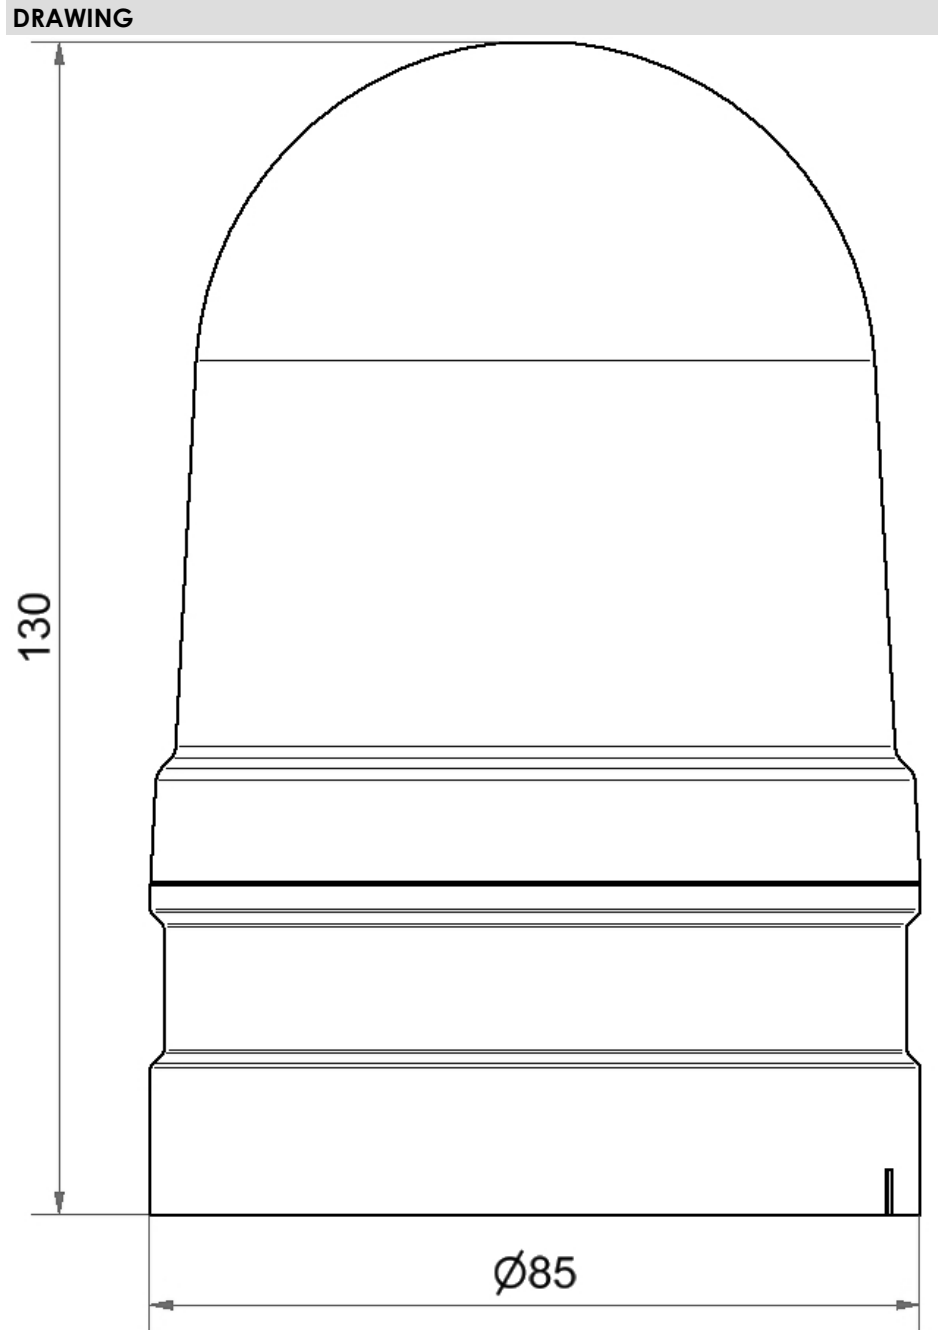

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.