

KombiSIGN 50 / Permanent Beacon 846
Perm. light element 12-230VAC/DC YE



| | |
|-----------|--------------|
| Part No.: | 846.300.00 |
| Series: | KombiSIGN 50 |



| MECHANICAL DATA | |
|-----------------------------|-------------|
| Height | 67 mm |
| Diameter | 52 mm |
| Materials | PC |
| Dome colour | Yellow |
| Protection category | IP54 |
| Tension relief | Not present |
| Working temperature minimum | -20°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 40 g |
| Product weight | 40 g |

| ELECTRICAL DATA | |
|------------------------|--------------------------|
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| OPTICAL DATA | |
|----------------------|-----------------|
| Light colour | Yellow |
| Service life optical | depends on bulb |


| APPROVAL DATA | |
|-----------------------------|---------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Permanent Beacon 846

Perm. light element 12-230VAC/DC YE

DRAWING

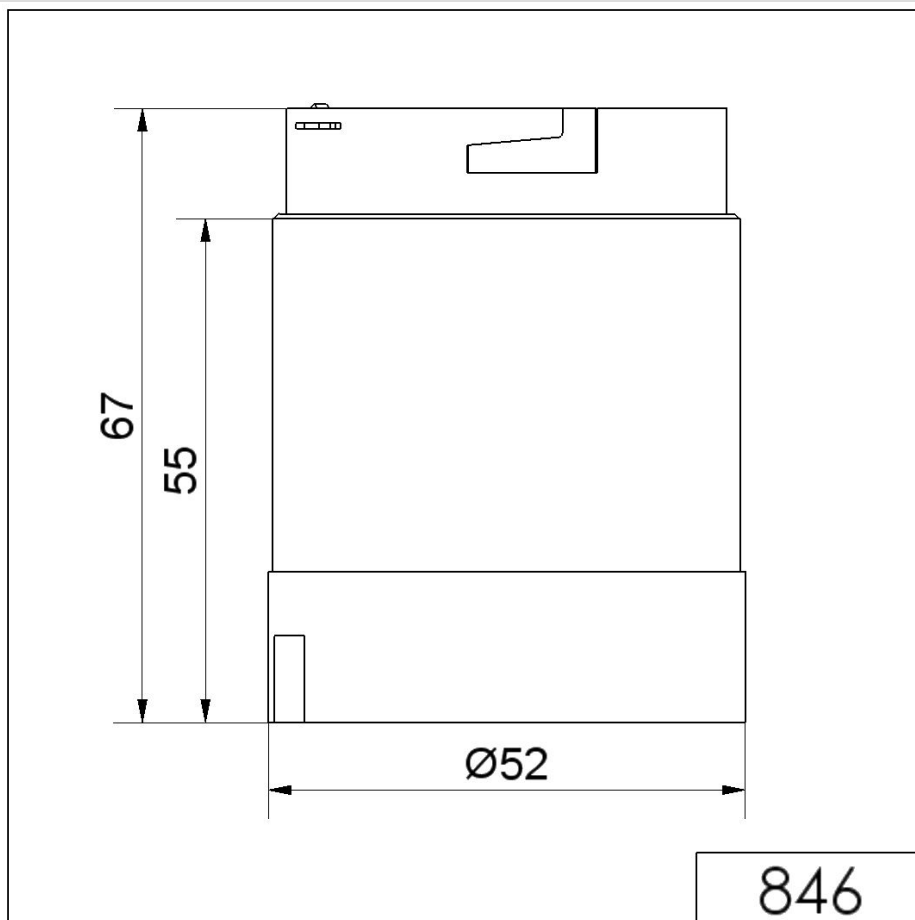

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.