

KombiSIGN 50 / Permanent Beacon 846

**Perm. light element 12-230VAC/DC CL**

Part No.:	846.400.00
Series:	KombiSIGN 50

**MECHANICAL DATA**

Height	67 mm
Diameter	52 mm
Materials	PC
Dome colour	Clear
Protection category	IP54
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+60°C
Weight with packaging	40 g
Product weight	40 g

**ELECTRICAL DATA**

Operating voltage	12-230V
Operating voltage type	AC/DC
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

**OPTICAL DATA**

Light colour	White
Service life optical	depends on bulb

**APPROVAL DATA**

Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Permanent Beacon 846

**Perm. light element 12-230VAC/DC CL**

## DRAWING

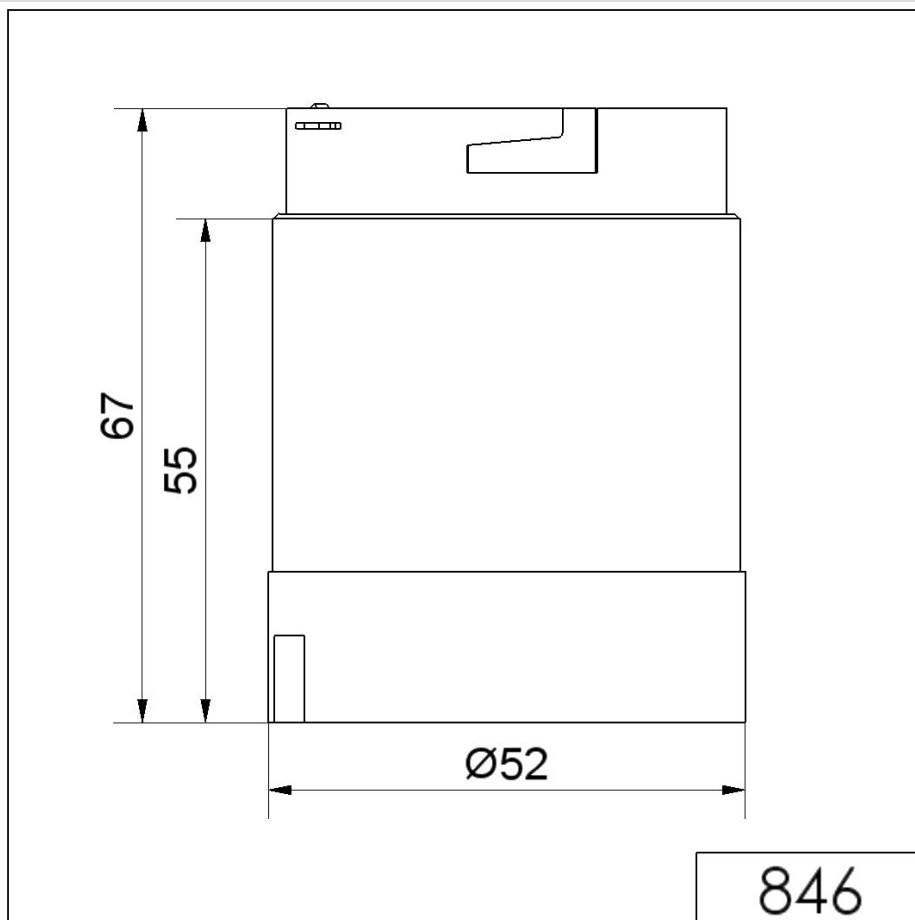

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.