

**BGL 5A-001-S49**  
**Order code: BGL001W**


Slot sensor  
 Series A GLOBAL  
 5 mm



**BALLUFF**

sensors worldwide

DC, direct current  
 PNP (1X)  
 NO/NC: dark-on/light-on  
 3000 Hz  
 LED, red light

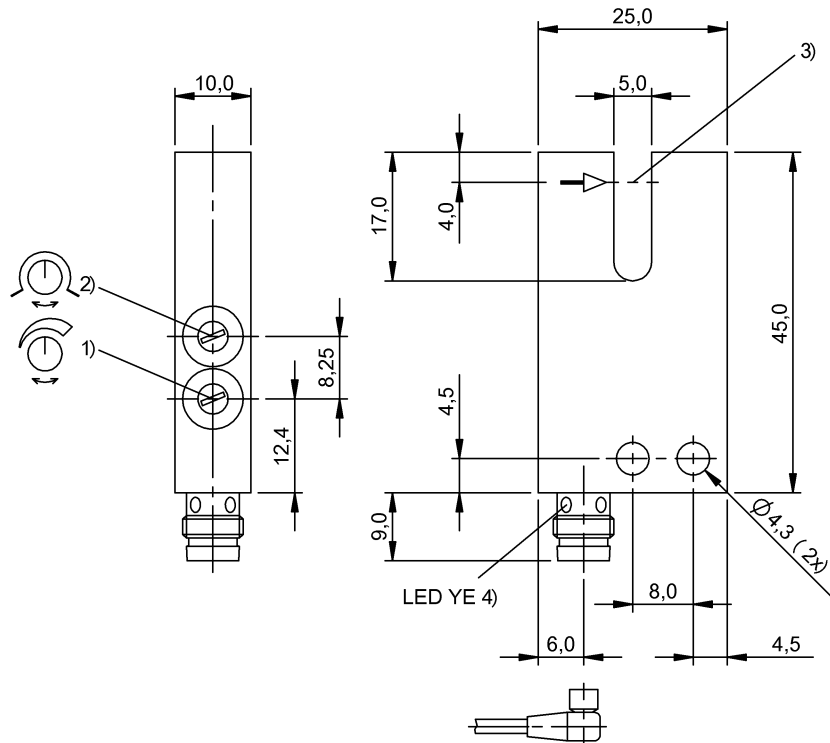

1) Sensitivity 2) Light-on / Dark-on 3) Optical axis 4) Output function

**Basic data**

Operating voltage UB DC	10.0 V... 30.0 V
Eff. operating voltage Ue DC	24.0 V
Ripple max. (% of Ue)	10 %
No-load current max. Io at Ue	25 mA
Polarity reversal protected	Yes
Rated insulation voltage Ui	75 V DC
Indicator	Output function - LED YE
Adjuster	Potentiometer, 270° (2x)
Setting	Sensitivity
	Light-on/dark-on
Ambient temperature Ta	-10 °C... 60 °C

**Optical data**

Principle of optical operation	Through-beam
Light type	LED, red light
Wavelength	636 nm
Light spot size, typical	Ø1.0 mm light exit
Beam characteristic	Divergent
Repeat accuracy lateral max.	20 µm
Smallest part, typical	0.30 mm
Ambient light max.	5,000 Lux

**Electrical data**

Switching output	PNP (1X)
Switching function	NO/NC
Eff. operating current Ie	200 mA
Switching freq. f max. (at Ue)	3000 Hz
Turn on time ton max.	0.167 ms
Turn off time toff max.	0.167 ms
Voltage drop Ud max. (at Ie)	3.0 V
Hysteresis H max.	0.100 mm
Short circuit protected	Yes
Load capacitance max. (at Ue)	0.50 µF

**Mechanical data**

Style	Slot, straight connection
Fork width	5 mm
Dimensions	10.0 mm x 54.0 mm x 25.0 mm
Mounting type	Screw M4
Housing material	GD-Zn
Surface protection	Painted
Sensing face material	Glass
Degree of protec. per IEC60529	IP67
Connection type	Connector
Connector type	M8x1-S49

000000115919/156456/20130517

[www.balluff.com](http://www.balluff.com)

Balluff Germany: +49 7158 173-0, +49 7158 173-370  
 Balluff USA: +1-800-543-8390  
 Balluff China: +86 21 5089 9970

1 (2)  
 Print Date: 18.02.2016  
 Selection date: 18.02.2016

**BGL 5A-001-S49**  
**Order code: BGL001W**

**Slot sensor**  
**Series A GLOBAL**  
**5 mm**

**BALLUFF**

*sensors worldwide*

**DC, direct current**  
**PNP (1X)**  
**NO/NC: dark-on/light-on**  
**3000 Hz**  
**LED, red light**

**Approval**

Approvals / Conformity CE  
cULus

**Remarks**



Basic standard IEC 60947-5-2  
The sensor is functional again after the overload has been eliminated.

Reference object (test target): Steel sheet metal, 50 x 50, thickness 0.5 mm, lateral approach.  
Factory default setting for switching output: Normally open.  
Only for NFPA 79 applications (machines with a supply voltage of maximum 600 volts). Device shall be connected only by using any R/C (CYJV2) cord, having suitable ratings.  
For additional information, refer to user's guide.  
Order accessories separately.



Definitions see general catalog

Subject to change without notice.



000000115919/156456/20130517