



2

### Models Available

- DN33V7LR20** 1 Relay NTC/PTC/PT1000
- DN33V9MR20** 1 Relay Universal Input
- DN33W7LR20** 2 Relay NTC/PTC/PT1000
- DN33W9MR20** 2 Relay Universal Input
- DN33Z7LR20** 4 Relay NTC/PTC/PT1000
- DN33Z9MR20** 4 Relay Universal Input
- DN33A7LR20** 4 SSR NTC/PTC/PT1000
- DN33A9MR20** 4 SSR Universal Input

### Product Features

- Temperature input or universal input
- Relay or SSR output versions
- 2 independent control loops
- Auto-tuning PID control
- Real time clock
- Infrared receiver and buzzer
- Transformers available for 110V or 230V
- Plug-in terminals



## DN33 Universal Electronic Controllers

The DN33 universal electronic controllers replace the IRDR range, offering additional features such as auto-tuning PID control and real time clock for managing working cycles and logging alarms. Temperature only versions are available with NTC, PTC or PT1000 inputs, whilst the universal versions can also accept PT100, J and K type thermocouples, DC Voltage and DC mA inputs.

The controllers feature a simple user interface, two independent control loops and are housed in a compact DIN rail mounting enclosure. All versions can be connected to a network for monitoring and programming, using the optional RS-485 serial interface. The DN33 controllers are powered from 12 to 24Vac/dc and optional transformers are available for powering the controllers from 110Vac or 230Vac.

### For digital temperature or process monitoring and control


#### Dimensions

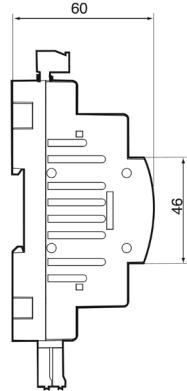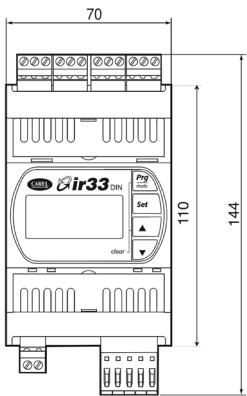

Panel cutout 70mm x 46mm (-0.0/+0.5)


#### Connections

##### DN33V7LR20 / DN33W7LR20 / DN33Z7LR20

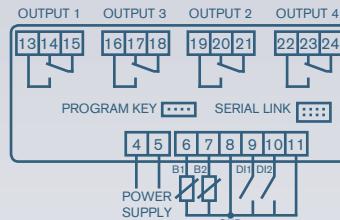


DN33V7LR20 - OUTPUT 1 ONLY  
DN33W7LR20 - OUTPUTS 1 AND 2  
DN33Z7LR20 - OUTPUTS 1, 2, 3 AND 4


##### DN33A7LR20

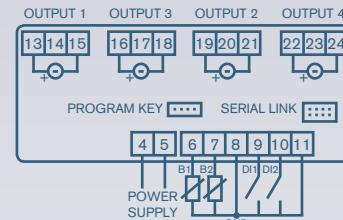

##### DN33V9MR20 / DN33W9MR20 / DN33Z9MR20

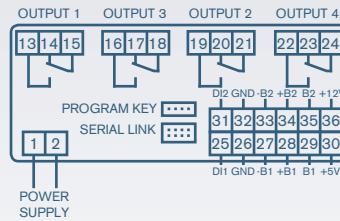

DN33V9MR20 - OUTPUT 1 ONLY  
DN33W9MR20 - OUTPUTS 1 AND 2  
DN33Z9MR20 - OUTPUTS 1, 2, 3 AND 4

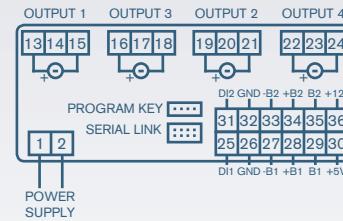

All dimensions in mm

Tempatron

Tel: +44(0)1621 859500

Fax: +44(0)1621 855335

**Ordering information**

Model	Code	Description
DN33V	1	Relay Output Digital Controller
DN33W	2	Relay Output Digital Controller
DN33Z	4	Relay Output Digital Controller
DN33A	4	SSR Output Digital Controller
Input	Code	Description
	7	NTC (-50 to 90°C) NTC-HT (-40 to 150°C) PTC (-50 to 150°C) PT1000 (-50 to 150°C)
	9	All above inputs and in addition: PT1000 (-199 to 800°C) PT100 (-199 to 800°C) J/K Type Thermocouples DC Voltage 0-1V, -0.5 to +1.3V, 0-10V, 0-5V ratiometric DC Current 0-20mA, 4-20mA
Auxiliary Power	Code	Description
LR20		12 to 24Vac, 12 to 30Vdc
MR20		24Vac/dc
Options	Code	Description
TRA12UNI11		110/12Vac Transformer
TRA12UNI00		240/12Vac Transformer
TRA2400001		240/24Vac Transformer
IRTRUES000		Remote control for IR33 universal
IROPZKEY00		Programming key with battery
IROPZKEYA0		Programming key with 230V power supply
IROPZ485S0		RS485 serial communication interface
Example	<b>DN33V7LR20</b>	

**Options****Temperature Probes**

A range of NTC, PTC, PT100 and thermocouple temperature probes are available to suit the DN33 controllers.

**Remote Control**

The infrared remote control allows access to all the main functions and configuration parameters for easy set up of all DN33 controllers from a distance.

**Programming Key**

All DN33 controllers can be programmed quickly using the optional programming key, even when not powered, reducing the risk of errors.

**Specification****Accuracy:**

- ±0.5% of scale range

**Power Supply Voltage:**

- LR: 12 to 24Vac (±10%), 12 to 30Vdc
- 110Vac with TRA12UNI11 transformer
- 230Vac with TRA12UNI00 transformer
- MR: 24Vac/dc
- 230Vac with TRA2400001 transformer

**Frequency:**

- 50/60Hz

**Burden:**

- <3VA

**Inputs:**

- NTC / PTC / PT1000
- PT100, J/K, V, mA (universal model only)

**Digital Inputs:**

- 2 voltage free contacts
- Contact resistance <10ohms
- Closing current 6mA

**Relay Output:**

- 1, 2 or 4 pole relay contacts
- 8A at 250Vac (resistive)
- 4A at 250Vac (inductive,  $\cos\theta = 0.6$ )
- 100,000 operations

**SSR Output:**

- Maximum output 12V/20mA
- Maximum output resistance 600 ohms

**Operating Temperature & Humidity:**

- -10°C to 50°C
- <90% rH (non-condensing)

**Enclosure Code:**

- Case front IP40

**Weight:**

- DN33V: 300g
- DN33W: 320g
- DN33Z: 340g
- DN33A: 300g

**Markings:**

- CE marked (meets EN61010-1 low voltage and EN50081-1/50082-1 EMC directives)

Specification subject to change without notice.

Tempatron: Eltime House, Hall Road, Maldon, Essex, CM9 4NF UK.

# TEMPATRON

Tempatron Industrial Controls is a division of Eltime Ltd.

© Eltime Ltd. Tempatron DN33 Controllers 07/2012