

## Inline function terminal - IB IL RS 232-2MBD-PAC - 2862084

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Inline RS-232 function terminal block, for serial data transmission, complete with accessories (connector and labeling field), 1 serial input and output channel in RS-232 design

### Why buy this product

- ✓ One serial RS-232 input and output channel
- ✓ Various protocols supported
- ✓ Transmission speeds can be set up to 38400 Baud
- ✓ Number of data bits, stop bits and parity can be set
- ✓ 4 kbyte receive buffer and 1 kbyte transmit buffer
- ✓ Diagnostic and status indicators



### Key commercial data

Packing unit	1 pc
GTIN	 4 017918 974718
Weight per Piece (excluding packing)	135.0 g
Custom tariff number	85389091
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	24.4 mm
Height	136.8 mm
Depth	71.5 mm

#### General

Number of connectors	2
Color	green

# Inline function terminal - IB IL RS 232-2MBD-PAC - 2862084

## Technical data

### General

Weight	135 g
Mounting type	DIN rail
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % ... 85 % (in the range of -25°C ... +55°C, appropriate measures against increased humidity (> 85%) must be taken.)
Permissible humidity (storage/transport)	75 % ... 85 % (Slight temporary condensation may sometimes appear on the housing, e.g. when the terminal block is brought out of a vehicle into an enclosed room.)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

### Interfaces

Interface	Inline local bus
Connection method	Inline data jumper
Transmission speed	2 MBit/s
Interface	Serial RS-232
Connection method	Spring-cage connection
Transmission speed	110 Bit/s ... 38400 Bit/s (configurable)
Input buffer	4 kByte
Output buffer	1 kByte
Data bits	7 or 8
Stop bits	1 or 2

### Power supply

Typical current consumption	165 mA
I/O voltage	24 V DC (via voltage jumper)
I/O voltage range	19.2 V DC ... 30 V DC

### Serial input/output channel

Parity	Even, odd or no parity
Transmission type	Transparent mode, end-end mode, dual buffer mode, 3964R, XON/XOFF

### Inline potentials

Communications power $U_L$	7.5 V (via voltage jumper)
Current consumption from $U_L$	typ. 165 mA
	max. 225 mA (all connections of the serial interface are short-circuited)

### Electrical isolation

Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	RS-232 interface / 7.5 V supply (bus logics) 500 V AC 50 Hz 1 min

## Inline function terminal - IB IL RS 232-2MBD-PAC - 2862084

### Technical data

#### Electrical isolation

	RS-232 interface / 24 V supply (I/O) 500 V AC 50 Hz 1 min
	RS-232 interface / functional earth ground 500 V AC/DC 50 Hz 1 min
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min

### Classifications

#### eCl@ss

eCl@ss 4.0	27250304
eCl@ss 4.1	27250203
eCl@ss 5.0	27250304
eCl@ss 5.1	27242608
eCl@ss 6.0	27242608
eCl@ss 7.0	27242608
eCl@ss 8.0	27242608

#### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC001604

#### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

### Accessories

#### Accessories

##### Connector set

Connector set - IB IL AO/CNT-PLSET - 2732664



Connector set

## Inline function terminal - IB IL RS 232-2MBD-PAC - 2862084

### Accessories

#### Labeling panel

Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



---

### Terminal marking

Insert strip - ESL 62X10 - 0809492


Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 10 mm




---

### Drawings

Connection diagram



Dimensioned drawing

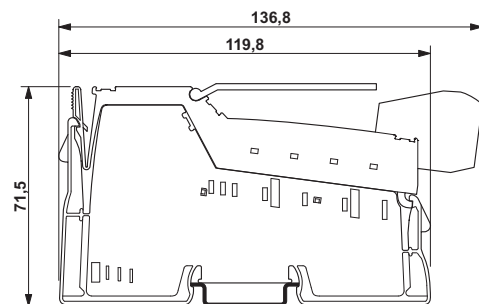

## Inline function terminal - IB IL RS 232-2MBD-PAC - 2862084

Block diagram

