

Type: **P1-25/EA/SVB-SW/N/HI11**  
 Article No.: **050740**  
 Sales text **Circuit Interruptor P1-25 (UK)**



#### Ordering information

		BME-CAT Fotos
Produktgruppen–Bezeichnung		T rotary switches, P switch-disconnectors, technical data
		Load current switches
		Main switches with auxiliary contacts and maintenance switches
Design		Flush mounting
Basic type for ... insert mounting form		P1-25/...
Mounting form		EA/SVB-SW/N/HI11
No. of poles	M	3 + N
Description		Without Emergency-Stop function

#### General


Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch disconnector according to IEC/EN 60947-3
Lifespan, mechanical	Operations	$\times 10^6$	0,3
Maximum operating frequency	Operations/h		50
Climatic proofing			Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC 60068-2-30

Ambient temperature			
Open		°C	–25...50
Enclosed		°C	–25...40
Mounting position			As required
Mechanical shock resistance to IEC 60068–2–27	Half–sinusoidal shock 20 ms	g	> 15
<b>Contacts</b>			
Rated operational voltage	$U_e$	V AC	690
Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Overvoltage category/pollution degree			III/3
Rated uninterrupted current			
open	$I_u$	A	25
Enclosed	$I_u$	A	25
Load rating with intermittent operation, class 12			
AB 25 % DF		$\times I_e$	2
AB 40 % DF		$\times I_e$	1,6
AB 60 % DF		$\times I_e$	1,3
Short–circuit rating			
Fuse		A gG/gL	25
Rated short–time withstand current (1 s current)	$I_{cw}$	A <sub>rms</sub>	640
Switching angles		°	90
Current heat loss per contact at $I_e$		W	1,1
<b>Terminal capacities</b>			
Solid or stranded		mm <sup>2</sup>	1 × (1.5 – 6) 2 × (1.5 – 6)
Flexible with ferrule to DIN 46228		mm <sup>2</sup>	1 × (1 – 4) 2 × (1 – 4)
Terminal screw			M4
Tightening torque		Nm	1.6
<b>Switching capacity</b>			
AC			
Rated making capacity cos = 0.35		A	240
Rated breaking capacity, motor load switch cos = 0.35			
230 V		A	190
400 V		A	150
500 V		A	170

690 V		A	150
Rated operational current 440 V load-break switch AC-21A	$I_e$	A	25
AC-3 motor load switch motor rating			
230 V	$P$	kW	5,5
400 V	$P$	kW	7,5
500 V	$P$	kW	7,5
690 V	$P$	kW	7,5
AC-23A Motor load switches (main switches maintenance switches)			
230 V	$P$	kW	7
400 V	$P$	kW	13
500 V	$P$	kW	11
690 V	$P$	kW	11
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	$I_e$	A	25
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	$I_e$	A	25
Contacts		Quantity	1
48 V			
Rated operational current	$I_e$	A	25
Contacts		Quantity	2
60 V			
Rated operational current	$I_e$	A	25
Contacts		Quantity	3
120 V			
Rated operational current	$I_e$	A	12
Contacts		Quantity	3
<b>Notes</b>			
<b>Notes</b>			Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft


The rated uninterrupted current  $I_u$  is stated at max. connected cross-section. For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.

## Dimensions

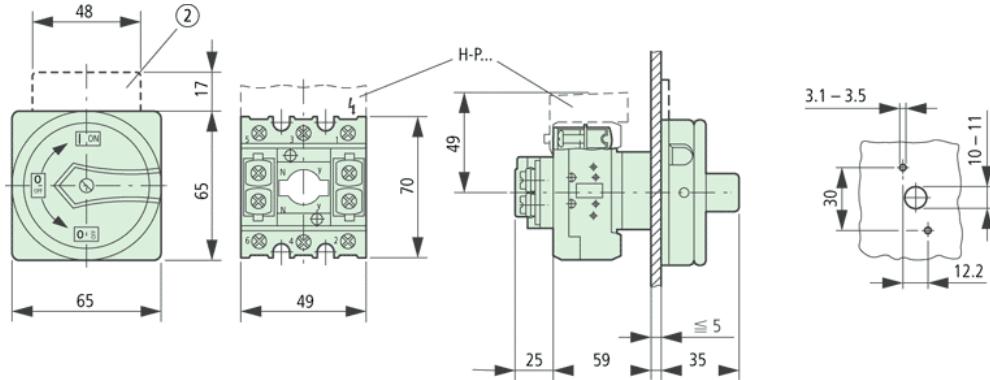


Not included

## Dimensions

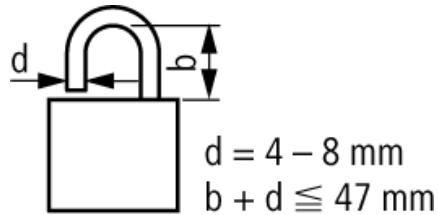

3 padlocks

## Characteristic curve

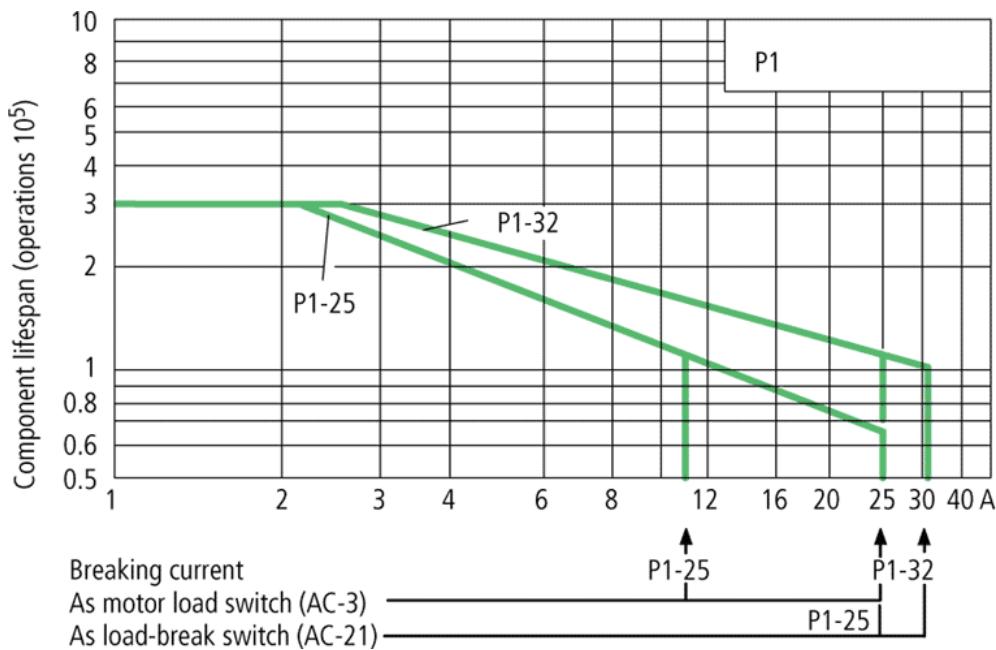


---

For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging)  
The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A  
to ensure a reasonable device lifespan.

---

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn  
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>  
HPL-C2007G V2.1 © 2007 by Moeller GmbH