





# **DP86**

### **SPECIFICATIONS**

- 316L SS
- Wet/Wet Differential
- Low Pressure

# **FEATURES**

- O-Ring Mount
- Up to -40°C to +125°C Operating Range
- Up to ±0.1% Pressure Non-Linearity
- Solid State Reliability
- Low Pressure

#### **APPLICATIONS**

- Level Controls
- Tank Level Measurement
- OEM Equipment
- Corrosive Fluids and Gas Measurement Systems
- Flow Measurements

The DP86 differential pressure sensor is a double-sided, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing designed for O-ring mounting applications. The sensing package utilizes silicone oil to transfer pressure from the two 316L stainless steel diaphragms to a single sensing element.

The DP86 is designed for high performance, low pressure applications where differential pressure measurement is required. The stainless steel package makes it suitable for use in liquids and corrosive environments.

Please refer to the DP86 uncompensated, non-silicone oil, constant current and constant voltage (fittings and cable design) for more information on different features of the DP86.

# STANDARD RANGES

Range	psid
0 to 1	•
0 to 5	•
0 to 15	•
0 to 30	•
0 to 50	•
0 to 100	•
0 to 300	•
0 to 500	•



## PERFORMANCE SPECIFICATIONS

	Unless otherwise specified,	Supply Current:	1.5mA; Ambient Tem	perature: 25°C
--	-----------------------------	-----------------	--------------------	----------------

PARAMETERS	001PSI		005PSI		≥015PSI			UNITS	NOTES		
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNITS	NOTES
Sensitivity	9.0		20.0	12.5	19.5	26.5	13.2	20	26.5	mV/V@FS	
Zero Pressure Output	-4.0		8.0	-6.0		8.0	-6.0		8.0	mV/V	1
Pressure Non-Linearity	-0.30		0.30	-0.20		0.20	-0.10		0.10	%Span	2
Pressure Hysteresis	-0.10		0.10	-0.10		0.10	-0.05		0.05	%Span	
Input/Output Resistance	4.4		6.2	3.8	4.4	5.8	3.8	4.4	5.8	kΩ	
Temp. Coefficient – Span	-3300	-2800	-2300	-1650	-1250	-1000	-1450	-1250	-1000	ppm/°C	3
Temp. Coefficient – Offset		1			1			1		μV/V/°C	3
Temp. Coefficient – Resistance	2600	3200	3500	1300	1510	1750	1300	1510	1750	ppm/°C	3
Thermal Hysteresis – Span	-0.25		0.25	-0.25		0.25	-0.25		0.25	%Span	3
Thermal Hysteresis – Offset	-0.25		0.25	-0.25		0.25	-0.25		0.25	%Span	3
Line (Common Mode) Pressure			1000			1000			1000	psi	
Line Pressure Effect on Zero			4.0			0.8			0.5	%Span/1kpsi	
Pressure Overload			10X			3X			3X	Rated	4
Pressure Burst			12X			4X			4X	Rated	5
Operating Temperature	-40		+85	-40		+125	-40		+125	ōС	6
Storage Temperature	-40		+125	-40		+125	-40		+125	ōС	6
Vibration (10~2000Hz)			20			20			20	g	
Insulation Resistance (50V <sub>DC</sub> )	50			50			50			МΩ	7
Output Load Resistance	5			5			5			ΜΩ	8
Supply Voltage		5.0	12.0		5.0	9.5		5	9.5	V	
Supply Current			2.0			1.5			1.5	mA	
Voltage Breakdown			500			500			500	$V_{RMS}$	9
Endurance (FS @ 25°C)					1,000,000					Cycles	

Media Compatibility -

Pressure Port


All fluids and gases compatible with 316L Stainless Steel & Nitrile

#### Notes

- 1. Measured at ambient.
- 2. Best fit straight line
- 3. Over the temperature range -20°C to +85°C (0°C to 50°C for 1psi, 0°C to 70°C for 5psi) with respect to 25°C.
- 4. For high-end port, rated or 1000psi whichever is less; for low-end port, rated or 150psi whichever is less. The maximum pressure that can be applied without changing the transducer's performance or accuracy.
- 5. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
- 6. Temperature range for cable and connector is -20°C to +105°C.
- 7. Between case and sensing element.
- 8. Load resistance to reduce measurement errors due to output loading.
- 9. At dry air.
- Direct mechanical contact with diaphragm is prohibited. Diaphragm surface must remain free of defects (scratches, punctures, fingerprints, etc.) for device to operate properly. Caution is advised when handling parts with exposed diaphragms. Use protective cap whenever devices are not in use.
- 11. Shipping:
  - The Stainless Steel diaphragm is protected by a static dissipative cap, each unit is packaged individually in a 2.5" plastic vial with antistatic foam, cable assembly included in vial.
- Marking
  - Device is identified with model number with Pressure Range, Type, Lot Number, Serial Number and Date Code.




## **DIMENSIONS**

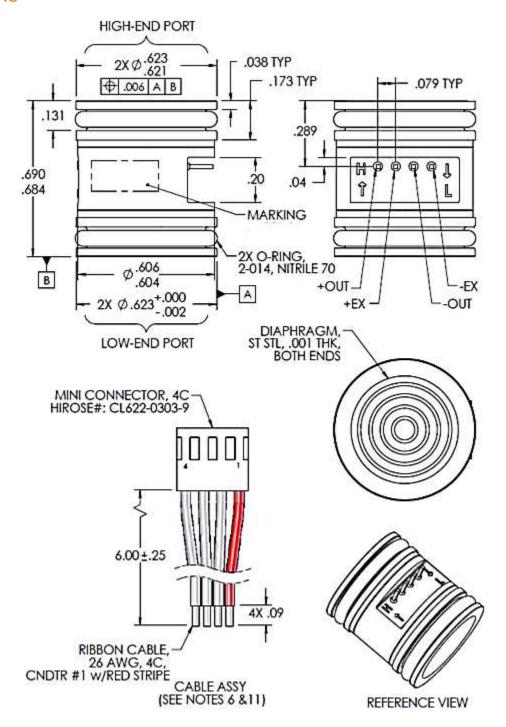




## **COMPENSATION SCHEMATIC**

(Sensors can be compensated using the schematic to get improved performance. A calibration data sheet is included with each unit that provides measured values along with resistor values that will achieve the calculated compensated performance.)

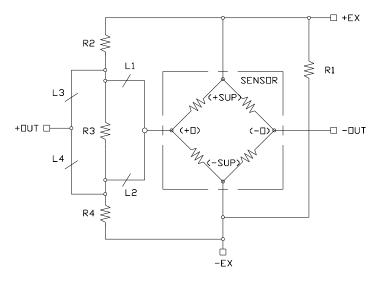

#### ORDERING INFORMATION

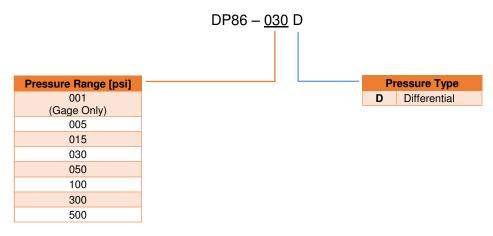

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity Company Tel: +1 800-522-6752

Email: customercare.frmt@te.com

#### **EUROPE**

Measurement Specialties (Europe), Ltd., a TE Connectivity Company Tel: +31 73 624 6999

Email: <a href="mailto:customercare.lcsb@te.com">customercare.lcsb@te.com</a>

### ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: +86 0400-820-6015

Email: <a href="mailto:customercare.shzn@te.com">customercare.shzn@te.com</a>

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved