

RAY26P-24162330A00

Reflex Array

MULTITASK PHOTOELECTRIC SENSORS





Ordering information

| Туре | Part no. |
|--------------------|----------|
| RAY26P-24162330A00 | 1221060 |

Other models and accessories → www.sick.com/Reflex_Array

Illustration may differ





Detailed technical data

Features

| Sensor/ detection principle | Photoelectric retro-reflective sensor, autocollimation Reflex Array |
|-------------------------------------|--|
| Dimensions (W x H x D) | 24.6 mm x 82.5 mm x 53.3 mm |
| Housing design (light emission) | Rectangular |
| Minimum object size | 3 mm, position-independent detection within the light array (factory setting) ¹⁾ 5 mm, position-independent detection within the light array ¹⁾ 10 mm, position-independent detection within the light array ¹⁾ |
| Detection height | 55 mm |
| Sensing range max. | 0 m 2 m ^{2) 3)} 0 m 3 m ^{2) 4)} 0 m 4.5 m ^{2) 5)} |
| Distance of the sensor to reflector | ≥ 0 m |
| Conveyor belt suppression | Manual, via IO-Link |
| Type of light | Visible red light |
| Light source | PinPoint LED ⁶⁾ |

 $^{^{1)}}$ Adjustable via IO-Link incl. adjustable conveyor belt suppression.

²⁾ Reflector PL80A.

³⁾ At minimum object size 3 mm.

 $^{^{4)}}$ At minimum object size 5 mm.

⁵⁾ At minimum object size 10 mm.

 $^{^{6)}}$ Average service life: 100,000 h at T_U = +25 °C.

| Light spot size (distance) | 55 mm x 9 mm (1 m) |
|----------------------------|--|
| Wave length | 635 nm |
| Adjustment | BluePilot: Teach-in IO-Link |
| Pin 2 configuration | External Input (test), Teach-in, switching signal |
| AutoAdapt | ✓ |
| Special applications | Detecting objects with position tolerances, Detecting perforated objects, Detecting uneven, shiny objects, Detecting transparent objects, Detecting flat objects |

 $^{^{1)}\,\}mathrm{Adjustable}$ via IO-Link incl. adjustable conveyor belt suppression.

Mechanics/electronics

| Supply voltage | 10 V DC 30 V DC ¹⁾ |
|----------------------------------|---|
| Ripple | ≤ 5 V _{pp} |
| Current consumption | 25 mA ²⁾ 40 mA ³⁾ |
| Switching output | PUSH/PULL PNP NPN |
| Output: Q _{L1} / C | Switching output or IO-Link mode |
| Output function | Factory setting: Pin 2 / white (MF): NPN normally closed (light switching), PNP normally open (dark switching), Pin 4 / black (QL1 / C): NPN normally open (dark switching), PNP normally closed (light switching), IO-Link |
| Switching mode | Light/dark switching |
| Switching mode selector | Via IO-Link |
| Signal voltage PNP HIGH/LOW | Approx. V _S – 2.5 V / 0 V |
| Signal voltage NPN HIGH/LOW | Approx. VS / < 2.5 V |
| Output current I _{max.} | ≤ 100 mA |
| Response time | ≤ 3 ms ⁴⁾ |
| Switching frequency | 170 Hz ⁵⁾ |
| Connection type | Male connector M12, 4-pin |
| Circuit protection | A ⁶⁾ B ⁷⁾ C ⁸⁾ |

¹⁾ Limit values.

²⁾ Reflector PL80A.

³⁾ At minimum object size 3 mm.

⁴⁾ At minimum object size 5 mm.

⁵⁾ At minimum object size 10 mm.

 $^{^{6)}}$ Average service life: 100,000 h at T_U = +25 °C.

 $^{^{2)}}$ 16 V DC ... 30 V DC, without load.

 $^{^{\}rm 3)}$ 10 V DC ... 16 V DC, without load.

⁴⁾ Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.

 $^{^{5)}}$ With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.

 $^{^{6)}}$ A = V_S connections reverse-polarity protected.

 $^{^{7)}}$ B = inputs and output reverse-polarity protected.

⁸⁾ C = interference suppression.

⁹⁾ D = outputs overcurrent and short-circuit protected.

 $^{^{10)}}$ Avoid condensation on the front screen of the sensor and on the reflector.

 $^{^{11)}}$ Allowed temperature change after Teach +/- 20 K.

| | D 9) |
|-------------------------------|----------------------------------|
| Protection class | III |
| Weight | 80 g |
| Housing material | Plastic, VISTAL® |
| Optics material | Plastic, PMMA |
| Enclosure rating | IP66 IP67 |
| Ambient operating temperature | -40 °C +60 °C ^{10) 11)} |
| Ambient storage temperature | -40 °C +75 °C |
| UL File No. | NRKH.E181493 & NRKH7.E181493 |

¹⁾ Limit values.

Safety-related parameters

| MTTF _D | 709 years |
|-------------------|-----------|
| DC _{avg} | 0% |

Communication interface

| Communication interface | IO-Link V1.1 |
|--------------------------------|--|
| Communication Interface detail | COM2 (38,4 kBaud) |
| Cycle time | 2.3 ms |
| Process data length | 16 Bit |
| Process data structure | Bit 0 = switching signal Q_{L1} Bit 1 = switching signal Q_{L2} Bit 2 15 = empty |
| VendorID | 26 |
| DeviceID HEX | 0x800217 |
| DeviceID DEC | 8389143 |

Smart Task

| Smart Task name | Base logics |
|-----------------|---------------------------------|
| Logic function | Direct AND OR Window Hysteresis |
| Timer function | Deactivated On delay |

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated")

 $^{^{2)}}$ 16 V DC ... 30 V DC, without load.

 $^{^{3)}}$ 10 V DC ... 16 V DC, without load.

⁴⁾ Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.

⁵⁾ With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.

 $^{^{6)}}$ A = V_S connections reverse-polarity protected.

⁷⁾ B = inputs and output reverse-polarity protected.

⁸⁾ C = interference suppression.

⁹⁾ D = outputs overcurrent and short-circuit protected.

 $^{^{}m 10)}$ Avoid condensation on the front screen of the sensor and on the reflector.

 $^{^{11)}}$ Allowed temperature change after Teach +/- 20 K.

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

| | Off delay ON and OFF delay Impulse (one shot) |
|----------------------------------|--|
| Inverter | Yes |
| Switching frequency | SIO Direct: 170 Hz ¹⁾ SIO Logic: 170 Hz ²⁾ IOL: 170 Hz ³⁾ |
| Response time | SIO Direct: 3 ms $^{1)}$ SIO Logic: 3 ms $^{2)}$ IOL: 3 ms $^{3)}$ |
| Repeatability | SIO Direct: 1,5 ms $^{1)}$ SIO Logic: 1,5 ms $^{2)}$ IOL: 1,5 ms $^{3)}$ |
| Switching signal Q _{L1} | Switching output |
| Switching signal Q _{L2} | Switching output |

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

Classifications

| ECI@ss 5.0 | 27270902 |
|----------------|----------|
| ECI@ss 5.1.4 | 27270902 |
| ECI@ss 6.0 | 27270902 |
| ECI@ss 6.2 | 27270902 |
| ECI@ss 7.0 | 27270902 |
| ECI@ss 8.0 | 27270902 |
| ECI@ss 8.1 | 27270902 |
| ECI@ss 9.0 | 27270902 |
| ECI@ss 10.0 | 27270902 |
| ECI@ss 11.0 | 27270902 |
| ETIM 5.0 | EC002717 |
| ETIM 6.0 | EC002717 |
| ETIM 7.0 | EC002717 |
| UNSPSC 16.0901 | 39121528 |


Connection diagram

Cd-390

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.


 $^{^{3)}}$ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Light spot size

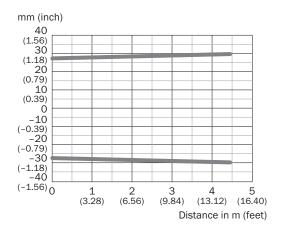


Sensing range diagram

Sensing range diagram (MDO 3 mm)

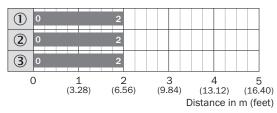


- Sensing range
- ① Reflector PL80A
- ② Reflector PL81
- 3 Reflector PL100

Sensing range diagram (MDO 10 mm)

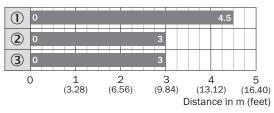


- Sensing range
- ① Reflector PL80A
- ② Reflector PL81
- 3 Reflector PL100


Sensing range diagram (MDO 5 mm)

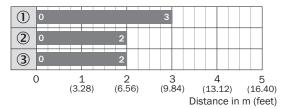

- Sensing range
- ① Reflector PL80A
- ② Reflector PL81
- 3 Reflector PL100

Dimensional drawing (Dimensions in mm (inch))

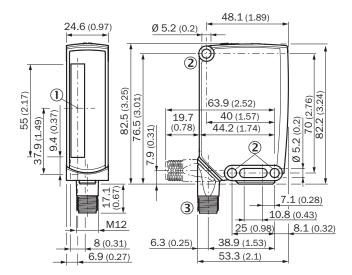



- ① Center of optical axis
- ② Mounting hole, Ø 5.2 mm
- ③ Connection
- ④ BluePilot blue: AutoAdapt indicator during run mode
- ⑤ Teach-in button
- ⑥ LED indicator yellow: Status of received light beam
- ① LED indicator green: Supply voltage active

Recommended accessories

Other models and accessories → www.sick.com/Reflex_Array

| | Brief description | Туре | Part no. |
|------------------------------|---|------------------------|----------|
| Mounting brackets and plates | | | |
| | Mounting bracket, steel, zinc coated, mounting hardware included | BEF-WN-W23 | 2019085 |
| Plug connecto | ors and cables | | |
| | Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF2A14- 050VB3XLEAX | 2096235 |
| | Head A: male connector, M12, 4-pin, straight Head B: - Cable: unshielded | STE-1204-G | 6009932 |
| Reflectors | | | |
| | Rectangular, screw connection, 80 mm x 80 mm, PMMA/ABS, Screw-on, 2 hole mounting | PL80A | 1003865 |

Recommended services

Additional services → www.sick.com/Reflex_Array

| | Туре | Part no. |
|--|------------------------|------------|
| Function Block Factory | | |
| • Brief description: The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&R. More information on the FBF can be found here . | Function Block Factory | On request |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

