

A9 SERIES


LARGE MUSHROOM HEAD PUSHBUTTON SWITCHES

Panel cut-out $\varnothing 30$

A pushbutton assembly requires:


Screen + Lamp (if illuminated) + Operator + Switchblock.

To order these elements, select desired model number from the table below

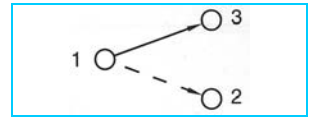

Example: Pushbutton, round, illuminated, sealed to IP65, momentary, single pole, 12 v blue Led

= Order code **A9PCA1Y1FIJ4**

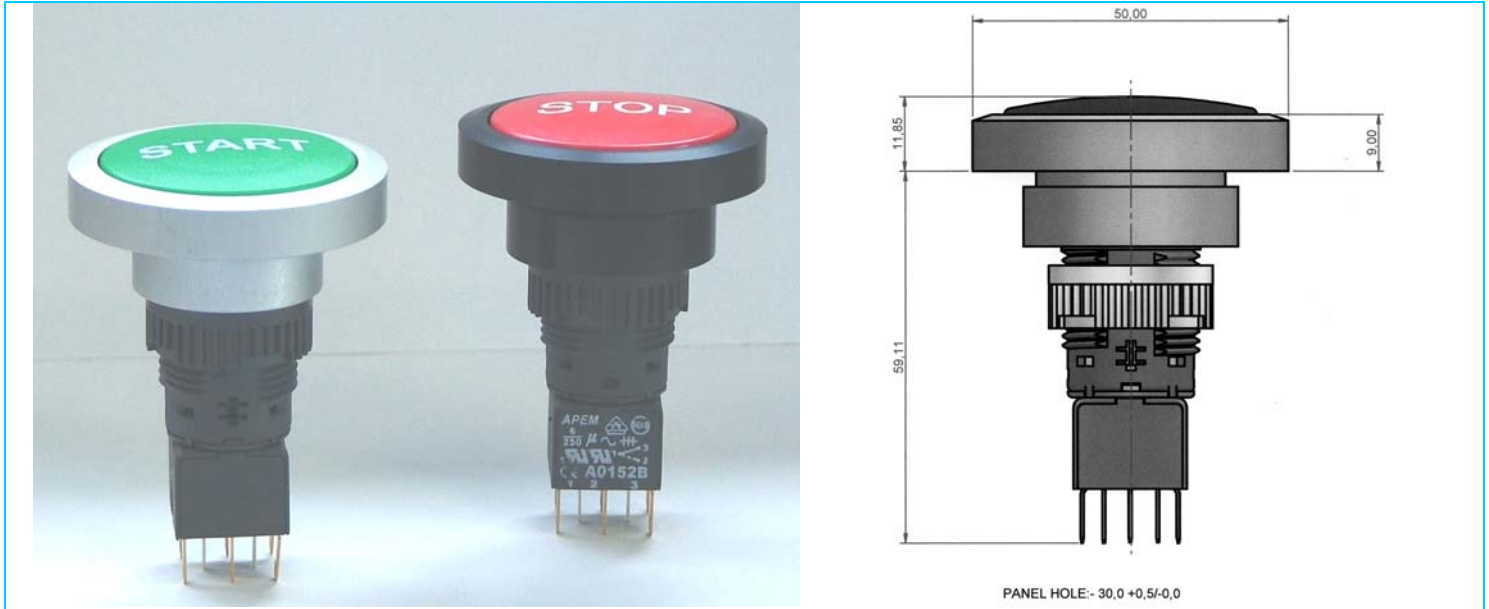

A9						
Switch Type	Bezel	Illumination	Sealing	Function	Switch Block	
P - pushbutton I - indicator	C - round	A - illuminated B - non-illuminated	0 - unsealed 1 - sealed IP65	0 - Indicator X - latching Y - momentary	0 - indicator 1 - single pole 2 - double pole 5 - three pole 3 - four pole	

Screen Options*	Bulbs	Bulbs continued	Bezel Finish
AB - black non illuminated BB - red non illuminated OB - yellow non illuminated EB - green non illuminated FB - blue non illuminated	A1 - filament 6,3v B1 - filament 14v C1 - filament 28v D1 - filament 36v E1 - filament 48v F1 - filament 60v G1 - Neon 110v H1 - Neon 220v I1 - Led 6v red I2 - Led 6v green I3 - Led 6v amber J1 - Led 12v red J2 - Led 12v green J3 - Led 12v amber J4 - Led 12v blue J5 - Led 12v white K1 - Led 24v red K2 - Led 24v green K3 - Led 24v amber K4 - Led 24v blue	K5 - Led 24v white L1 - Led 48v red L2 - Led 48v green L3 - Led 48v amber	Blank - (STD) Silver G- Black
* For Screen Engraving options Contact Apem Components.			