Ordering information

GHA300F

A 300





Example recommended EMI/EMC filter EAC-10-472



High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. ①Series name ②Single output 3 Output wattage 4 Universal input 5 Output voltage

®Optional *6 T3: mounting hole M3 J1: VH(J.S.T.)connector type R3: with Subfeatures (5VAUX,12VAUX,Remote, Power good)

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL			GHA300F-12	GHA300F-24	GHA300F-48
MAX OUTPUT WATTAGE[W]		300	300	302.4	
	Forced air	at 50°C	12V 25A	24V 12.5A	48V 6.3A
DC OUTPUT	Convection	at 40°C	12V 8.4A	24V 4.2A	48V 2.1A
	Convection	at 50°C	12V 4.5A	24V 2.2A	48V 1.1A

	MODEL		GHA300F-12	GHA300F-24	GHA300F-48				
	VOLTAGE[V]		AC90 - 264 1 ϕ (output derating is	required at AC90V -115V *3)					
	CURRENT[A]	ACIN 120V	3.3typ						
		ACIN 230V							
	FREQUENCY[Hz]		50 / 60 (47 - 63)						
INPUT	EFFICIENCY[%]	ACIN 120V		90typ	90typ				
		ACIN 230V		92typ	92typ				
	POWER FACTOR		0.95typ						
	(lo=100%)								
	INRUSH CURRENT[A]	ACIN 120V	20typ (Io=100%) (At cold start) (Ta=25℃)						
		ACIIV 230V	40typ (Io=100%) (At cold start) (Ta=25°C)						
	LEAKAGE CURREN	T[mA]		V 60Hz,lo=100%, According to IEC6					
	VOLTAGE[V]		12	24	48				
	CHERENIA	Forced air		12.5	6.3				
		Convection		2.2	1.1				
	LINE REGULATION[48max	96max	192max				
	LOAD REGULATION			150max	240max				
	RIPPLE[mVp-p] *1		240max	240max	300max				
			320max	320max	400max				
OUTPUT	RIPPLE NOISE[mVp-p]*1		300max	300max	480max				
			360max	360max	500max				
	TEMPERATURE REGULATION[mV]		120max 150max	240max 290max	480max 600max				
	DDIETI	*2 *2	48max	1 = 0 = 0 = 0 = 0					
	DRIFT[mV]		500typ (ACIN 120V, lo=100%)	96max	192max				
	START-UP TIME[ms]		16tvp (ACIN 120V, 10=100%)						
	HOLD-UP TIME[ms] OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	21.60 to 26.40	43.20 to 52.80				
	OUTPUT VOLTAGE SET		12.00 to 12.48	24.00 to 24.96	48.00 to 49.92				
	OVERCURRENT PROT				40.00 to 43.32				
	OVERVOLTAGE PROTE		Works over 105% of rating and recovers automatically 13.80 to 16.80 27.60 to 33.60 55.20 to 67.20						
PROTECTION	ALIV1 (12V/1A)	OTION[V]	13.80 to 16.80						
CIRCUIT AND	AUX2 (5V1A)		Optional						
OTHERS	REMOTE ON/OFF		Optional						
	PowerGood		Ottional						
	INPUT-OUTPUT · RC	· AUX *7							
	INPUT-FG	71071	AC2,000V 1minute. Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP						
ISOLATION	OUTPUT · RC · AUX-	FG *7							
	OUTPUT-RC · AUX	*7							
	OPERATING TEMP., HUMID. AND	ALTITUDE	-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3						
ENVIDONMENT	STORAGE TEMP., HUMID. AND	ALTITUDE	-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max						
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND	AGENCY APPROVAL		UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601-1 3rd						
NOISE	CONDUCTED NOISE			SPR11-B, CISPR22-B, EN55011-B, E	N55022-B				
REGULATIONS	HARMONIC ATTENU		Complies with IEC61000-3-2 (cla						
OTHERS	CASE SIZE/WEIGHT		76.2×35×127mm [3.0×1.4×5.0						
JIIIENS	COOLING METHOD		Convection, Forced air (Require e	xternal fan)					

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.*5 Please contact us about another class.


- *6 Specification is changed at option, refer to Instruction Manual.
- Applicable when AUX and remote control (optional) is added. To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is not possible.
- Forced air cooling is required to output up to MAX OUTPUT WATTAGE.
- Bottom layer P.C.B has electric potential which is required isolation from FG by clearance or creepage as the safety design issue.




Features

- · High Power density:14.3W/inch³
- · High efficiency 92% typ (Input Voltage 230V, Output Voltage 24V)
- · 3"× 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- With Remote On/Off (Optional)
- With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

Block diagram

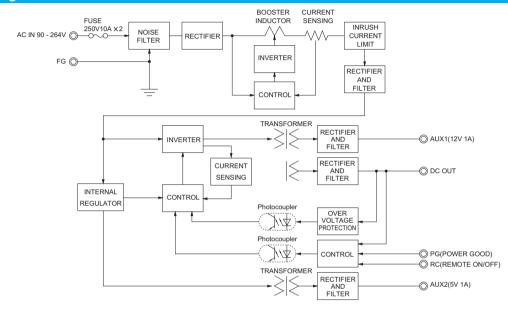

External view

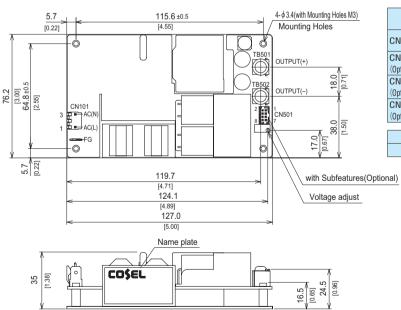

- Tolerance ±1 [±0.04]
- Weight: 400g maxThere is a total of four attachment holes.
- This power supply requires mounting on metal standoffs 5mm in height.
- (Insulating sheet is required if you do not use a spacer). Dimensions in mm, []=inches
- Screw tightening torque: (TB501, 502): 1.5N · m max
- Mounting toque: 0.6N · m max
 Avoid contact between TB501 and 502 wiring with mounting parts.
- ※ Option: -J1: (J.S.T) connector type. Refer to Instruction Manual 5.

1/0	Connector	Mating connector	Terminal	Mfr	
CN101	A-41671-A03A197-2	09-50-8031	08-50-0105 08-65-0114	MOLEV	
CN501 (Optional)	087831-0820	51110-0851	50394-8051	MOLEX	
CN101 (Optional)	B2P3-VH	VHR-3N	SVH-21T-P1.1	J.S.T.	
CN501 (Optional)	B8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	J.O. I.	

FG		Mating connector	Terminal	Mfr
-	250 Series	-	170603-2	Tyco Electronics

<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

<CN501(Optional)>

(Optional)>				
Pin No.	Function			
1	AUX1 : AUX1 (12V1A)			
2	AUX1G: AUX1 (GND)			
3	RC : REMOTE ON/OFF			
4	RCG : REMOTE ON/OFF (GND)			
5	PG : Power good			
6	PGG : Power good (GND)			
7	AUX2 : AUX2 (5V1A)			
8	AUX2G: AUX2 (GND)			
	•			



CN501

Ordering information

GHA50

A 500







High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. 1) Series name 2) Single output 3) Output wattage 4) Universal input 5) Output voltage

®Optional *6 T3: mounting hole M3
J1: VH(J.S.T.)connector type
R3: with Subfeatures
(5VAUX,12VAUX,Remote,
Power good)

P : Pallarel Operation

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL			GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56
MAX OUTPUT WATTAGE[W]			500.4	501	504	501	504	504
	Forced air		12V 41.7A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A
	Convection	at 40°C	12V 12.5A	15V 10.0A	24V 6.3A	30V 5.0A	48V 3.2A	56V 2.7A
DC OUTPUT		at 50°C	12V 9.2A	15V 7.4A	24V 4.6A	30V 3.7A	48V 2.3A	56V 1.9A
	conduction	at 0°C	12V 30.0A	15V 24.0A	24V 15.0A	30V 12.0A	48V 7.5A	56V 6.4A
	cooling	at 50°C	12V 16.7A	15V 13.4A	24V 8.4A	30V 6.7A	48V 4.2A	56V 3.6A

	MODEL		GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56			
	VOLTAGE[V]		AC90 - 264 1 φ (output derating is required at AC90V -115V *3)								
	ACIN 120V										
	CURRENT[A]	ACIN 230V									
ĺ	FREQUENCY[Hz]		50 / 60 (47 - 63)								
	EFFICIENCY[%]	ACIN 120V	88typ								
INPUT	EFFICIENCY[%]	ACIN 230V	90typ	92typ	92typ	92typ	92typ	92typ			
ſ		ACIN 120V									
	(lo=100%)										
	INRUSH CURRENT[A]	ACIN 120V) (At cold start) (T							
		ACIN 230V) (At cold start) (T							
	LEAKAGE CURREN	T[mA]				According to IEC6					
	VOLTAGE[V]		12	15	24	30	48	56			
		Forced air		33.4	21.0	16.7	10.5	9.0			
	CURRENT[A]	Convection		7.4	4.6	3.7	2.3	1.9			
		conduction cooling		13.4	8.4	6.7	4.2	3.6			
	LINE REGULATION[1011107	60max	96max	120max	192max	192max			
	LOAD REGULATION			120max	150max	180max	240max	240max			
	RIPPLE[mVp-p] *1		240max	240max	240max	300max	300max	400max			
	==[vp p]		320max	320max	320max	400max	400max	500max			
OUTPUT	RIPPLE NOISE[mVp-p]*1		300max	300max	300max	480max	480max	500max			
	TILL TEE ITOIOE[IIIT P P]		360max	360max	360max	500max	500max	580max			
	TEMPERATURE REGULATION(mV)		120max	150max	240max	300max	480max	480max			
			150max	180max	290max	360max	600max	600max			
	DRIFT[mV] *2			60max	96max	120max	192max	192max			
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%) 16typ (ACIN 120V, Io=100%)								
	HOLD-UP TIME[ms]				04 00 1 00 40	07.00 04.50	40.00 50.00	F0.00 F0.00			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00			
	OUTPUT VOLTAGE SET		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	30.00 to 31.20	48.00 to 49.92	55.00 to 56.00			
	OVERCURRENT PROT				covers automatica		EE 00 to 07 00	CO 00 to CO 00			
PROTECTION	OVERVOLTAGE PROTEC	TION[V]	13.80 to 16.80 17.25 to 21.00 27.60 to 33.60 34.50 to 42.00 55.20 to 67.20 60.00 to 69.00								
CIRCUIT AND	AUX1 (12V1A) AUX2 (5V1A)		Optional								
OTHERS	REMOTE ON/OFF		Optional								
	PowerGood		Optional Optional								
	INPUT-OUTPUT · RC	ALIV #7									
}	INPUT-FG	AUX */	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP								
ISOLATION	OUTPUT · RC · AUX-	FG *7									
ŀ	OUTPUT-RC · AUX	*7									
	OPERATING TEMP., HUMID.AND										
ŀ	STORAGE TEMP., HUMID.AND										
ENVIRONMENT	VIBRATION	ALITIONE									
ŀ	IMPACT		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis 196.1m/s² (20G), 11ms, once each X, Y and Z axis								
SAFETY AND	AGENCY APPROVAL	S				0-1 CAN/CSA606	01-1), EN60950-1	FN60601-1 3rd			
	CONDUCTED NOISE		Complies with Fo	CC-B VCCI-B CIS	SPR11-B CISPR22	P-B FN55011-B F	N55022-B	255557 7 614			
-			Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B								
NOISE			Complies with IF	-C61000-3-2 (clas	ss A) *5		Complies with IEC61000-3-2 (class A) *5 76.2×35×127mm [3.0×1.4×5.0 inches] (W×H×D) / 420g max				
NOISE	HARMONIC ATTENU	JATOR)) / 420g max					

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- Please contact us about dynamic load and input response.
- *5 Please contact us about another class.


- Specification is changed at option, refer to Instruction Manual.
- Applicable when AUX and remote control (optional) is added.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual. Forced air cooling is required to output up to MAX OUTPUT WATTAGE.




Features

- · Wattage 500W max
- · High Power density:24.1W/inch3
- · High efficiency 92% typ (Input Voltage 230V,Output Voltage 24V)
- · Conduction cooling
- 3 " × 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- · With Remote On/Off (Optional)
- · With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

Block diagram

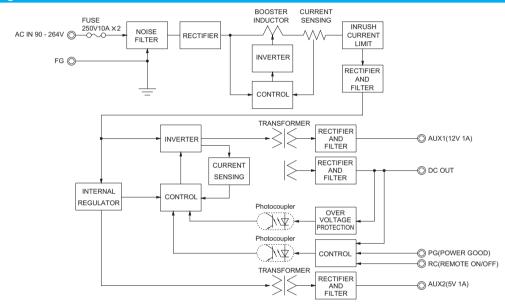

External view

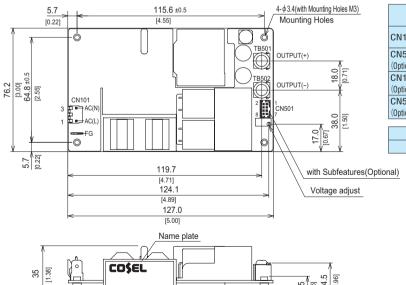

Ж	Tolerance	±1	$[\pm 0.04]$

- Weight: 420g max
- There is a total of four attachment holes.
- Base Plate : Aluminum
 Dimensions in mm, []=inches
- Screw tightening torque : (TB501, 502) : 1.5N · m max
- Mounting toque: 0.6N · m max
 Avoid contact between TB501 and 502 wiring with mounting parts.
- Option : -J1 : (J.S.T) connector type. Refer to Instruction Manual 5.

Mating I/OConnector Terminal Mfr connector 08-50-0105 08-65-0114 CN101 A-41671-A03A197-2 09-50-8031 MOLEX CN501 087831-0820 50394-8051 51110-0851 (Optional) CN101 B2P3-VH VHR-3N SVH-21T-P1.1 (Optional) J.S.T. CN501 **B8B-PHDSS** PHDR-08VS SPHD-002T-P0.5 (Optional

	FG	Mating connector	Terminal	Mfr	
-	250 Series	-	170603-2	Tyco Electronics	

<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

<CN501(Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)



CN501

GHA300F-SNF

A 300





High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1) Series name 2) Single output 3) Output wattage 4) Universal input 5) Output voltage ®Optional *6

J1: CN501 PH(J.S.T.)connector type

Refer to the instruction manual

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF	
MAX OUTPUT WATTAGE[W]		300	300	302.4	
DC OUTPUT	Forced air +50°C	12V 25.0A	24V 12.5A	48V 6.3A	

	MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF			
	VOLTAGE[V]		AC90 - 264 1 ϕ (output derating is required at AC90V -115V *3)					
INPUT	ACIN 120V							
	CURRENT[A]	ACIN 230V	1.8typ					
	FREQUENCY[Hz]		50 / 60 (47 - 63)					
	EFFICIENCY[%]	ACIN 120V	88typ 89typ 89typ					
		ACIN 230V	90typ	91typ	91typ			
	POWER FACTOR	ACIN 120V	0.95typ					
	(lo=100%)	ACIN 230V						
	INRUSH CURRENT[A]	ACIN 120V	20typ (Io=100%) (At cold start) (Ta=25°C)					
	INKUSH CUKKENI[A]	ACIN 230V	40typ (Io=100%) (At cold start) (Ta=25℃)					
	LEAKAGE CURRENT[mA]		0.125/0.250max (ACIN 120V/240V 60Hz,Io=100%, According to IEC60601-1)					
	VOLTAGE[V]		12	24	48			
		Forced air	25.0	12.5	6.3			
	LINE REGULATION[mV] *4	48max	96max	192max			
	LOAD REGULATION[mV] *4			150max	240max			
	RIPPLE[mVp-p] *1		240max	240max	300max			
	KIPPLE[IIIVP-P]	-20 - 0℃	320max	320max	400max			
OUTPUT	RIPPLE NOISE[mVp-p]*1		300max	300max	480max			
			360max	360max	500max			
			120max	240max	480max			
	TEMPERATURE REGULATION[mV]		150max	290max	600max			
	DRIFT[mV]		48max	96max	192max			
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)					
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)					
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	21.60 to 26.40	43.20 to 52.80			
	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	24.00 to 24.96	48.00 to 49.92			
	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically *7					
PROTECTION	OVERVOLTAGE PROTECTION[V]		13.80 to 16.80	27.60 to 33.60	55.20 to 67.20			
CIRCUIT AND	AUX1		10V 0.5A					
OTHERS	AUX2		5V 1A					
	REMOTE ON/OFF		Possible, AUX2 is available					
	PowerGood		Open corrector					
	INPUT-OUTPUT · RC · AUX		AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP					
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP					
	OUTPUT · RC · AUX-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)					
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)					
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE		-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3					
	STORAGE TEMP., HUMID. AND ALTITUDE		-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max					
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT		196.1m/s ² (20G), 11ms, once each					
SAFETY AND	AGENCY APPROVAL			1, C-UL(CSA60950-1, CAN/CSA606				
NOISE	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B					
REGULATIONS	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (class A) *5					
OTHERS	CASE SIZE/WEIGHT		85.2×41×165.3mm [3.35×1.61×6.5 inches] (W×H×D) / 620g max					
CHILIIG	COOLING METHOD		Forced air					

- This is the value that measured on measuring board with capacitor of 22 $\mu\,F$ at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.*5 Please contact us about another class.


- Specification is changed at option, refer to Instruction Manual.
- When output current more than rated, output will shut down after 5 seconds or more.
- Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load




Features

- · Full packaged desin united with GHA's features and additional robastness..
- · High efficiency 91% typ (Input voltage 230V,Output voltage 24V)
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 10V 0.5A, AUX2 5V 1A)

Block diagram

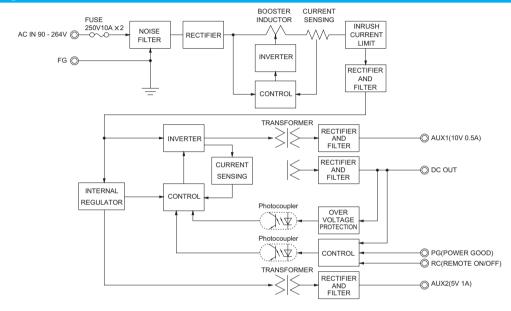

External view

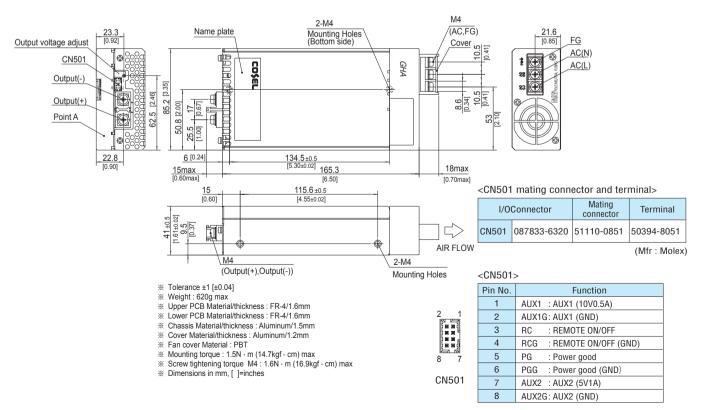

CHARGE 40 ONE CHARGOE 45 ONE CHARGOE 04 ONE CHARGOE 00 ONE CHARGOE 40 ONE CHARGOE 50 ONE

GHA500F-SN

A 500



Example recommended EMI/EMC filter EAC-10-472

High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1) Series name 2) Single output 3) Output wattage 4) Universal input 5) Output voltage

®Optional *6 J1: CN501

PH(J.S.T.)connector type P : Pallarel Operation

Refer to the instruction manual

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF
MAX OUTPUT WATTAGE[W]		450	501	504	501	504	504
DC OUTPUT	Forced air +50°C	12V 37.5A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A

	MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF	
	VOLTAGE[V]		AC90 - 264 1 φ (output derating is required at AC90V -115V *3)						
INPUT	CURRENT[A]	ACIN 120V	4.8typ 5.4typ						
	CONNENT[A]	ACIN 230V	2.6typ 2.9typ						
	FREQUENCY[Hz]		50 / 60 (47 - 63)						
	POWER FACTOR (Io=100%) INRUSH CURRENT[A]	ACIN 120V	87typ	89typ	89typ	89typ	89typ	89typ	
		ACIN 230V	89typ	91typ	91typ	91typ	91typ	91typ	
		ACIN 120V	1 c.o.c.9 k						
			0.90typ						
		ACIN 120V	20typ (Io=100%) (At cold start) (Ta=25℃)						
		ACIN 230V	40typ (Io=100%) (At cold start) (Ta=25℃)						
	LEAKAGE CURREN	T[mA]	0.125/0.250max (ACIN 120V/240V 60Hz,Io=100%, According to IEC60601-1)						
	VOLTAGE[V]		12	15	24	30	48	56	
	CURRENT[A]	Forced air	37.5	33.4	21.0	16.7	10.5	9.0	
	LINE REGULATION[48max	60max	96max	120max	192max	192max	
	LOAD REGULATION[mV] *4		100max	120max	150max	180max	240max	240max	
	RIPPLE[mVp-p] *1 RIPPLE NOISE[mVp-p]*1		240max	240max	240max	300max	300max	400max	
OUTPUT			320max	320max	320max	400max	400max	500max	
		0 to +50℃		300max	300max	480max	480max	500max	
	TIII T EE NOIGE[IIIVP P]	-20 - 0℃	360max	360max	360max	500max	500max	580max	
	TEMPERATURE REGULATION[mV]		120max	150max	240max	300max	480max	480max	
		-20 to +50°C		180max	290max	360max	600max	600max	
	DRIFT[mV]	*2	48max	60max	96max	120max	192max	192max	
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)						
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]			13.50 to 16.50	21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00	
	OUTPUT VOLTAGE SET		12.00 to 12.48 15.00 to 15.30 24.00 to 24.96 30.00 to 31.20 48.00 to 49.92 55.00 to 56.00						
	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically *7						
PROTECTION	OVERVOLTAGE PROTECTION[V]		13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	34.50 to 42.00	55.20 to 67.20	60.00 to 69.00	
CIRCUIT AND	AUX1		12V 0.5A						
OTHERS	AUX2		5V 1A						
	REMOTE ON/OFF		Possible, AUX2 is available						
	PowerGood INPUT-OUTPUT · RC · AUX		Open corrector AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP						
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 2MOPP AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP						
ISOLATION	OUTPUT · RC · AUX-FG		AC500V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)						
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature) AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)						
	OPERATING TEMPHUMID.AND ALTITUDE		-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3						
	STORAGE TEMP., HUMID. AND ALTITUDE		-30 to +80°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max						
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND	MPACT 196.1m/s² (20G), 11ms, once each X, Y and Z axis UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601						EN60601-1 3rd		
NOISE	CONDUCTED NOISE Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B						LINGUOUT TOTA		
	HARMONIC ATTENU		Complies with IEC61000-3-2 (class A) *5						
	CASE SIZE/WEIGHT		85.2×41×165.3mm [3.35×1.61×6.5 inches] (W×H×D) / 660g max						
OTHERS	COOLING METHOD		Forced air	11111 [0.00 ^ 1.01 ^	O.O IIIOIIOS] (VV A II	ADJ / GOOG Max			
	COOLING WETHOD		i ologu ali			,			

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.*5 Please contact us about another class.

- *6 Specification is changed at option, refer to Instruction Manual.
- When output current more than rated, output will shut down after 5 seconds or more.
- Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual.


GHA500F-SNF COSEL



Features

- · Full packaged design united with GHA's features, and additional robustness..
- · High efficiency 91% typ (Input voltage 230V.Output voltage 24V)
- · 50% minimized size compares with previous products.
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 12V 0.5A, AUX2 5V 1A)

Block diagram

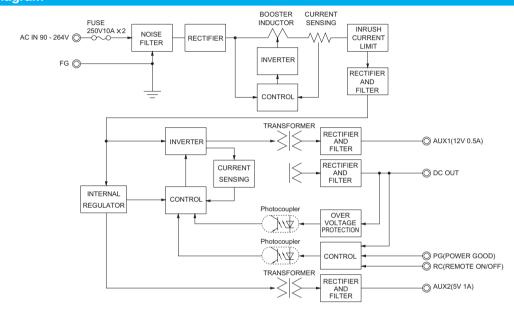

External view

