

Type: **P5-160/EA/SVB**


Article No.: **280922**



**Ordering information**

Design			Flush mounting
Description			Without auxiliary contacts
Main conducting paths No. of poles		M	3
Auxiliary contacts		N/O	0
Auxiliary contacts		B	0
Max. three-phase motor rating (per set of 3 contacts) 50-60 Hz AC-3 400/415 V 50-60 Hz	<i>P</i>	kW	55
Rated uninterrupted current	<i>I<sub>u</sub></i>	A	160
Note for table header			According to IEC/EN 60204-1, VDE 0113 Part 1; with red rotary handle and yellow locking collar, lockable in 0 position

**Contact sequence**



**General**

Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA,UL
-----------	--	--	--

			Switch-disconnectors to IEC/EN 60947-3
Lifespan, mechanical	Operations	$\times 10^6$	0,1
Maximum operating frequency	Operations/h		50
Climatic proofing			Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC 60068-2-30
Ambient temperature			
Open		°C	--25/50
Enclosed		°C	--25/40
Mounting position			As required
Documentation			Main catalogue HPL
<b>Contacts</b>			
Rated operational voltage	$U_e$	V AC	690
Rated impulse withstand voltage	$U_{imp}$	V AC	8000
Overvoltage category/pollution degree			III/3
Load-carrying capacity in intermittent operation, Class 12			
AB 25 % DF		$\times I_e$	2
AB 40 % DF		$\times I_e$	1,6
AB 60 % DF		$\times I_e$	1,3
Short-circuit rating			
Fuse		A gG/gL	125
Rated short-time withstand current (1 s current)	$I_{cw}$	$A_{rms}$	2500
Switching angles		°	90
Current heat loss per contact at $I_e$		W	8
<b>Terminal capacities</b>			
Solid or stranded		mm <sup>2</sup>	1 × (10 – 95) 2 × (10 – 35)
Flexible with ferrule to DIN 46228		mm <sup>2</sup>	1 × (16 – 70) 2 × (16 – 25)
Terminal screw			Allen screw 5
Tightening torque		Nm	14
<b>Switching capacity</b>			
AC			
Rated making capacity $\cos \phi = 0.35$		A	850
Rated breaking capacity, motor load switch $\cos \phi = 0.35$			
230 V		A	800


400 V		A	750
500 V		A	650
690 V		A	340
Rated operational current 440 V load-break switch AC-21A	$I_e$	A	125
AC-3 motor load switch motor rating			
230 V	$P$	kW	22
400 V	$P$	kW	37
690 V	$P$	kW	30
AC-23A Motor load switches (main switches maintenance switches)			
230 V	$P$	kW	30
400 V	$P$	kW	45
690 V	$P$	kW	37
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	$I_e$	A	125
Voltage per contact pair in series		V	42
DC-23A, Motor load switches L/R = 15 ms			
24 V			
Rated operational current	$I_e$	A	125
Contacts		Quantity	3
48 V			
Rated operational current	$I_e$	A	125
Contacts		Quantity	3
60 V			
Rated operational current	$I_e$	A	125
Contacts		Quantity	3
120 V			
Rated operational current	$I_e$	A	40
Contacts		Quantity	3
<b>Notes</b>			
			Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft

The rated uninterrupted current  $I_u$  is stated at max. connected cross-section. For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.


**Dimensions**

			Drilling dimensions
			3 Padlocks

**Dimensions**

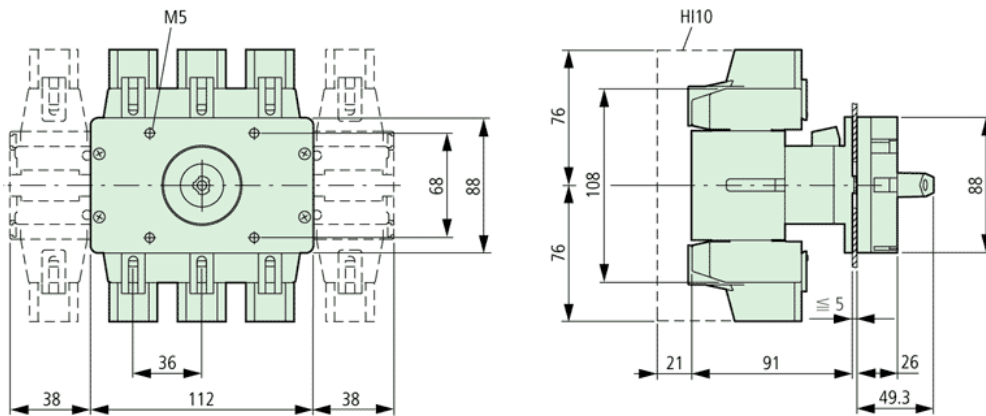

**Dimensions**

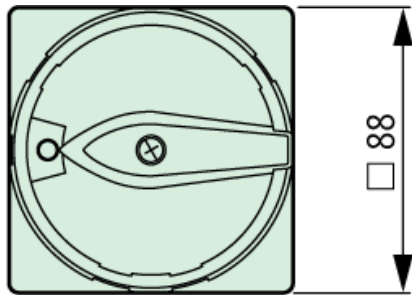

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn  
 E-Mail: [catalog@moeller.net](mailto:catalog@moeller.net), Internet: [www.moeller.net](http://www.moeller.net), <http://catalog.moeller.net>  
 Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3