

BGL 220A-001-S49
Order code: BGL0010


Slot sensor
 Series A GLOBAL
 220 mm



BALLUFF

sensors worldwide

DC, direct current
 PNP (1X)
 NO/NC: dark-on/light-on
 3000 Hz
 LED, red light

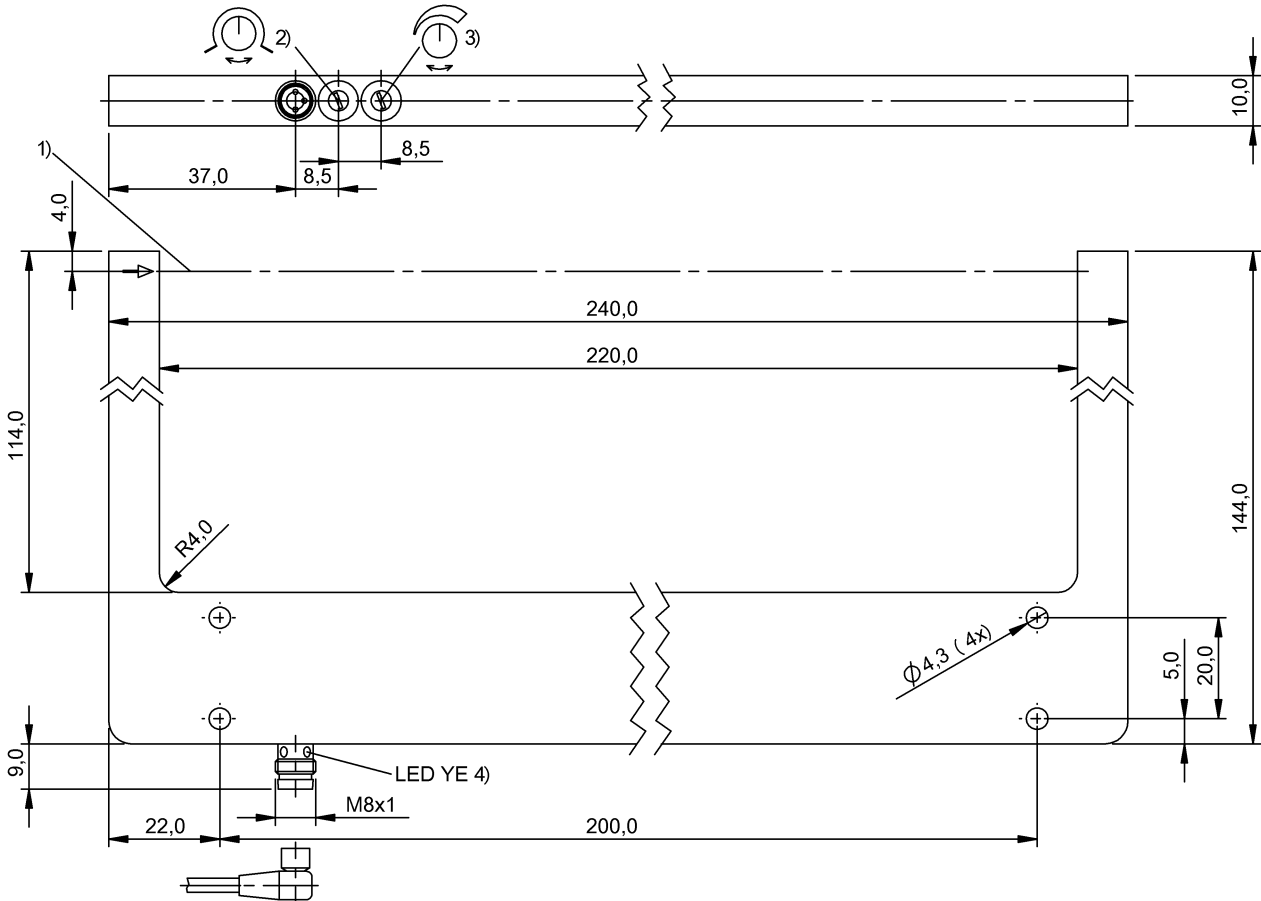

1) Optical axis 2) Sensitivity 3) Light-on / Dark-on 4) Output function

Basic data

Operating voltage UB DC	10.0 V... 30.0 V
Eff. operating voltage Ue DC	24.0 V
Ripple max. (% of Ue)	10 %
No-load current max. I _o at Ue	35 mA
Polarity reversal protected	Yes
Rated insulation voltage U _i	75 V DC
Indicator	Output function - LED YE
Adjuster	Potentiometer, 270° (2x)
Setting	Sensitivity
	Light-on/dark-on
Ambient temperature T _a	-10 °C... 60 °C

Optical data

Principle of optical operation	Through-beam
Light type	LED, red light
Wavelength	636 nm
Light spot size, typical	Ø2.5 mm light exit
Beam characteristic	Divergent
Repeat accuracy lateral max.	80 µm
Smallest part, typical	0.60 mm
Ambient light max.	5,000 Lux

Electrical data

Switching output	PNP (1X)
Switching function	NO/NC
Eff. operating current I _e	200 mA
Switching freq. f max. (at U _e)	3000 Hz
Turn on time t _{on} max.	0.333 ms
Turn off time t _{off} max.	0.333 ms
Voltage drop U _d max. (at I _e)	3.0 V
Hysteresis H max.	0.200 mm
Short circuit protected	Yes
Load capacitance max. (at U _e)	1.00 µF

Mechanical data

Style	Slot, straight connection
Fork width	220 mm
Dimensions	10.0 mm x 54.0 mm x 25.0 mm
Mounting type	Screw M4
Housing material	GD-Zn
Surface protection	Painted
Sensing face material	Glass
Degree of protec. per IEC60529	IP67
Connection type	Connector
Connector type	M8x1-S49

000000116706/156463/20131022

www.balluff.com

Balluff Germany: +49 7158 173-0, +49 7158 173-370
 Balluff USA: +1-800-543-8390
 Balluff China: +86 21 5089 9970

1 (2)
 Print Date: 18.02.2016
 Selection date: 18.02.2016

BGL 220A-001-S49
Order code: BGL0010

Slot sensor
Series A GLOBAL
220 mm

BALLUFF

sensors worldwide

DC, direct current
PNP (1X)
NO/NC: dark-on/light-on
3000 Hz
LED, red light

Approval

Approvals / Conformity CE
cULus

Remarks



Basic standard IEC 60947-5-2
The sensor is functional again after the overload has been eliminated.

Reference object (test target): Steel sheet metal, 50 x 50, thickness 0.5 mm, lateral approach.
Factory default setting for switching output: Normally open.
Only for NFPA 79 applications (machines with a supply voltage of maximum 600 volts). Device shall be connected only by using any R/C (CYJV2) cord, having suitable ratings.
For additional information, refer to user's guide.
Order accessories separately.



Definitions see general catalog

Subject to change without notice.



000000116706/156463/20131022