


BOS 18M-PI-RE30-S4 BOS01UC



1) Optical axis 2) Power/short-circuit 3) Light reception/limit area 4) Sn

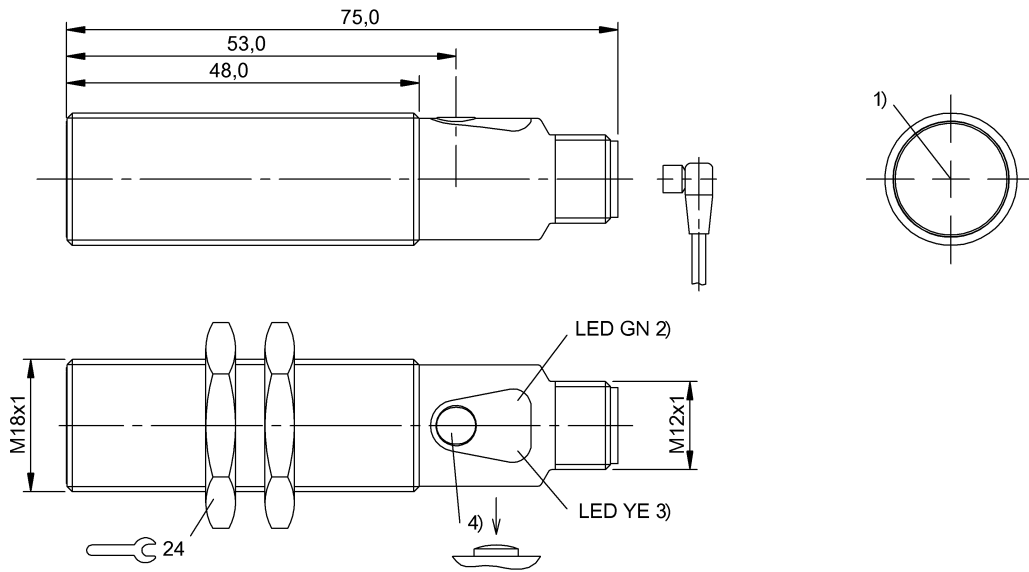

Display/Operation

Adjuster	Key (1x)
Setting	Rated switching distance (Sn) Light-on/dark-on

Electrical connection

Connection	M12x1-Connector, 4-pole, A-coded
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Baud rate	38.4 kBaud
Load capacitance max. at Ue	0.3 µF
No-load current I _o max. at Ue	40 mA
Operating voltage U _b	18...30 VDC
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage U _i	250 V AC
Rated operating current I _e DC	100 mA
Rated operating voltage U _e DC	24 V
Reference emitter	BOS 18M-X-RS30-S4 BOS 18M-XI-RS30-S4
Switching frequency	400 Hz
Turn-off delay t _{off} max.	1.25 ms
Turn-on delay t _{on} max.	1.25 ms
Utilization category	DC-13
Voltage drop U _d max. at I _e	1.5 V

Environmental conditions

Ambient temperature	-5...55 °C
Protection class	II
Protection type IEC 60529	IP67

Functional safety

Functional safety	no
-------------------	----

General data

Approval/Conformity	cULus CE
Basic standard	IEC 60947-5-2
Function class, smart sensor	Binary data channel Teach channel Diagnostics Identification
Series	18M
Style	Cylinder Straight optics

Material

Housing material	Brass
Material sensing surface	Glass
Surface protection	nickel plates

Mechanical data

Dimension	Ø 18 x 75 mm
Fastening detail	Nut M18x1
Tightening torque max.	15 Nm 30 Nm

BOS 18M-PI-RE30-S4 BOS01UC

Optical data

Ambient light max.	10000 Lux
Light type	LED Red light
Principle of optical operation	Through-beam sensor (receiver)

Output/Interface

Interface	IO-Link 1.1
Interface setting option	Key disable on/off Sensor name in application Teach method 2-point/dyn. BDC mode 1-pt./2-pt./window Light-on/dark-on
Process data cycle min.	3 ms
Process data out	Teaching active/inactive Limit range yes/no Switching state active/inactive

Switching output

PNP Normally open/Normally closed (NO/NC)


Range/Distance

Measuring range	0...20 m
Range	0...20 m
Rated operating distance S_n	20 m, Adjustable
Ripple max. (% of U_e)	15 %


Remarks

Order accessories separately.
For additional information, refer to user's guide.
The sensor is functional again after the overload has been eliminated.

Connector view



Wiring Diagram

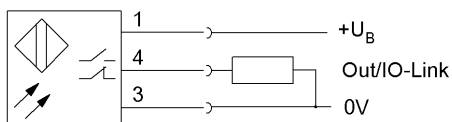

Symbols for Optoelectronic Sensors

